



SVENSKA RIDSPORT
FÖRBUNDET



Equestrian surfaces – a guide

FOREWORD

The Swedish University of Agricultural Sciences (SLU) pioneered modern research on functional properties of equine surfaces in the 1960s. The work of Professors Fredricson and Dreveno and their group led to trotting racetracks being banked.

Since then a large number of scientific papers have been published in the academic press by research groups from, for example, United States, United Kingdom, France, Japan and Sweden. A vast majority of these papers have been aimed at racetrack properties and their effect on the horse locomotion.

In 2007-2008 SLU initiated a project financed by the Fédération Equestre Internationale (FEI), World Horse Welfare and Swedish Foundation for Equine Research that was specifically aimed at equestrian arenas. It was titled "Evaluation" of training and competition surfaces in equestrian sport, and the consequences for improved welfare and orthopaedic health of horses that use them". The project combined epidemiological field studies of Jumping yards and arena testing and rider evaluation in Sweden, the Netherlands, Switzerland and the UK.

During this project, contact was established with Professor Michael Peterson in Maine (US) who had constructed a mechanical hoof, which was successfully used to test thoroughbred racetracks. The mechanical hoof was jointly adapted to better suit testing of equestrian arenas and a successful collaboration was formed with Dr. Rachel Murray's group at the Animal Health Trust and later on also Dr. Sarah Jane Hobbs at University of Central Lancashire and her collaborators at Anglia Ruskin University and Myerscough College.

An important outcome of this collaboration was the "White paper on equestrian surfaces", which was produced with Sarah Jane

as first author and which has been published by the FEI. Please have a look to see a list of all contributors and find more in depth information and references related to the present document.

In 2013, the FEI financed another research project with the aim of defining the relationship between subjective evaluation of arena properties and measurable parameters, as well as acceptable upper and lower limits for these parameters at major events. It was concluded that the subjective judgment of riders matches the objective measurements and this enables recommendations on a range of these measurements satisfying rider expectations for competition surfaces. This is something we will write more in detail about in coming editions of this publication.

During 2014, the Swedish Equestrian Federation sponsored and co-produced the Swedish version of the publication that you now hold in your hand. The majority of writing and compiling text was done by Doctors Cecilia Lönnell and Elin Hernlund. Thanks!

The FEI decided to finance a translation to English. Dr Cecilia Lönnell translated the text and the rest of the team – pictured below – did a thorough job with scientific scrutiny and editing. Many thanks to them all!

I am happy to be part of this joint effort that I expect will continue to develop knowledge around Equine surfaces and their influence on horse performance and soundness.



Professor Lars Roepstorff, Swedish University of Agricultural Sciences

THE SWEDISH EQUESTRIAN FEDERATION'S REFERENCE GROUP FOR RIDING SURFACES:



Elin Hernlund, Sweden
Text, structure and research.

Ph.D, DVM Equine biomechanics researcher, lecturer in equine orthopedics at the Swedish University of Agricultural Sciences. Key member of the FEI/WHW research Project on showjumping training, injury and Surface use.



Cecilia Lönnell, Sweden
Text, including popular science adaptation and research.

PhD, DVM. Research interest equine training and injury. Member of the FEI/WHW research Project on showjumping training, injury and surface use.



Lars Roepstorff, Sweden

Ph.D. Professor in Equine Functional Anatomy at the Swedish University of Agricultural Sciences (SLU). Led the FEI/WHW research project on showjumping training, injury and surface use.



Marcus Lundholm, Sweden

Project manager. B.Sc. in Equine Science, former stable manager at Flyinge (National) Stud. Now at the Swedish Equestrian Federation department for Riding schools and Equestrian Centres, responsible for equine management.



Björn Carlsson, Sweden

A-level jumping coach, former Swedish jumping Champion, chef d'equipe of the Swedish junior and Young Rider Jumping team and riding school manager.



Oliver Hoberg, Germany

International Equestrian Surfaces Consultant, competition surfaces a speciality.



Mikael Nord, Sweden

Sweden Equestrian surfaces advisor.



Anna Reily, Sweden

Riding School Adviser, Swedish Equestrian Federation.

THE INTERNATIONAL REVIEW AND BIOMECHANICAL COLLABORATION GROUP:



Hilary Clayton, US

Ph.D. In 1997 the first incumbent of the Mary Anne McPhail Dressage Chair in Equine Sports Medicine at Michigan State University. Past president of the American College of Veterinary Sports Medicine and Rehabilitation, and the Association for Equine Sports Medicine. Grand Prix Dressage rider. Member of the USEF Dressage Committee since 2009.



Agneta Egenvall, Sweden

Ph.D. Professor in veterinary epidemiology at the Swedish University of Agricultural Sciences, Uppsala, Sweden. Key member of FEI/WHW research project on Jumping training, injury and surface use.



Sarah Jane Hobbs, UK

Ph.D. Senior Lecturer in Sports Biomechanics at the University of Central Lancashire, Preston, UK. Member of the Research and Consultancy in Equine Surfaces (RACES) team. Research within the area of equine biomechanics and sport and exercise sciences. Key role in testing the equestrian surfaces for the 2012 London Olympics.



Christie Mahaffey, US

Ph.D. Racing Surfaces Testing Laboratory. Research interests focus on the relationships between the material composition in dirt surfaces, their structural design and how these factors influence horse biomechanics, with the goal of increased safety for both horses and riders.



Jaime Martin, UK

Ph.D. Myerscough College, UK. Primary research interests animal behaviour, environmental sciences and statistics. Member of the Research and Consultancy in Equine Surfaces (RACES) team. Key role in testing the equestrian surfaces for the 2012 London Olympics.



Rachel Murray, UK

Ph.D. Senior Equine Orthopaedic Advisor, The Animal Health Trust, UK. Specialises in research into lameness and sport horse performance problems. Dressage rider. Veterinary surgeon with the Great Britain Dressage and Jumping teams.



Alison Northrop, UK

M.Sc. Senior Lecturer in Zoology Anglia Ruskin University, Cambridge, UK. Research interest in equine biomechanics and exercise physiology. Member of the Research and Consultancy in Equine Surfaces (RACES) team. Key role in testing the equestrian surfaces for the 2012 London Olympics.



"Mick" Michael Peterson, US

Ph.D. Libra Foundation Professor of Engineering, University of Maine, United States. Research links traditional understanding of engineering mechanics and materials to the biomechanics of animals. Developed the Orono Biomechanical Surface Tester. Co-founder and Executive Director of the Racing Surfaces Testing Laboratory.



Jeff Thomason, Canada

Ph.D. Professor of Biomedical Sciences, Ontario Veterinary College, University of Guelph, Canada. Internationally-recognised for his research on the form and function of the equine hoof, co-author of racing surfaces White Paper.



Carolynne Tranquille, UK

B.Sc. Equine Orthopaedic Graduate Research Assistant at the Animal Health Trust, UK. Member of FEI/WHW research project on Jumping training, injury and surface use.



Vicky Walker, UK

B.Sc., M.Sc. Equine Orthopaedic Research Assistant at the Animal Health Trust, UK. Main focus of research is gait analysis of sport horses.

INTRODUCTION AND READING SUGGESTIONS

This document has been produced by the Swedish Equestrian Federation's reference group for riding surfaces. The reference group and its advisors include representatives of equestrian sport, riding schools and the Equestrian Federation, equine veterinary scientists from the Swedish University of Agricultural Sciences, and specialists with extensive practical experience of riding arena construction.

Traditionally, advice on the construction of riding arena surfaces have been based on experience and personal opinion, which can be subjective and lacking scientific rigour. In recent years this has changed, as research methods and equipment have been developed by scientists. This has allowed testing and analysis of riding surface properties, and their effects on the horse to be quantified. While this scientific work is still ongoing, the aim of the guide is to share current scientific data that applies to equestrian surfaces, in combination with practical know-how from experienced arena specialists.

The English version was reviewed by an international panel of leading biomechanics and equine surface researchers from the United States and the United Kingdom.

The guide can be read from beginning to end by the ambitious reader, but we offer the following suggestions regarding the most relevant chapters for your specific role and interests:

Are you a rider, coach, riding teacher, or otherwise active in equestrian sport, and want to increase your knowledge about, and understanding of, riding surfaces?

We suggest you read the introduction, then the chapters on training, the interaction between the hoof and the surface, surface

properties and materials, multipurpose arenas and competition, maintenance and arena testing.

Do you run an equestrian business, represent a riding school or plan to build or renovate your own riding arena?

We suggest you read the introduction, then the chapters on training, the interaction between the hoof and the surface, surface properties and materials, budgeting, environmental considerations, the building process, multipurpose arenas and competition, maintenance and preferably also arena testing.

Are you an entrepreneur owning a quarry/sandpit/building business with customers in equestrian sport and want to improve your knowledge about riding surfaces?

We suggest you read the introduction, the interaction between the hoof and the surface, surface properties and materials, environmental considerations, the building process, multipurpose arenas and competition, maintenance and preferably also arena testing.

This first edition of the guide focuses on sand-based outdoor and indoor arena surfaces, but discusses principles that also apply to any riding surface such as grass or roads.



THANK YOU!

The Swedish Equestrian Federation reference group expresses sincere thanks to its advisors Karsten Koch, Germany, for important advice on arena materials and maintenance (see own presentation and photo) Architect Mats Molén and Michael Ventorp at the Swedish University of Agricultural Sciences (SLU) who gave important input especially on the building process chapter.



▲ Karsten Koch is a riding surface consultant with over 30 years of experience. Like Oliver Hoberg he worked with the late surface expert Hermann Duckek. He has collaborated with Oliver Hoberg since 1994, including at international shows. Among his consultancy clients are riding schools.

Contents

1. Introduction **10**

EQUESTRIAN SURFACE BACKGROUND:

2. Training for soundness and performance **16**

The chapter in brief

Factors that influence equine soundness and performance

Basic principles of training

- Gradual increase of training and fitness
- Variation
- Specific training
- Individual training

Surface, training and injury risk

3. The interaction between the hoof and the surface **28**

The chapter in brief

Hoof landing and braking (touchdown)

Support phase (full contact and load)

Rollover (takeoff)

In depth

Films

4. Arenas, their function and properties **38**

The chapter in brief

Impact firmness

Cushioning

Responsiveness

Grip

Uniformity and consistency

In depth

5. Construction materials **50**

The chapter in brief

What type of rock (geology)?

- Natural sand
- Crushed rock

The grain shape/rounding

How big are the grains?

Specific size

More on sand and factors that influence the material

– How big is the natural fraction of fine materials such as silt and clay?

– What is “washed sand”?

– Water

Additives

– Fibre and textile

– Three important criteria to consider when ordering fibre or a fibre mix

– Proportion of textile and fibre

– Guidelines

– Choice of sand for fibre surfaces

– Installation and maintenance of fibre surfaces

Wood (chips/sawdust)

– Choice of sand for wood mixtures

Wax

Other materials

Unwanted material – Manure

In depth

INSTALLING AN ARENA:

6. Budget **74**

The chapter in brief

Personal resources and local conditions

The intensity and type of use of the arena

Other costs

7. Environment and sustainability **78**

The chapter in brief

8. Construction principles **82**

The chapter in brief

Principles of the arena construction

Base layer and drainage

Separations

Middle layer

Top/surface layer

Water control/drainage

In depth

Arena building suggestions for those scratching their head

Three examples and suggestions

– A. Outdoor arena for a limited budget

– B. Outdoor/indoor at slightly higher cost

– C. Sand-fibre indoor arena

– D. Sand-wood indoor arena

9. The Building Process **98**

To do list

Timeline

Tenders

– Permits

– Land and soil testing

– Size

– Plan the surroundings

– Water access

– Laws and permits

– Final disposal

ONCE THE ARENA IS IN PLACE:

10. Competition, multi-purpose arenas and problem solving **104**

The chapter in brief

Maintenance and competition

Planning for competitions

Common faults and suggested solutions

11. Maintenance and renovations **112**

The chapter in brief

It is important to visualise the

maintenance aims

Arena staff

Watering

Maintenance equipment

Learn from the pros – “how to” videos

– Equestrian maintenance – for equine soundness and health

– Dragging, harrowing and common driving patterns

– Keep the arena free from manure!

– Equipment

– Irrigation

– Driving patterns for arena maintenance

Maintenance plans

How to

Salt

12. Functional testing **132**

The chapter in brief

The orono biomechanical surface tester

Competition arena testing

13. Grass **138**

The chapter in brief

Advisors on the chapter

Background, tradition

Grass arena or track – not just leaves of grass

Working with your soil

Water and water permeability

Air (and decompaction)

So you want (to use) a grass arena och track?

Maintenance

Maintenance analysis

Machinery

Stud use

Case study



Equestrian surfaces – a guide is a joint venture between the Swedish Equestrian Federation and the Swedish University of Agricultural Sciences.

Design: dizain.se Cover: Bildbyrån/Nils Jakobsson
Production: Svenska Ridsportförbundet Information och Media
Version 4 oktober 2021. © Svenska Ridsportförbundet



1 Introduction

Know-how is important in order to install a good riding arena surface. Today, findings from scientific research into equine surfaces can be combined with specialists' practical experience to produce a good surface. But there is no single recipe for a riding arena.



◀ The surface for the equestrian Olympics arena at Greenwich, London in 2012 was developed with the aid of mechanical surface testing described in this guide, and conducted by scientist members of the reference and review groups listed on page 4 and 5. A unique feature of this surface was the fact that it was not laid on the ground but on a platform (see inset) above it. This also posed a main challenge regarding the arena properties.

Equestrian arena surfaces are a major investment for stable owners, riding clubs and private horse owners. With the growth of equestrian sport in recent decades, both in terms of financial turnover and number of participants, demands on and expectations on equestrian surfaces have increased. Surfaces are expected to promote both performance and soundness.

Scientific testing of equine surfaces was first developed within Thoroughbred and Standardbred racing, where for decades scientists have studied associations between orthopaedic injury and surface properties. The background of biomechanical research into equine surfaces is described in more detail in the foreword. Thanks to these studies the information in this guide is supported by scientific data and on-going research.

The guide also utilises advice from international arena consultants and equestrian professionals with years of practical experience of building and maintaining surfaces.

The guide is aimed at those who want to build or renovate a riding arena, or those who require more knowledge about riding surfaces. Furthermore the guide provides advice on building and maintaining an indoor or outdoor arena.

Many equestrians discuss and want an answer to what is "the best" riding surface. As this guide shows, it is wiser to talk about a 'surface that is most suited to your and your horse's needs', and that how well it works will also depend on how you treat it.

Firstly, it is important to understand the difference between surface materials and surface properties. The properties of any surface material can differ from day to day, depending on use, maintenance and environmental factors. The current properties of the surface and the immediate decisions the rider makes for that training session directly affect the horse. Different materials and construction principles can be used to provide surfaces with the same properties, but day-to-day maintenance strategies will also play a role in the properties of the surface.

Several factors should be used to decide on the type of construction and the materials you select for your arena. These include the needs of the yard/stable, your current financial resources for the initial construction and your long-term resources for maintenance, the local climate and soil type. The basic ingredient in arena surfaces are usually sand, although in some countries other material, such as rubber or woodchips, is the only top layer ingredient. When using sand, the type of sand that is readily available varies greatly between and even within countries, depending on source. Consequently, you will not find one single “prescription” or “recipe”. This guide instead gives suggestions and guidelines for different solutions. The chapter on the building process provides advice on choosing a building contractor or “Do it yourself”.

Another important point when installing a riding surface is to keep a broader perspective in relation to environmental considerations and the importance of continuous, appropriate maintenance. Moisture content, for example, is a key environmental factor that will affect surface properties.

An electronic version of this document is available and will be updated annually to incorporate new scientific findings.

GUIDE TAKE HOME MESSAGE

- Similar surface properties can be obtained with different material
- It is the properties of a surface rather than the material it is composed of that affect the horse
- The properties of the same arena will change based on wear (use), maintenance and environmental factors
- The risk of injury on a surface is to a large extent determined by how it is used. This means that riding intensity, speed, duration and frequency as well as the type of work you do on a surface are as important as the properties
- Variation of surface use and a gradual introduction to different surfaces should be an important factor in a horse’s training plan
- As a private individual customer it is difficult to get sufficient data on sand for riding arenas. A sieve analysis of the sand is a start but is not enough. Obtain help and advice from an appropriate expert, or alternatively get an analysis of the sand in an arena you know works well
- A riding surface is only as good as the maintenance programme
- Water (moisture) is one of the most important factors for influencing properties of a surface

2 Training for soundness and performance

Soundness and performance are often cited as the motivation for constructing, maintaining and using a riding surface. In this context it is very important to be aware that the single most important factor for both soundness and performance is how the horse is trained and managed.



THE CHAPTER IN BRIEF

Soundness and performance are the main focus in most discussions of riding surfaces. Lameness and back pain are the most common problems requiring veterinary care and leading to loss of use in equestrian sport. Whether a horse is sound of course depends on an intricate combination of internal (often inborn) factors such as breeding, conformation, age, training history and previous injury plus external factors such as training and surface use. When it comes to soundness external risk factors are much easier to influence than internal risk factors.

In common with humans and other animals horses benefit from exercise and natural movement. Lack of work can be a bigger health risk than exercise and training, but training can also increase the risk of injury. If the horse is expected to perform without an adequate work up or to do repetitive work over long time periods, then habitual movements can have degenerative effects just as they do in human athletes and in the workplace.

Scientific research on race and sport horse orthopaedic injuries has found that the risk of injury differs between yards/riders/trainers. Studies have also shown that training and surface use interact to influence injury risk.

Four important principles to follow in planning a horse's work:

1. Gradual increase of training and fitness
2. Variation in the type of work
3. Skill-specific training
4. Individual adjustments

Description of a training session (or plan) should include definitions of:

- Type of activity
- Duration (time and/or distance)
- Intensity (level of exertion)

We want to begin this guide with an overview of training principles and their association with soundness and performance.

We have already mentioned some essential training principles that are important to keep in mind in view of performance and soundness. They are as relevant for a horse as for a human who is actively engaged in a sport or physical work.

“The most important principle in training is that the work must be increased gradually”

This is a statement from Professor Gerhard Forsell, the Swedish team vet at the 1912 Olympics in Stockholm and later regarded as a veterinary legend, in his 1927 book “About the Horse, Its Anatomical Conformation, Management and Diseases”, which was produced as a handbook for a Federation rider badge.

How the quality of riding in itself influences equine soundness is a fairly new area of research. But a study of riding school horses by the surface research group at SLU showed that riding schools with a low incidence of orthopaedic injury more often had highly trained riding teachers and experienced riding school managers.

FACTORS THAT INFLUENCE EQUINE SOUNDNESS AND PERFORMANCE

Graph: Lars Roepstorff and Linda Eriksson



The soundness and performance of a horse is influenced by complicated associations of many factors, where riding surface and training both play an important part.

BASIC PRINCIPLES OF TRAINING

Gradual increase of training and fitness

One obvious principle for most people who have had any experience of physical training is that muscle adapts and is “rebuilt” in response to training, getting larger and stronger depending on the type of exercise. This requires a gradual progression over time, or the muscle risks being overloaded and injured. Building fitness also requires a gradual process. Fitness is the body’s capacity to use oxygen, involving the lungs, heart, blood and muscle, which can all be trained. It is important to understand that the musculoskeletal system also includes bone, cartilage, tendons and ligaments that adapt to training and work. Bone increases in density and strength, cartilage increases in thickness and fluidity, and tendons and ligaments benefit from improved coordination and proprioception. Bone, cartilage and tendons/ligaments take much longer than the lungs or muscles, to adapt to new activity, or an increase in intensity/volume, which if ignored can lead to an increase in injury risk.

A key factor in training for both soundness and performance is therefore to increase the workload gradually with respect to type, volume, intensity and recovery. As in all sports it is especially important that the young or previously untrained individual is allowed to build physical strength through well planned basic training, before making more specific demands, for example, jumping or dressage. The same principle holds for rehabilitation after an injury.



► Variation of training is an important factor in training if it is going to have the desired effect. Lack of variation can increase injury risk.

Variation

Continuity is an important aspect of training if it is going to have any lasting effect. One or two sessions at the gym makes little difference for a person, or can even increase injury risk. The same goes for horses; without regular repetition any training effect or improvement in fitness will be minimal.

At the same time it is important to include variation, based on training activity, volume and intensity plus rest and recovery. The variation is aimed at increasing the total training effect and decreasing the injury risk, both long and short term. If the horse's daily training is carried out at low intensity, injury risk will increase on occasions when the horse is subjected to higher loads as fatigue is a known risk factor for injury. Muscles play a role in absorbing the work load, and when the horse tires the load on tendons, ligaments and cartilage increases. It is therefore important to include fitness training to improve the horse's physical endurance but again there should be a gradual increase in demands. Attempts to go "fast forward" in training can result in fatigue and subsequent injury.

One method to increase the training effect in a controlled manner is interval training. This means that the horse performs repeated bouts of work separated by rest intervals—that allow partial recovery. The intensity and length of the exercise bouts will be tailored to what the horse is being trained for.

Training variation promotes general strength and endurance, which in turn can be expected to promote long-term soundness. Training variation helps balance the need for "rebuilding" or adaptation, which is an important part of the effect of training.

Based on experience, training variation also helps promote mental motivation in both the horse and human athlete.

Human sports research has shown that balance and coordination are important factors in injury prevention. A horse who is only ridden in an outdoor or indoor arena will have very limited chances to develop balance and coordination, compared to a horse that is also hacked out on different types of terrain. The quality of riding can also be expected to influence the extent to which the horse is able to move in balance.





◀ Dressage horses need very specific training to perform advanced moments. At the same time it is important not to forget other aspects of training that strengthen the horse's fitness and supportive tissues.

Specific training

Once the basic training and conditioning is done the horse needs to adapt gradually to the type and amount of work that will be expected in competition or other full work. This requires specific training of technical skills, such as motor and mental control, through jumping exercises or dressage movements depending on the main discipline of the horse. Specific training may also involve communication with the rider or developing specific strength, speed or endurance.

Any changes in training or work load must happen gradually, also when changing riders or discipline. A dressage or jumping horse being prepared for eventing requires adequate time to be prepared for the new discipline.

An advantage of specific training is that it makes it easier to balance the volume and intensity of work so that you get a training effect with less risk of overloading. One obvious human example of specific training is strength training in a gym. If we can develop exercises for our horses on similar lines, this would help to make training more efficient and safer.

Individual training

There is no universal recipe for successful training that works for all horses. Horses are individuals with different temperaments, conformation and movement, which must be taken into account in all training. Individual training also means that you monitor how each horse responds, making modifications if the effects are negative or in other ways unwanted. If the horse shows signs of fatigue then the trainer must make short-term changes and, if these are unsuccessful, then long-term changes are required. Individual training is, to a major extent, a question of learning to “read” each horse.

SURFACE, TRAINING AND INJURY RISK

When discussing surfaces in relation to performance and reducing injury risk it is important to remember that the way you use a surface is as important as which surface you use and its properties.

Training variation means riding on a variety of surfaces! This includes using more than one arena, but especially riding on varied natural terrain, (quiet) roads and riding paths. The body of the horse adapts to the surface used. If the horse is constantly ridden on the same surface the musculoskeletal system is not prepared for any variations, thereby increasing the risk of injury.

Surfaces can also be used as a part of a training regimen aimed at promoting soundness. British riders have a tradition of roadwork, with gradually increased distances of walk and trot on roads/tarmac. There is one school of thought that road work strengthens the musculoskeletal system, while based on other traditional experience it is part of a gradual conditioning programme to develop a better conditioned horse that will have less risk of fatigue and thus less risk of injury.

Surface properties can affect both performance and the risk of injury. One dilemma is that properties that aid “better performance” also increase the load on the horse’s musculoskeletal system and can increase injury risk. One example is a surface which is very firm/hard and/or excessively “grippy”, making it

is easier for the rider to ride fast and turn quickly. Higher speed in itself also increases the load on the horse’s leg.

If the horse competes on a surface with certain properties, the training preparation should include exercising on the same type of surface to allow for adaptation. If you are going to compete on grass, it is preferable for the horse to also train on grass. Prior training on surfaces that the horse will use at competition should allow the horse to experience the surface properties at a reduced work intensity, rather than having to do this while also being asked to perform to its optimum level during competition. Adaptation has several aspects, one of which is that the horse’s pattern of movement is changed and probably adjusted to different surfaces. An example is the observation that horses not used to working on fibre sand tend to trip in the beginning until they get used to it. Adaptation is also a question of rebuilding the musculoskeletal system in line with the demands. This can take weeks or even months.



WHAT DOES RESEARCH SAY?

Professor Agneta Egenvall at SLU has led a field study registering the training and health of jumping horses over a period of about six months. Results showed an association between the number of days lost to training due to injury, training factors and surface use.



[CLICK AND READ MORE](#)



Photo: Jessica Ortiz Bergström

By far the most important factor for performance and soundness is how the horse is trained!



3 The interaction between the hoof and the surface

The leg and hoof of the horse have withstood great forces when the hoof hits the ground, when it carries the full weight of the horse, as well as well as during turns and when increasing or decreasing speed. Several factors influence the force and load on the leg; the properties of the surface, shoeing, the conformation of the horse, gait, speed and direction.

THE CHAPTER IN BRIEF

At high speed the hoof is only on the ground for a fraction of a second in each stride, but in this brief moment three phases occur, that will affect the horse in very different ways.

The forces acting on the leg when the hoof is on the ground will have different directions and magnitude. These effects will also depend on the surface properties (for example, whether the surface is hard or soft), the conformation of the horse and how the horse has been shod etc. The phases are:


- **HOOF LANDING/TOUCHDOWN** – the hoof hits the ground and brakes/slides to a stop.
- **SUPPORT PHASE/FULL CONTACT AND LOAD** – the whole hoof is in contact with the ground and carries the weight of the horse, (and the equivalent of more at speed – up to two and a half times the horse’s weight at full gallop and likely considerably higher when landing after a high fence).
- **ROLLOVER/TAKEOFF** – Propulsion into the next stride, when the hoof leaves the ground starting with the heels, and ”rolls” over the toe.



A stride is defined from the time when the hoof touches the ground until the next time it touches the ground in the subsequent stride. The stride is divided into 1) the support phase, when the hoof is in contact with the ground and 2) the swing phase, when the hoof is in the air. The support phase can be subdivided into three parts that are relevant to the discussion of surfaces and their effects on the horse. The three parts are described in detail below.

Over millions of years, the horse has evolved into having a large body with strong muscles but slim legs and a small, light hoof. This is a requisite for energy efficient, fast running. The modern horse runs on the equivalent of a human middle finger or middle toe. The hoof corresponds to a well-developed nail. When a horse is running fast the braking effect that occurs when the hoof hits the ground is very pronounced. The result is high forces acting on the leg. If the hoof was heavier the forces when the hoof hits the ground would be too high for the leg to withstand.

The phases of the support phase:

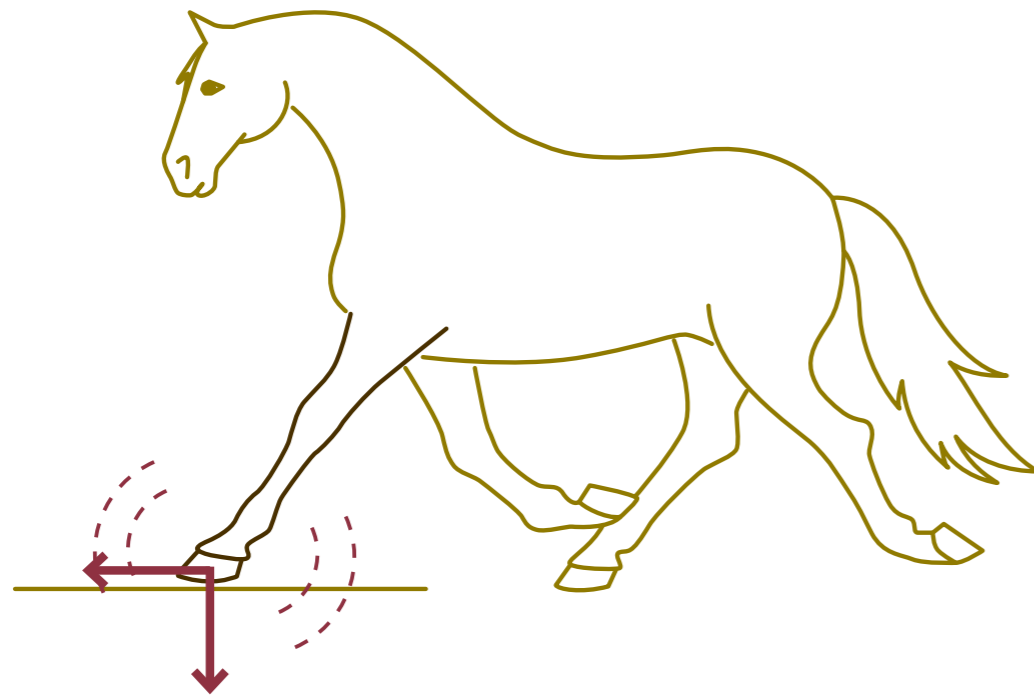

HOOF LANDING AND BRAKING (TOUCHDOWN)

First only the hoof first touches the ground, with no influence of the body weight. The body then “sinks” closer to the ground as segment after segment (the bones) of the horse’s leg “collide” with each other, rather like a pileup on a road.

The hoof landing means a rapid braking effect during which the hoof slides forward and downward into the surface. The impact and braking forces transmit shockwaves and vibrations through the hoof, joints and bones in lower part of the leg. The harder the surface and the more grip it has, the more shockwaves and vibrations the leg experiences. The hoof is pushed forward into the surface from

above, while the top layer of the surface provides traction.

NOTE: Injury risks in this phase mainly affect the hoof and the distal part of the leg. The greater the braking effect on the hoof from a surface that have a high degree of “grip”, the greater the forces acting on the leg. On a surface with less grip the hoof will slides further and this helps absorb some of the force. Therefore there should be a certain “slide” in the surface to avoid heavy loads on the lower part of the leg.


Drawing: Elin Hernlund and Linda Eriksson

SUPPORT PHASE (FULL CONTACT AND LOAD)

The support phase begins when the hoof stops sliding/braking and is in full contact with the ground. The hoof and leg are loaded from above by the full weight of the horse. The fetlock joint sinks towards the ground and the flexor tendons and suspensory apparatus are stretched. This gives the leg a shock absorbing and elastic effect, which is an important contributor to the horse’s running ability.

NOTE: The injury risk in this phase mainly affects the tendons, ligaments, joints and bone, due to the large forces they experience.

Drawing: Elin Hernlund and Linda Eriksson

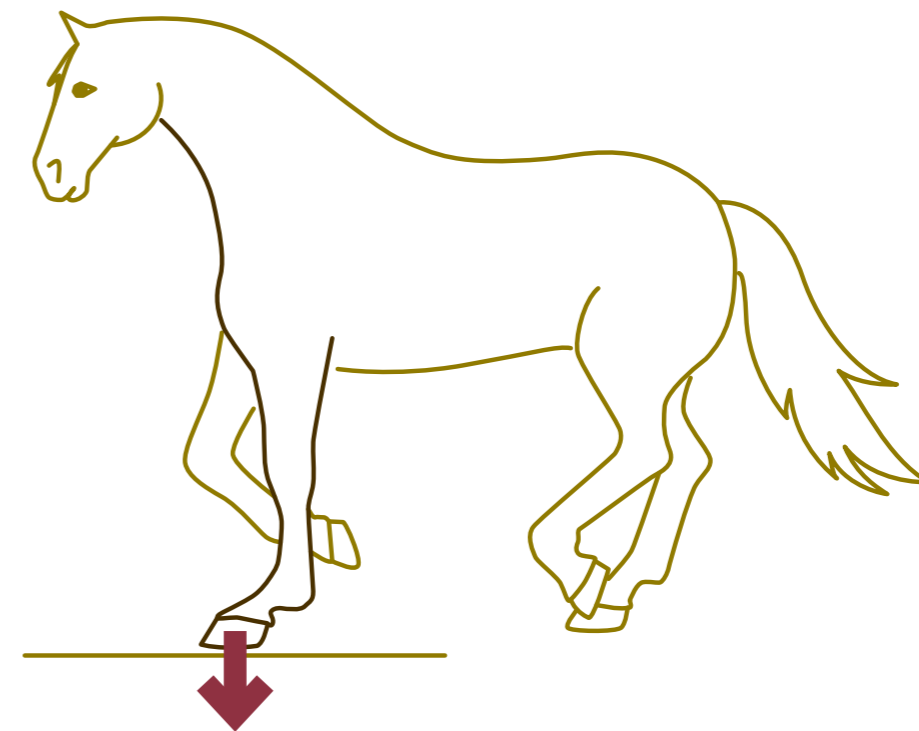


ROLLOVER (TAKEOFF)

At the end of the support phase the horse in effect braces the hoof against the ground, propelling the leg forward. At that moment surface grip (friction and shear strength) is important for the hoof to get sufficient traction. This final phase before the hoof leaves the ground is called rollover (or breakover). The hoof lifts at the heels first and "rolls over" the toe.

NOTE: This phase loads the ligaments, the hoof wall and the tip of the coffin bone and there is a final marked stretch of the superficial digital flexor tendon. The result is that the hoof and leg swing forward in a semi-automatic way.

Drawing: Elin Hernlund and Linda Eriksson

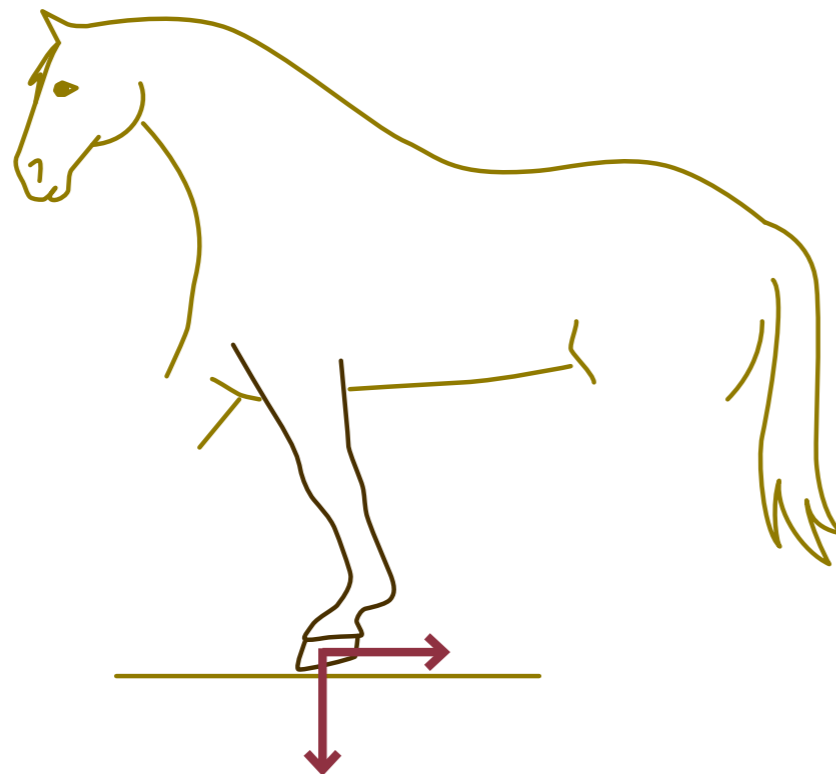

The load on a front leg during the support phase at a canter has been estimated at 2.5 times the horse's body weight.

IN DEPTH

On the next pages you can view in detail what happens when a hoof lands on different surfaces. The movie clips are filmed with a high speed camera capturing 1000 frames per second. The red line shows horizontal (forward) speed and the blue line shows vertical (downward) speed. The green line show dynamically the time in data series corresponding to the video frame shown.

The film material is part of a research project on arena surfaces for jumping horses conducted by the equine surfaces group at the Swedish University of Agricultural Sciences (SLU).




CLICK AND READ MORE


[Here is the scientific article published based on the high speed hoof landing films.](#)

Hoof landing on a grass surface

Films: Elin Hernlund Graphs: Lars Roepstorff

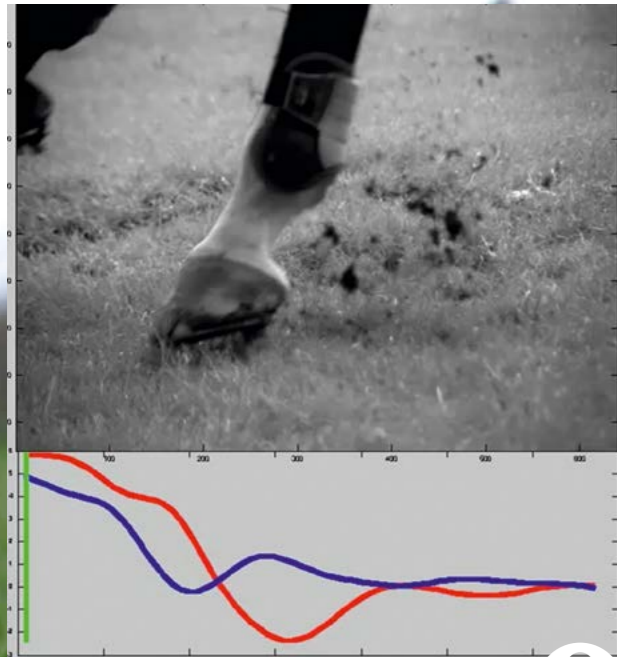

GRASS OUTER HIND LEG

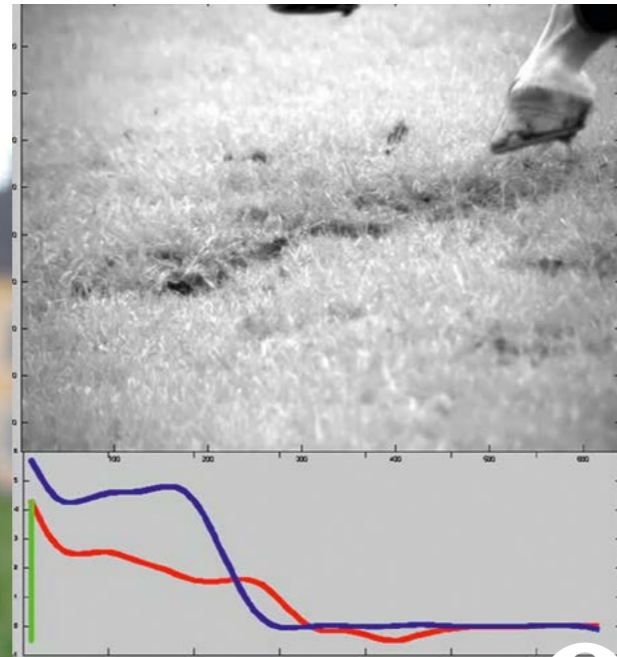


GRASS OUTER FORE LEG




Hoof landing on sand only surface


Films: Elin Hernlund Graphs: Lars Roepstorff

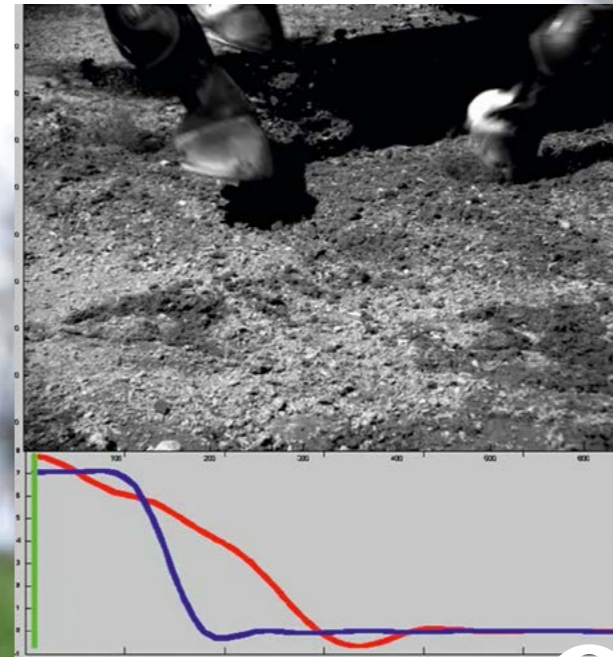


SAND OUTER HIND LEG

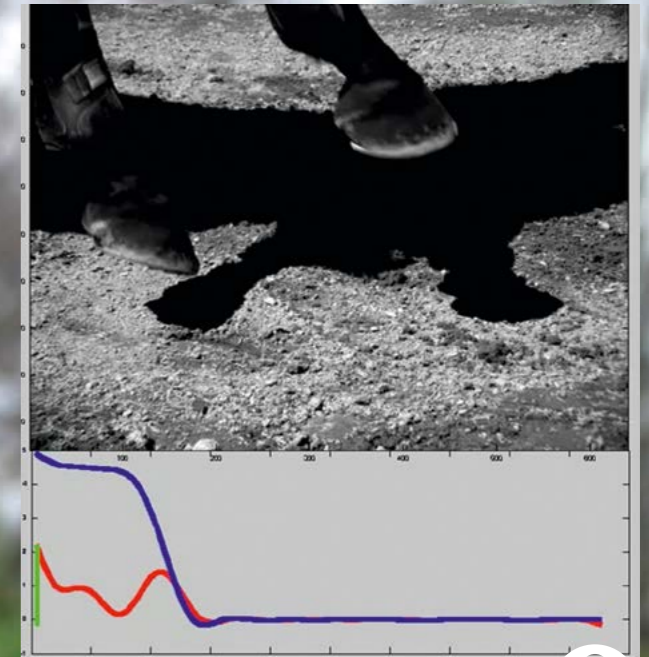


SAND OUTER FORE LEG

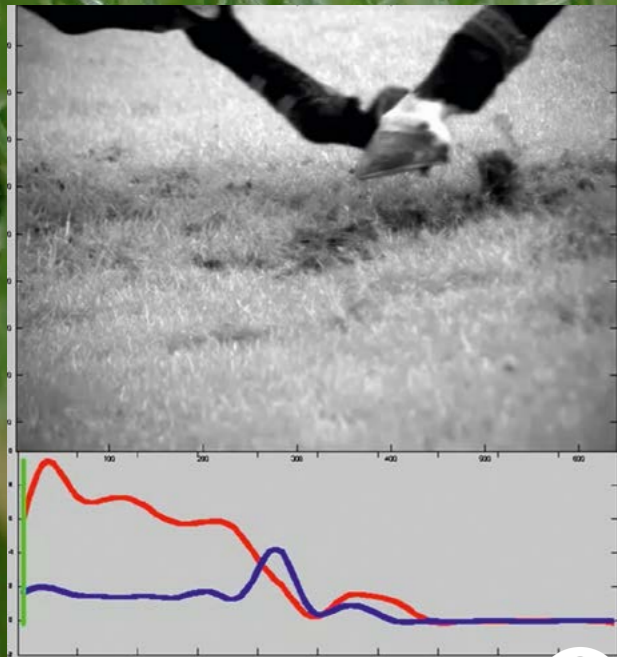


GRASS INNER HIND LEG

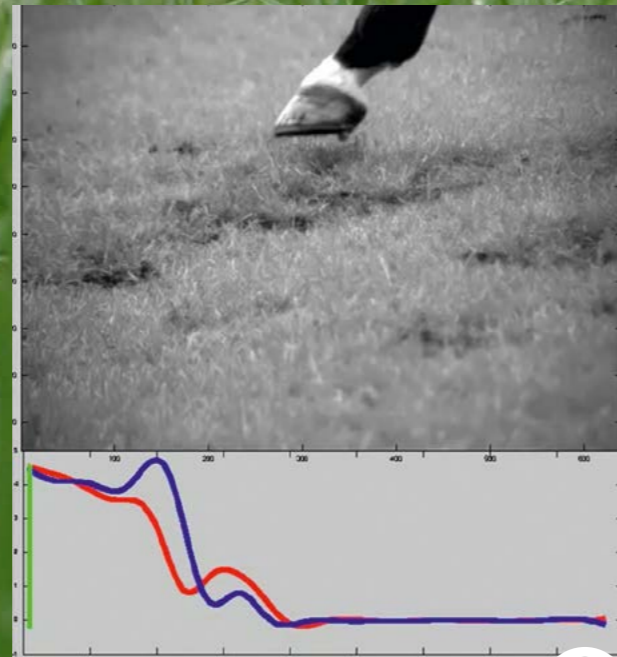

GRASS INNER FORE LEG

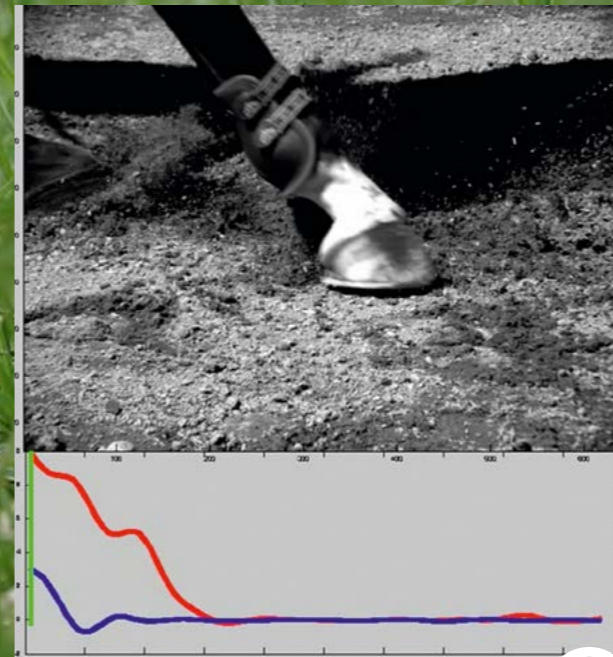

SAND INNER HIND LEG

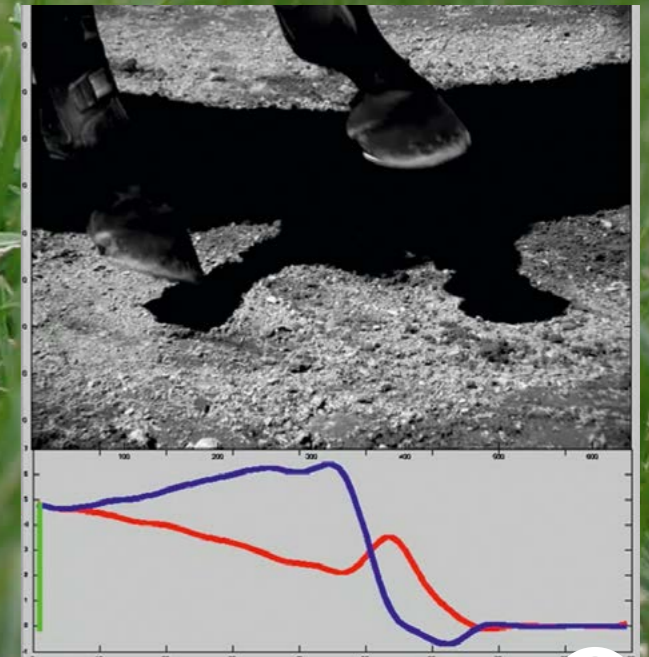

SAND INNER FORE LEG



4 Arenas, their function and properties

How a riding surface functions must be characterised based on how it responds to the load from the horse. It is important to find a common set of terms that define these effects.



THE CHAPTER IN BRIEF

How do you characterise a riding surface?

It is the properties of a surface that affect the horse. To characterise a surface we therefore need to define terms to describe these key functional properties. With support from the FEI/World Horse Welfare the equestrian surface scientists in Sweden together with colleagues in the US, the Netherlands, Switzerland and the United Kingdom, have developed a “profile” to characterise riding surfaces. The aim of this profile is to offer all riders definitions that describe an arena, where the profile can also be evaluated objectively by mechanical testing ([see chapter 12 ”Functional testing”](#)). Try and evaluate your own arena using these criteria!

- Is the arena hard and rigid or does it offer shock absorption?

THIS IS DETERMINED BY THE: Impact firmness and cushioning

- Does the surface offer the horse good traction and grip, but also help to absorb the braking force when the hoof first hits the ground?

THIS IS DETERMINED BY THE: Grip and impact firmness

- Does the whole arena offer the same properties?

THIS IS DETERMINED BY THE: Uniformity

Arena surfaces used in equestrian sports are mainly composed of sand and sand mixes. (Other types of arenas, such as grass arenas and those based on woodchips, rubber, dirt, etc are not included in this first edition of the guide). It is important to understand that especially sand based surfaces behave differently depending on what forces or loads they are subjected to and at what speed they are loaded. Imagine a mouse and a horse moving across the same arena – they would have very different opinions on how it feels! This is because a surface can feel stiff for a lightweight individual while it feels softer to someone who is heavier. This is because the lighter load does not deform the surface. This also means that what a rider feels when walking across an arena is likely different to what the horse feels.

When a horse lands on a surface, for example, after jumping a fence, the impact with the surface is at high speed and there is a large amount of weight loading the limb. Therefore the horse will “feel” characteristics deeper down in the surface compared to a human who tries to “test” the surface by jumping up and down in the same spot. For humans with their lighter weight it is easier to determine characteristics of the top layer.

This chapter describes five criteria to describe the properties that characterize a riding surface:



[CLICK AND READ MORE](#)
(scientific White Paper)



IMPACT FIRMNESS


Influences the mechanical shock experienced by the horse when the hoof first hits the ground.


This relates to the hardness of the top layer of the surface. How firm/loose is it? How high is the impact shock when the hoof lands, and how much can the hoof rotate into the top layer? Tarmac and concrete have maximal impact firmness.

EXAMPLES: If you put a layer of a few centimetres of sand on top of the tarmac,

the impact firmness would be considerably reduced, while the surface would still provide solid support for the hoof. Another example is if wooden boards were laid on top of wet clay to protect the horses' feet from sinking into the soft earth, the impact firmness of the wood would be greater than that of the sand on top of tarmac, but the surface would still give under the horse.

Drawing: Elin Hernlund and Linda Eriksson

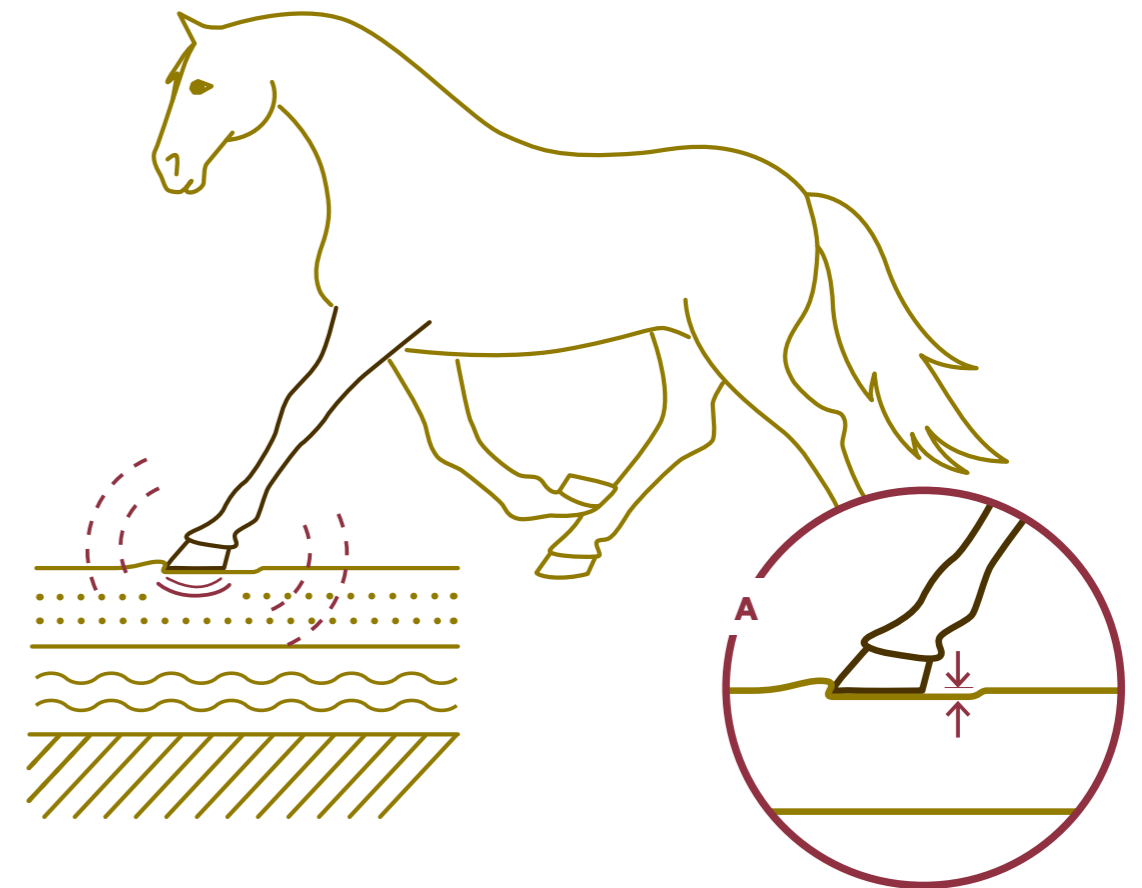

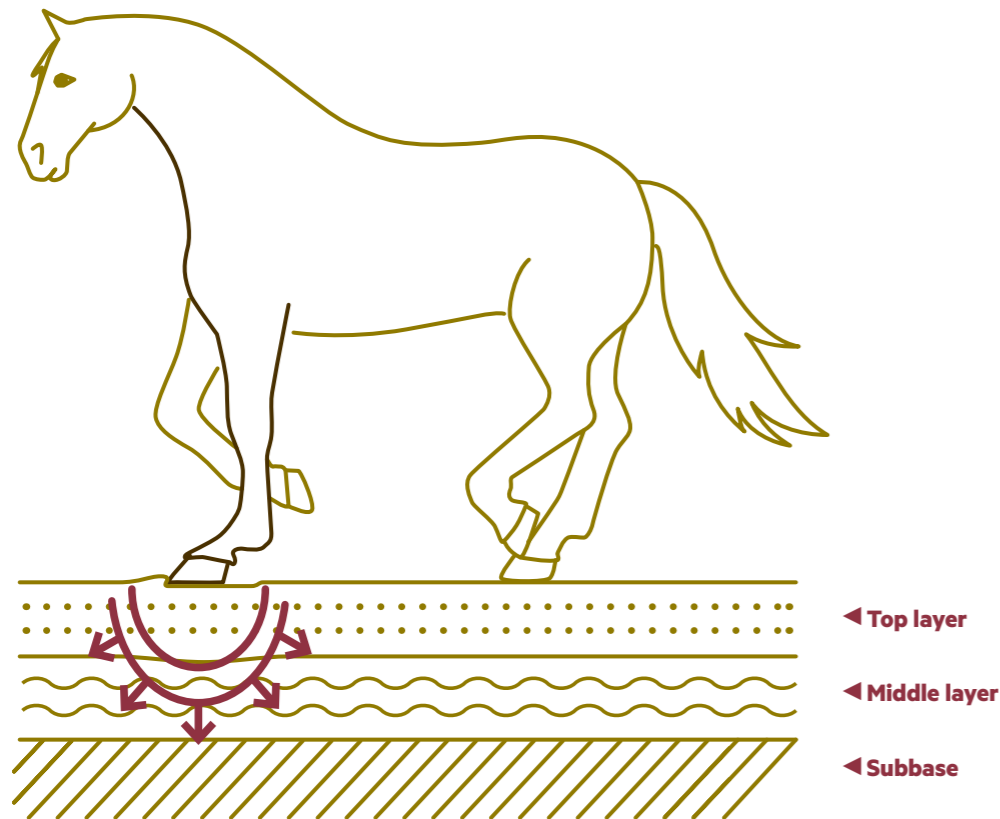

CUSHIONING

Cushioning describes how the surface is able to dampen and reduce the maximum force, when the horse puts its full weight on the leg during the support phase.

Cushioning (or force reduction) refers to how all the layers of the riding surface react to the force applied when it is loaded from above by the weight of the horse. A surface that provides good cushioning can reduce the stress and strain on the horse's leg when the hoof is in full contact with the ground. A surface with less cushioning is described as stiff or hard. Obviously there is also an association between the cushioning effect and impact firmness. When the hoof leaves an imprint on the surface due to compaction by the weight of the horse, this also provides shock absorption. It is nonetheless important to understand that cushioning is not only dependent on the hardness of the superficial top layer. A minor response in the lower layers can provide good shock absorption for the horse.


With riding arenas it is common to achieve cushioning by working with materials that deform under the hoof (by compaction). Decompaction can be achieved naturally with

an “elastic” material (a moist fibre sand, a springy rubber layer beneath the surface), or by maintenance (harrowing). So cushioning can be achieved either by a footing with a loose surface, or with an elastic footing. When we discuss cushioning we only mean the cushioning ability. The difference between an elastic surface and deep loose surface is discussed in the next parameter.

EXAMPLE: A compacted surface with no cushioning can help the horse perform very well because it provides solid support for the hoof, but the horse may also be injured much more quickly because such a surface offers very little shock absorption and the loads on the limb may become too high. On the contrary, a deep surface deforms as the hoof pushes against it, rather than resisting the push the push would provide too much cushioning. To perform well on this surface the horse would need to work harder, so may fatigue more quickly.

An example of a surface that has cushioning without elasticity is a sandy beach with dry, deep sand.

Drawing: Elin Hernlund and Linda Eriksson

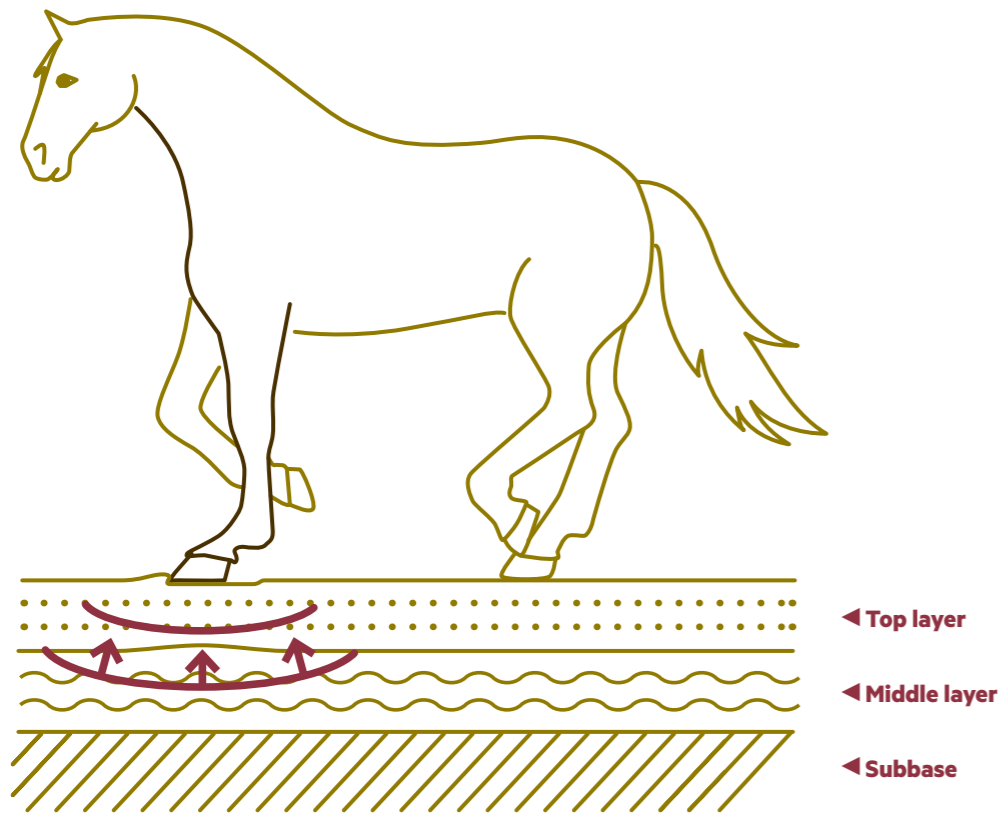

RESPONSIVENESS

How active or springy the surface feels to the horse.

Responsiveness in a surface can be likened to using a trampoline; after the surface has been pushed downwards by the weight of the horse it can spring back and aid the horse in pushing off into the next stride. It gives energy back to the horse. The natural frequency (tuning) of the surface determines the timing of the rebound. If the rebound is well timed to the locomotion to the horse the surface will feel

springy or active. The opposite is a “dead” surface. Responsiveness is also influenced by the stiffness of the surface, so it is closely related to cushioning. A very compacted surface may rebound too quickly to return energy to the horse, so it would also feel stiff, and “dead”.

As the horse’s body has a lot of inbuilt elasticity the responsiveness of the surface can be difficult for the rider to judge.

Drawing: Elin Hernlund and Linda Eriksson

GRIP

Affects how much the horse’s hoof slides during landing, turning and pushing off.


Grip is determined by both surface friction and how well the top layer and the materials beneath interlock and hold the surface together to provide traction. Surface grip is important when the hoof lands, when the horse turns and during propulsion.

The friction on the surface affects the hoof landing. It is important that the hoof can slide somewhat on landing as that helps to absorb the impact. Meanwhile the hoof should not slide too much, as this means the surface is slippery. When the horse pushes off, the materials beneath the surface must

withstand the push. The same principle holds on turns. At what angle the hoof lands and the speed of the horse is also important for how much grip the hoof needs and gets. Achieving the right balance of grip is a challenge for anyone wanting to produce a good riding surface as not too much and not too little is important for injury prevention.

EXAMPLE: A high grip surface would stop the hoof too quickly, whereas on a slippery surface the hoof would slide too much.

Drawing: Elin Hernlund and Linda Eriksson

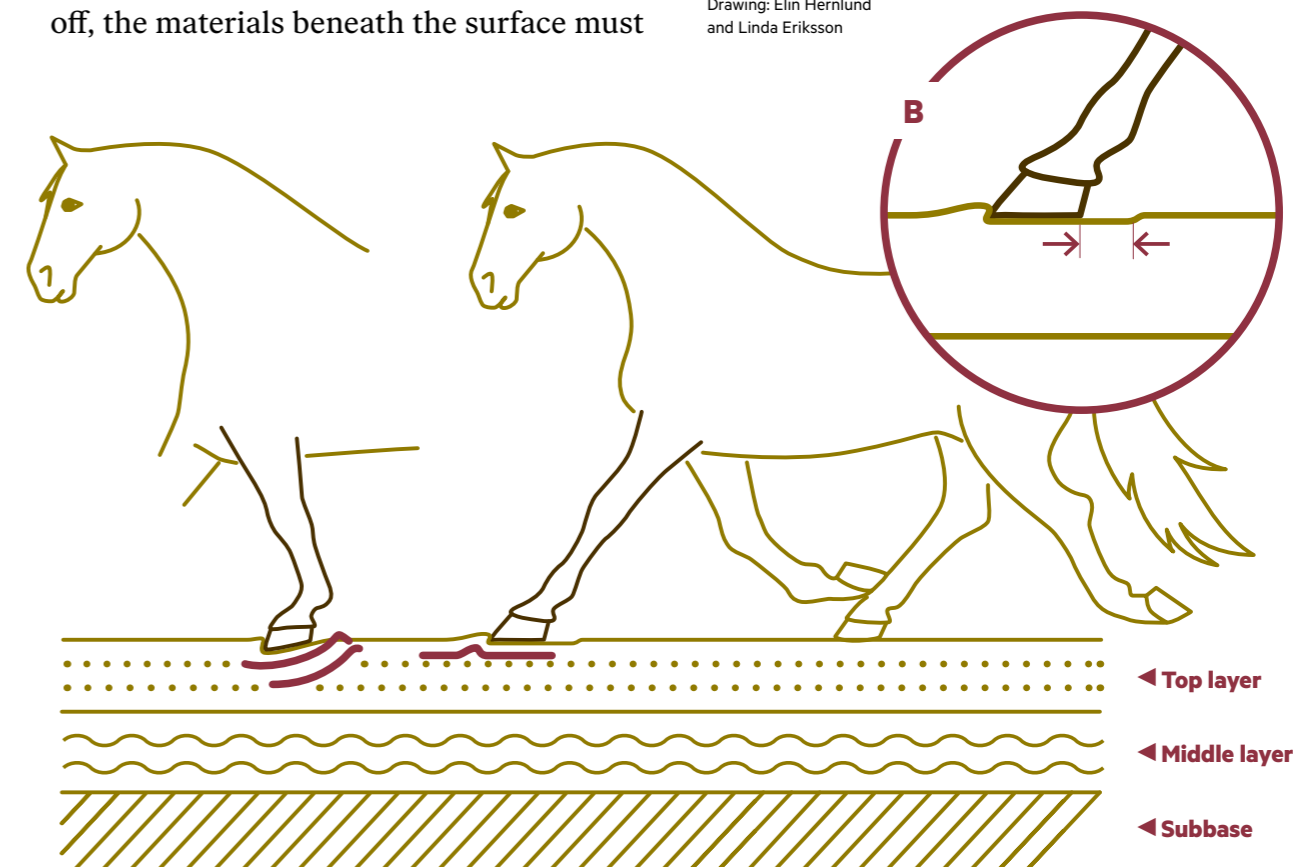

UNIFORMITY AND CONSISTENCY

These properties are concerned with how uniform the surface feels from stride to stride as the horse moves over it. Remember that an arena can look even and yet not be uniform!

Uniformity describes how much the characteristics vary across a whole arena. A surface can be even and look level, but as you ride across it the impact firmness, cushioning and grip change. If these changes are quite small and gradual or readily visible the horse can probably adapt quite well. But if the variations within the arena are greater and more frequent the horse can find it difficult to adapt, and is more likely to trip, or even get injured. Some arena surfaces may also be unlevel in the sense that they are not flat, and are then likely to vary in their properties.



The profile or properties of an arena will change depending on moisture content and maintenance.



5 Construction materials

Sand, gravel and other materials used for surfaces are a science in themselves. Chapter five gives an introduction and overview and points out characteristics that are valuable to be aware of when building or renovating a riding arena.

THE CHAPTER IN BRIEF

We often use the word sand for the material, which is the major ingredient in a riding arena, but this is a rather non-specific term. It is preferable for the material to be defined based on the following characteristics:

- 1 Is it natural sand or manufactured material from crushed rock?
- 2 What is the geological origin of the material?
- 3 Sand and gravel are granular materials resulting from the natural disintegration of rock or from rock crushed in an aggregates crushing plant.
- 4 The fraction of fine materials such as silt and clay.
- 5 Additional additive materials such as fibre, wax or wood.

These characteristics are important to understand since they affect the properties of your arena. One example is the size of the grains of sand, which are described according to their diameter in millimetres, mm. However, this does not describe the distribution of these sizes, which affects the properties of an arena. Availability of different sand qualities varies with locality and may influence your transportation costs. Research has found that you can get very similar properties in arenas with different materials. Therefore, you have a choice of solutions to obtain the “right” arena by, for example, adding other materials such as wood, wax, rubber or fibre to sand. The functional properties of sand are significantly affected by water (moisture) content. To find the best solution it is important to understand the properties of the materials and how you can affect them with maintenance.

It can be a challenge to try and understand something as different as sand and gravel when your real interest is horses and equestrian sport. But for someone who wants to build a riding arena it can be essential. As the consumer, you need to become aware of what factors influence the properties of the sand and the maintenance required to retain the properties of the material. The specifications of materials sold from quarries are normally insufficient. Hopefully, within a near future, we will have access to better analysis, which will provide more relevant information about the material before buying. Unless a ready-made surface is purchased from a commercial producer, in general it is best to get help from specialists with experience with the local materials and climate. In this chapter you can learn the basics for being an informed customer when planning a riding arena.

The first point to remember is that what we call sand in fact consists of varying proportions of:

- sand (particles in the rock material $>63\mu\text{m}$)
- air
- water

The first question when selecting materials for a riding arena is:

WHAT TYPE OF ROCK (GEOLOGY)

Sand and gravel are granular materials resulting from the natural disintegration of rock or from rock crushed in an aggregates crushing plant. Rock can vary in hardness, depending on the mineral content, which produces sand with different properties. The type of sand that is available is therefore determined by the geology in a region, and will vary between, and within, even small regions. Therefore your location will determine some of the properties of the sand available if you source the sand locally. The hardness and shape of the sand you choose will influence the lifespan of an arena.

Commercial producers of riding arenas and consultants normally prefer a high percentage of quartz or silica. The access to silica (quartz) sands varies between regions. The selection of especially silica sand requires some vigilance regarding dust, as fine particles can damage the airways. This is primarily an issue in indoor environments. It is possible for a rock to be both hard and fragile, such as porphyry, and the resulting sand will have a shorter life span. If you buy a ready-made arena surface it is important to find out about the composition of the sand beforehand and make sure that it does not contain excessive fine materials and is sufficiently durable.



Photo: Elin Herlund

▲ Are you buying natural sand or crushed rock? To find the material that is best suited for your arena it is important to understand what affects the properties. The pictures show a glacial sand deposit being quarried.

Natural sand

The selection of natural sand will make a great difference for arena properties. Natural sand, was once rock, but has disintegrated to small particles and is deposited in nature. In continental Europe one important source of sands are glacial deposits from the Ice Age. The grains have been “ground” by water, typically giving a more rounded shape. One type of natural sand is sea sand, which some producers regard as having grains that are too rounded and too similar in grain size, resulting in an unwanted ball bearing effect. Sand grains with a more angulated shape will hold together better but with greater wear on the hoof/shoe. The use of additives such as fibre allows this more rounded material to be used.

⊕ **ADVANTAGES:** Natural sand has properties which are beneficial in riding surfaces, with rounded and slightly angular grains.

⊖ **DISADVANTAGES:** Natural sand is a finite resource. Glacial deposits of natural sand can be an important source of groundwater. Some countries, including Sweden, have an official policy for a long-term reduction of the use of natural sand and aim for a changeover to crushed rock. Common problems with natural sand surfaces are that the sand is installed too deep, or with a suboptimal distribution of grain sizes.

Crushed rock

The alternative to natural sand is crushed rock. This is produced when a quarry blasts bedrock into different sized rocks and particles and then crushes the resulting material. The bigger fractions are called road base because that is one of the main uses (example 2-6, 8-16, 16-32 and so on; road base are sometimes also known as aggregates). The relatively smaller fractions that is called well graded road base is used in many arena constructions as foundation layer. Sand is

the smaller particles with silt and clay sized particles as the finest fractions. The silt and clay are sometimes called fines, with clean sand having very little of the finer material. While the grains in natural sand are to various degrees rounded, having been polished by water over time, crushed materials usually have a much more angular shape. Just holding some grains in your hand you can feel they are “sharper”. These more angular materials “hold” together better than natural sand because the sharp edges of the sand grains will contact the adjoining sand particles. You can utilise this effect to get the surface to “hold” together, but the result can also be that such a surface gets hard due to fine particles generated from fracturing of the corners of the sand, that in turn cause high degree of compaction. These broken corners effectively change the particle size distribution which in

turn increases the surfaces ability to compact. An even distribution of different particle sizes compacts much more than a material that consists of the same sized particles. Crushed rock or manufactured sand is more angular producing good grip but it is likely to cause more wear on the horse’s shoes (or hooves if barefoot) due to the abrasiveness of the angular grains.

⊕ **ADVANTAGES:** Unlimited resource. New methods for crushing are being developed may make it possible to produce functionally designed gravel, sand and fines.

⊖ **DISADVANTAGES:** Less durable than natural sand. Sharper grain surfaces that increase wear on the hoof/shoe. Requires know-how to produce a surface that does not compact too much.

▼ Road base is often used in the deeper layers in an arena and is produced by crushing rocks.



Photo: Elin Herlund



WHAT DOES RESEARCH SAY?

With modern methods

of crushing rock you can achieve sand and fines with the required (rounded/subangular) surface structure. This is being produced in small amounts in an ongoing research project led by Chalmers University of Technology in Gothenburg, Sweden. The project aims to develop products that can replace natural sand and gravel, but also improved and specialized products.



CLICK AND READ MORE

[Chalmers Rock Processing Systems](#)



RUBRIK

Since 2002 there has been international standard classification

of natural sand based on grain size (ISO 14688-1 with further categories) but this describes those relevant in an arena top layer:

Gravel	2 to 63 mm
Sand	0.063 to 2 mm
Silt	0.002 to 0.063 mm
Clay	≤0.002 mm

Three important parameters used to assess sand and its properties are sand shape, size and sorting.

THE GRAIN SHAPE/ROUNDING

The shape or rounding of the grains particles is one of three critical factors in determining how the sand will function as a riding surface. This is somewhat an issue for the difference between natural sand versus manufactured. Natural sand will have rounded or subrounded grains, as over time the sharp angles have been subject to abrasion and impact with other particles, but the grain shape can vary significantly even in natural sand.

The tendency of more rounded sand grains to create a loose surface can, to some extent, be controlled by using a wider distribution of grain sizes and fractions. Some specialists suggest that “suitably” subangular or subrounded grains in natural sand produce a combination of dampening, cushioning and stability because they will not compact entirely.

In contrast, crushed rock materials have sharply angular grains when new.

HOW BIG ARE THE GRAINS?

The manner in which the size of the sand grains affects the performance properties of the arena is well accepted. Most people who have been involved in conversations about riding arenas have heard definitions such as “0-2 (4, 6 etc)” or “100 sieve sand” used when describing the sand used in an arena. The separation of sand by size is performed by putting the sand through screens. 0-6 describes the higher and lower end of the grain diameter in millimetres. This description does not, however, mean that the sizes are evenly distributed between those two limits. In some cases there may even be a small proportion of grains that are larger than the specified maximum size. In general the most important characteristic of arena sand is actually the size of the pores

between the sand. Smaller pores are created either by smaller sand particles or by larger particles mixed with smaller material that can fill the gap. The problem with the latter case however is that the material can sort out over time and become very hard, where smaller grains with a very consistent size will retain the energy absorbing characteristics which are so important in an arena surface.

The language associated with the sand can be confusing depending on the goal of the supplier and the type of material. A stable base is required when constructing roads or foundations for buildings. The material which is used for these applications is sometimes called well graded. This is a good material for a foundation for an arena but would not make a good top surface since it would compact and get hard, fine for house building but not good for horses. What these same suppliers would call a “poorly graded” soil both has better drainage and

will not get hard as easily. The goals for sports fields or agricultural applications are very different and have developed separate descriptive wording as well, where “poorly graded” materials can become “well sorted”. The critical characteristic of an arena surface is that the material in a basic sand arena cannot have all of the grains of sand all of the same size or the effect can be compared to that of peas “rolling” in a bag. This will provide the horse with poor grip. When fibre or wax and fibre are added to this same material however, the opportunity exists to have a well sorted material that in combination with the synthetic additive will support the hoof of the horse. This type of surface with open pores and rounded but durable sand will tend to have higher initial cost, but will require less maintenance and will have reduced sensitivity to moisture content because of the ability to drain water through the surface.

If a grain of sand had the same diameter as the wheel of a bike, a grain of silt would have the same diameter as a bottle cap and a grain of clay would be smaller than the head of a pin.



The diameter of a fairly large grain of sand is roughly equivalent to the head of a matchstick, while clay particles are so small they can not be seen with the naked eye.

◀ To produce wanted dimensions the quarry puts sand through one or several screens. Here such sorting is being done. The material is taken out and transported by a conveyor belt to a separate heap. In the background are heaps of crushed stone (grey material).

SPECIFIC SIZE

As we have said, the size distribution of sand is very important for function, and is, therefore, essential information when ordering sand for an arena. To get a description, you order a sieve analysis from the quarry (or discuss with the contractor/producer). For the analysis the sand is separated through screens with progressively finer mesh, rather like wheat flour when divided into fine flour or wholemeal. A quarry can also mix sands into a predetermined profile for the customer. This test, like many with natural materials, is deceptively simple. Caution should be exercised when looking results with a larger percentage of fine material, silt or clay. The silt and clay can in some cases be very difficult to separate and make sand grains appear larger, either by covering their surface or by forming agglomerates of clay particles. Other methods are needed for profiling these materials, which involve soaking and use of chemicals to dissociate the clay particles. The test methods used are critical and incorrect results can result in the construction of an arena which may only be acceptable for a short period after installation.



FINDING SAND
The easiest way to locate a quarry or sandpit will differ

between countries. In some countries the National Geological Institute will publish maps of local geology and access to sand. One solution is also to use the web engine Google Earth. Locate your local area with the satellite image, and write "sand" in the search box. This should produce a list of quarry companies with contact details, in your region.

MORE ON SAND AND FACTORS THAT INFLUENCE THE MATERIAL

How big is the natural fraction of fine materials such as silt and clay?

The smallest grain size which will be specified in a sieve analysis of natural sand is normally at 0.063 mm in diameter. It is important to also know how much of the material is smaller than that. The smallest grains are not sand but particles of clay, silt and various biological sediments from nature (humus). This can be classified as “filler” or “fines”. That is also the name for the finest particles in crushed materials.

In fact there are other critical characteristics of the smaller particles that are more important than the size. In general it is best to refer to the small particles identified in standard size testing (sieve and hydrometer) as clay sized particles, since the actual minerals and flat shape of some clay result in a dramatically different behaviour than what would be expected from simply smaller sand type particles. Therefore what we call arena sand can include materials which range in size from even fine gravel down as small as to include tiny clay sized particles.

These clay sized particles can have both advantages and disadvantages for arena properties, as mentioned earlier. There are different opinions on how big this fraction should be. Some expert consultants have a

guideline percentage of about 2-4% percent of filler. Some commercial producers recommend the use of fine sand with some 15% of clay/sediment particles, which will increase the tendency to compact. Crushed materials also have a proportion of “filler” consisting of particles less than 0,063 mm in diameter. One aspect of the finest particles is that, over time, they can cause clogging/blockage of the arena drainage.



[CLICK AND READ MORE](#)


To find out more about how clay affects the properties of a surface follow the link and open the document “The role of clay in racing surfaces”. This is an article written by American surface researchers who are part of the review group for this document.

What is “washed sand”?

This is sand in which the smallest particles have been washed away. Washed sand is very useful if, and when, anyone wants a specified grain size to be included in a surface, or to add to an existing one. The disadvantage, mentioned earlier is that washed sand is used on its own, when the smallest particles are missing and all grains are about the same size, the surface will provide less grip/traction. Crushed material can also be washed.

SIEVE ANALYSIS


Material passed

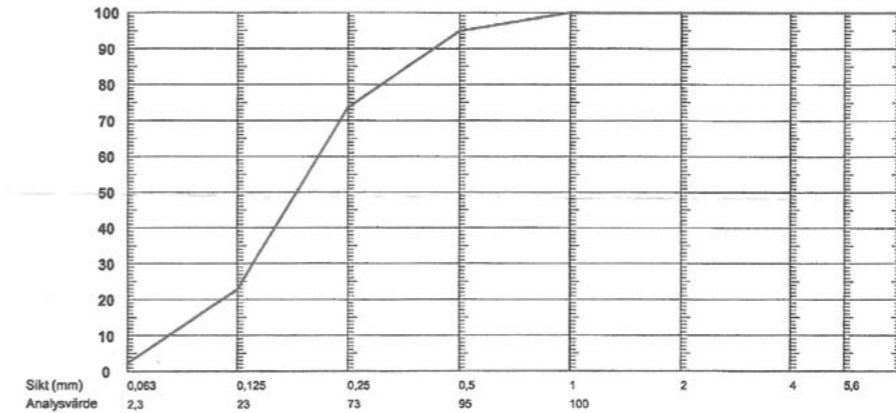

◀ Sieve analysis chart: The graph shows a sieve analysis from a quarry with sand at a sorting of 0-1. Each vertical line represents the size of the “net” in the sieve where the sand has passed through. The y-(horizontal) axis shows which proportion (percentage) of the sample that has passed through. This shows a stepwise distribution of the sample material. It is very important that the sample analysed reflects the whole batch of sand you order.

SIEVE ANALYSIS

Material passed

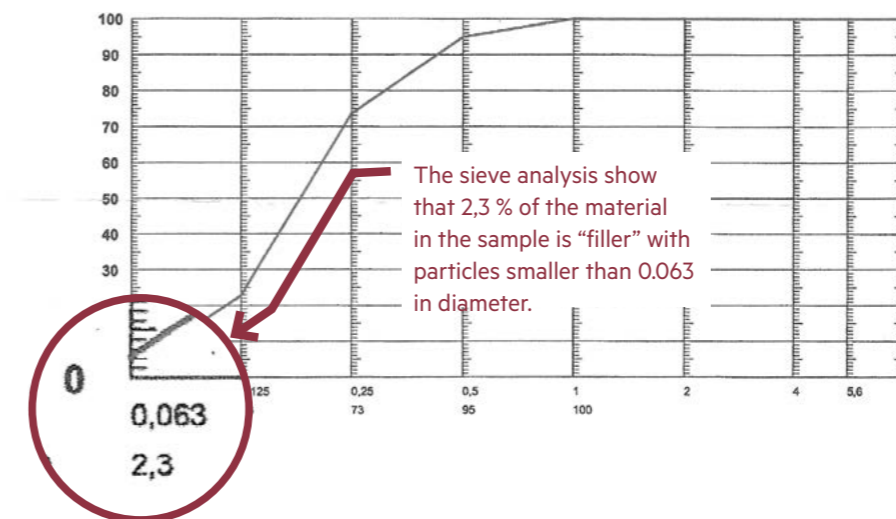

◀ The same sieve analysis but additionally showing the proportion of filler. A standard sieve analysis chart starts at 0.063 mm, which is the size of the finest mesh in the sieve. The chart will therefore not start at 0, as a percentage of the sample is smaller than that classification. This portion is called filler. This is silt and clay and very important for the sand and surface properties.

80 percent of equestrian establishments in Sweden have insufficient water supplies for correct watering of arenas.

Lars Bergström



Water

Water is the single most important factor that influences the properties you want from an arena. Water is also discussed in the chapters on Construction and Maintenance. Moisture to a high degree determines the properties of the sand, and therefore also of the arena. A good example is a beach by the sea. Compare walking or running at the edge of the water, where the sand is even and saturated by water from the waves, or away from the edge where the sand is dry and often deep. If the water content is too high the sand will start “floating” and the surface will again be too loose.

A good supply of water and a good watering system are, therefore, very important to consider when installing an arena. If the stable/establishment has a limited water supply there are alternative solutions:

- Buy water in a tank.
- Organise collection of surface water, for example, rain water. (in some countries this can be subject to laws and regulations)
- Consider a waxed sand surface, which requires less added moisture.
- Subsurface watering also called “Ebb and Flood” systems save water by adding the water under the arena surface and thus reducing evaporation.

One solution for riding surfaces that has been developed in continental Europe where water is the main ingredient is the Ebb and Flood system. The top layer consists of sand only or with a proportion of fibre, that is kept moist from beneath. Arena surface properties are controlled by the moisture level, and with the right construction the whole arena will maintain a consistent degree of moisture. The system requires specialist know-how to install, including careful selection of the sand. The so-called “flow point” varies between different types of sand, and is especially important when the sand is kept thoroughly moist as in this system.



ADDITIVES

Worldwide there is great variation of different materials used in surfaces for equestrian sport, mainly mixed with sand, but also as the sole material. In the following we will discuss a couple of materials more commonly used in mixtures with sand. Remember that with the correct maintenance (control of moisture content and mechanical interaction) different materials could be used to achieve the desired properties of an arena. In a global perspective we also have very different prerequisites concerning environmental factors such as rain, humidity, temperature and wind, which could substantially influence how different materials behave.

Fibre and textile

Fibre and textile have been used in riding surfaces for more than 20 years, with the aim of improving functional properties, increasing shear strength and stability and reducing maintenance requirements. The effect of adding fibre to sand based sport surfaces is well established in the scientific literature but the effect on the sports horse is not well documented. Suggestions below are therefore based on the practical experience of international arena consultants.

The effect of textile fibre is explained in terms of increasing the binding between

sand particles. The sand particles dig into the surface of the fibre creating a surface is somewhat like sand paper, which resist the sliding of the neighbouring particles and thus will increase grip and friction. The market for equestrian surface fibre is not standardized, and thus it is important to specify materials in a manner, which ensures that the surface gives the desired characteristics.

Like sand, there are great variations between the materials and shapes of the textile additives for arenas. Some vendors provide shredded carpet for this application, with others having a similar product which is cut and with the backing material removed. Single fibres and yarns are also used with both new and recycled materials used for the fibre for riding arenas. In general, longer fibres are used in smaller quantities, but can be more difficult to distribute and make maintenance more difficult. Small rectangles of material can also be used which also require less material. The shorter single fibres or yarns are typically easier to maintain but requiring larger quantities. Both the stiffness of the fibre and the strength also affect the quantity and durability of these additives. The pricing also varies greatly, from 0.20-0.30 euros to 1.50 euro per kilo (in continental Europe).



▼ Fibre and textile can be an ingredient in the top layer.



I think it is time to emphasise the quality and potential health risks of fibre materials.

Since recycling and the usage of recycled materials increased, it is harder for manufacturer to source harmless and pure materials and we find more fibre products with a content of hazardous or harmful ingredients, starting from glass fibre like fibres which can get stuck in lungs for some time and cause persistent coughs and inflammation of lung tissues. The dust of "dirty" carpet recycling and other materials treated with chemicals of all kinds can cause severe health issues. I always point out the clients should force manufacturer and supplier to provide a safety data sheet which shall be clearly stating the classification of the material in terms of health and well being of horses and rider but the environment as well. By having providing this data sheet, the manufacturer becomes liable and probably will make sure that your material is pure and safe.

Unfortunately not so many supplier have this data sheet but it is always worth to ask for it and take it into account for your evaluation.

Oliver Hoberg

Three important criteria to consider when ordering fibre or a fibre mix:

- **IS THE TEXTILE/FIBRE CLEAN?** Rubber or glue backing material (in recycled carpet) can be present, and some people question the environmental effects.
- **SIZE?** Textile and fibre are sold both as pieces and as fibres or yarns. Pieces of textile bigger than 3x3 cm, or 3 cm long for a fibre thread, make the surface more difficult to maintain.
- **SENSITIVE TO ULTRA-VIOLET LIGHT?** If a material is not resistant to ultra-violet light from the sun, there will be rapid degradation with dust formation, which will shorten the lifespan of the arena.

Proportion of textile and fibre

The proportion of fibre can be measured as kilos per ton of sand or per square metre. The quantity of fibre is dependent on the type of fibre and the shape. In addition the shape of the sand will also have an influence on the effect of the fibre on the final surface material.

The advice given here is again based on practical experience, and effects have not been mechanically tested.

Guidelines:

- **LOW PROPORTION OF FIBRE** (suitable, for example, for riding schools and other users that do not wish for a high degree of grip/friction but want to take advantage of other effects of fibre: 10 kilo per ton of sand or 2-2.5 kilo per square metre of sand (see advice on choosing sand below).
- **HIGHER PROPORTION OF FIBRE** (for example, for competitions with better grip for higher speeds): 12-16 kilo per ton sand or 3 kilo (range 2.5-3.5 kilo) per square metre.

An even higher proportion of fibres, such as 4.5-7 kilo per square metre of sand or 40-45 kilo per ton of sand, produces a very high degree of grip with correspondingly increased load on the leg and is rarely used for riding arenas.

Choice of sand for fibre surfaces

INDOOR: Fibre is best suited for mixing with fine sand at diameters of 0-1/0-2. The fine sand adheres better to the fibre compared to coarser sands. Another recommendation for sand used with fibre is to have a low proportion of filler (maximum about 5 %). The sand used by commercial producers of fibre sand arena surfaces at an international level is typically very clean with little or no silt and clay and with a very high proportion of silica. Silica sand is an example of a durable (and more expensive) sand. Durability means that the sand is not being crushed by the wear from the hooves. If the sand grains are getting crushed relatively more fines will be produced, which could lead to decreased vertical drainage capacity.

OUTDOOR: If the fibre sand arena is installed in an outdoor location it may be required to withstand heavy rain. Coarser sand can then be used, and there should be almost no fine material in the surface to maintain horizontal drainage. Often in an outdoor arena a slope is also used so that in the case of very heavy rain both vertical and horizontal drainage will occur.

Installation and maintenance of fibre surfaces

For a fibre sand mixture to function correctly it is important that the sand and fibre are mixed and properly watered. Mixing can be done at a factory or done with a rotavator/rotary tiller at the installation. If the sand is allowed to dry out, the fibres can accumulate on the top surface during maintenance or in dry conditions without watering. Remixing of the material must then be done carefully, especially if the material has moved, to avoid damaging the foundation material.

A fibre sand mixture requires considerations about final disposal at the end of the useful life. A well maintained fibre sand arena can last for 20 years, but will be classed as waste when it is time to replace it, and this can be costly. Methods to shift the sand and fibre for recycling do exist and are also being developed.

If someone wants an arena installed but says they cannot install a sprinkler system for watering, I say no to the whole order. When they ask why, I explain that I don't want them to come back after a few weeks complaining that the surface is too deep, when the reason is it is too dry.

Karsten Koch



WHAT DOES RESEARCH SAY? A scientific study published in 2013

by the equestrian surfaces group at SLU about surface use, training and injury in jumping horses indicated an association between use of sand-wood surfaces and less risk of days lost to training due to injury." The article is also mentioned in the training chapter "Training for soundness and performance".

WOOD (CHIPS/SAWDUST)

Woodchips, sawdust or other biologically degradable material is a main ingredient in many surface mixtures around the world. Woodchip only surfaces are seen occasionally but not discussed here, although some aspects such as degradation are relevant in both cases.

+ ADVANTAGES: Renewable resources. Easy to dispose of at end of use, due to the non-synthetic contents. The wood aids responsiveness/elasticity, and helps the sand to be stabilised, but it is important to combine it with the right type of sand. A surface containing wood has a shorter "lifespan" than fibre sand, but is substantially cheaper to install and serves as an alternative that with good maintenance will function well also for competition (though not the highest levels) and training.

- DISADVANTAGES: Naturally bio-degradeable, can then get slippery and needs top-ups/replacement, resulting in shorter intervals for end of use or renovation. With removal of manure the risk of slipping and lack of grip are reduced.

Like sand, different types of wood have different properties. This will influence the lifespan of the riding surface, as different woods will degrade slower or faster. One guideline for sand-wood surfaces is that the top layer will need replacing every three to five years.

Oak, for example, will last longer than pine, and pine will last longer than fir. This is due to the trees' strategies to resist attacks from fungus, but also provides resistance against mechanical wear from hooves. Sawdust from pine has been easy to source in Sweden. As it degrades quite quickly there has been a tradition to do "top-ups" every year. Meanwhile the remains of the old wood are still there, and in combination with old manure in arenas that are not mucked out, this can result in a slippery surface from the degraded organic material. However, as is pointed out elsewhere, if the arena is mixed deeply through deep harrowing and air is introduced into the surface then this problem is avoidable.

Examples of more durable woods are larch and oak. Based on experience woodchips that are the size of match sticks work particularly

well but this is not a standard order. The ease of disposal of wood sand mixtures is an advantage of these types of arenas, since it can then (with permission) be put out on farmland for disposal unlike the sand fibre surfaces.

Choice of sand for wood mixtures

The sand that is mixed with wood should preferably be fine natural sand, at 0-1 mm. You can choose 0-2 mm, but then the proportion of 1-2 mm should be no more than 10 percent. The proportion of filler should be low, maximum 5 percent. The proportion of wood in the whole mixture should be about 30 percent.

WAX

Wax-coated sands are used more commonly in some countries and are typically seen when particular performance characteristics are desired. These surfaces also provide reliable vertical drainage.

+ ADVANTAGES: A choice that requires less watering than others. A good alternative for anyone looking for strong cohesion and friction in the top layer without lots of filler particles that can compact into a crust deeper down or clog drainage. An outdoor arena with wax-coated sand can absorb a lot of rain if the drainage is correctly installed. Maintenance can be less intense than for other surfaces.

- DISADVANTAGES: The material can be difficult to dispose of at end of use. Waxed surfaces can also be more sensitive to changes in temperature, getting harder in cold weather and very soft/loose when warm (which can be addressed with maintenance). Like fibre, waxed surfaces are included in the discussion on increased friction on the hoof. The wax can wear away from the sand over time and the sand may need "rewaxing", which can be costly. Footings can have a long lasting smell which can be annoying in hot conditions and indoor arenas. Some sensible people reported that they have a tendency to get headache because of the smell. You better check on reference objects if the used wax has a smell and if you can bear it over time.



WAX AND TEMPERATURE

Wax coated sand is one option for arenas, that, for example, is less sensitive to moisture. At the same time wax arenas have been shown to be affected by temperature. Here you can read a publication by Professor Mick Peterson about waxed sand properties on racetracks, related to temperature.



[CLICK AND READ MORE](#)

”Manure kills all riding surfaces, irrespective of the material.”

Oliver Hoberg



OTHER MATERIALS

Apart from wood, fibre and wax other materials have also been used as additives in riding arena across the world. In many cases it is recycled materials, most often rubber, often from recycled car tyres. Rubber has also been tested beneath the top layer. In Germany recycled products, such as polyethylene, are

used in sand mixtures. In the past recycled, shredded cable has been used but is no longer allowed in many parts of Europe, due to risk of environmental contamination from metal residues and wood chip mixtures is probably the most reasonable and environmentally preferred footing solution. Having in mind that after three years the footing consists of about

50% manure and the performance is not given any more, the disposal of that type of footing is easy and not costly. The all over costs for regular replacements can be calculated easily and budgeted as annual write off. An annual write off for artificial footings will be significantly higher and since environmental rules and restrictions may increase the costs for disposal in comparatively short intervals, I hardly recommend artificial footings if permanent removal of manure is not possible.

UNWANTED MATERIAL – MANURE

Horse manure collects more quickly on an arena than most people realise, and becomes an ingredient in itself with a negative effect on properties. In a sand-wood mixture the manure will mix with the wood into a compost-like organic material. When sand-wood arenas are said to be slippery the reason is often a layer

of manure below the top surface. In a wax-coated sand arena manure and urine will alter the behaviour of the wax, and in fibre-sand mixtures manure also shortens the length of use. If a stable, or establishment, finds daily mucking out of the arena difficult to arrange, the suggested solution is to replace the whole top layer perhaps as often as every three years.

Remember that outdoors other organic material such as leaves can also have unwanted effects. If left on the arena they will degrade and change the composition of the surface.



MANURE ARITHMETICS

If every horse produces manure once during each session in the arena the manure will have a volume of about 2 litres. With 50 horses a day using the arena and no mucking out this will mean 100 liters of manure daily being mixed into the surface. After three years 50% of the top layer will represent manure.

Oliver Hoberg

IN DEPTH

In some countries including, for example, Sweden natural sand is rated as not a renewable resource. There are therefore government policies to reduce demand, for example, through higher tax on natural sand compared to crushed rock. See also link about Swedish research on alternatives to natural sand.



[CLICK AND READ MORE](#)
Chalmers Rock Processing Systems

6 Budget

A good arena, which has been correctly built and is correctly maintained, can last a long time.



THE CHAPTER IN BRIEF

Costs are the first point to consider before constructing a riding arena. It is very important to produce a thoroughly analysed budget before commencing. Anyone planning a riding arena should take into account:

- **PERSONAL RESOURCES AND LOCAL CONDITIONS**
(private or business finances, ability to do own work, climate, local soil, resources for maintenance etc.)
- **THE INTENSITY AND TYPE OF USE OF THE ARENA**
(type of stable/equestrian centre, competitions/training only, discipline, number of horses etc.)
- **OTHER COSTS**
(staff or own time for maintenance, machinery and other equipment, longevity of the arena etc.)

PERSONAL RESOURCES AND LOCAL CONDITIONS

When considering installing a riding arena it is very important to begin by analysing and taking advice on whether you have the skills, time and equipment to do all, or part, of the work yourself. What would be the costs and effort involved if you “Do It Yourself” (DIY), or hire a local entrepreneur, or a commercial surface specialist who installs an arena ready for use? The answers will vary between countries and within the same country.

Do you maybe have your sight set on a choice of material which, for whatever reason seems unrealistic? There might be a solution that means you can still achieve the properties you want, within your budget, if you can do some DIY work. Advice is included in the Materials chapter.

One important step is to invite tenders for materials and the construction work, review the tenders and get references from other customers on the end result and function. This concerns the arena properties, so that your goals for functionality are met. (The tender process and alternatives for construction are described in [more detail in Chapter 8 “Construction principles”](#)).

THE INTENSITY AND TYPE OF USE OF THE ARENA

How do you choose an arena surface? It is important to consider the main use of the arena, the number of horses that will use it daily, whether it will be used for competitions/shows and whether you have access to other areas for riding, such as fields or riding paths.

Weigh your needs for an outdoor versus indoor

arena. Is it important that the surface has an “all weather” capability? What part of the year do you need it most? The choice of materials and construction should be strongly influenced by how the arena is expected to function in different weather and temperatures. **The heart of the matter is what properties the arena will have, and the goal for those characteristics must be defined from the start!**

OTHER COSTS

It is important to remember that the final cost of an arena is not only determined by materials and the construction, but also maintenance, including work time and equipment/machinery, renovations, expected “lifetime” or length of use, and (depending on country) final disposal. No arena will meet expectations without correct maintenance and the “lifetime” will be shorter without appropriate maintenance (see the chapter on Maintenance).

The length of use (with acceptable function) of a riding surface can vary from three to 20 years depending on choice of materials, wear and maintenance.

In some countries, for example the EU, a riding surface may be classified as a waste. The fees for final disposal of high volumes of waste should to be taken into account in the total budget. When such fees exist, great cost differences can occur. Disposal of natural materials such as a sand-wood mix, (that can be applied to agricultural land) can be relatively cost-effective. Surface mixes containing synthetic materials such as fibre and wax may require more complex waste disposal and incur higher costs.



7 Environment and sustainability

It is important to evaluate how the arena material might affect the environment. This concerns both surface water drainage and end of use disposal. Start by contacting your local council to find out about the regulations that are relevant to you and your arena surface.

THE CHAPTER IN BRIEF

Environmental rules and considerations for riding arenas vary greatly between countries and even between local municipalities, from none to very detailed. The decision to analyse the environmental impact and sustainability aspects of an arena can be a personal choice or official requirement, to include energy use, potential climate impact, and local conditions regarding potential environmental contamination and method of disposal.

When installing a riding arena it is therefore important to be informed about and adapt to local laws and regulations. This is irrespective of what materials are used and how the arena is built.

To prepare for any official permits it is important to organise a written description of the surface composition with any materials listed. Use of certain surface materials such as rubber are restricted in some countries due to potential contamination. Water use and drainage can also be subject to local or national rules.

Longevity of an arena surface can vary and is often dependent on its makeup, location (particularly indoor or outdoor) and maintenance. Arenas with high organic content (i.e. woodchip) will breakdown (particularly outdoors) much faster than an equivalent sand or sand/fibre surface. At the point of installation, consider potential routes of disposal. The most environmentally optimal “disposal” route for an equestrian surface is re-use and/or renovation.

Renovation may involve the addition of extra sand and/or fibre along with the re-laying of the surface. When selecting a surface type, check that renovation is a realistic option ([see chapter 11 ”Maintenance and renovations”](#)).

For a surface to be re-used in another form (i.e. non-equestrian), the individual constituents require consideration. For example, wax and fibre components may restrict its re-use as a soil improver or top-dressing in agricultural land. Similarly, sand (with additional fibre) would potentially not be suitable for use in building and construction; it may however find a use in road aggregates.

Complete disposal to landfill should be deemed a last resort. In countries where a cost per ton is incurred for landfill disposal, this route will be expensive. Some reduction in landfill costs can be achieved if the waste is deemed to be inert (see [wastes acceptance link](#) below for further information).

Different countries and regions will have different regulations. We are showing some UK examples that will to some extent also apply to other E.U. countries:



[CLICK AND READ MORE](#)
[\(scientific White Paper\)](#)



[CLICK AND READ MORE](#)
[UK Wastes acceptance guidance.](#)

A large wheel loader is shown in the foreground, spreading a layer of light-colored material (likely gravel or crushed stone) onto a dark asphalt surface. The loader is viewed from a rear-quarter perspective. In the background, there is a blue tractor and a red machine, possibly a conveyor or hopper, under an overcast sky. A line of wooden posts is visible in the distance.


8 Construction principles

The base of the arena is very important in relation to how the arena will function. If the base is well constructed from the start it will make a big difference as to how long the arena will last.

THE CHAPTER IN BRIEF

The base of the arena is very important for how the arena will function. If the base is well constructed this will make a big difference for how long the arena will last. If, for example, the drainage is not working it makes little difference how carefully the top layer has been selected. A very important part of preparations is to analyse the local soil and other aspects of the land used.

The fact that clay and sandy soils are different to ride on is a common experience. To protect from and compensate for variations in the ground, it is necessary to start by constructing a base. At a small establishment with few horses on sandy ground it might be possible to install an arena without the base described here, but in most cases the base is of vital importance for arena function.

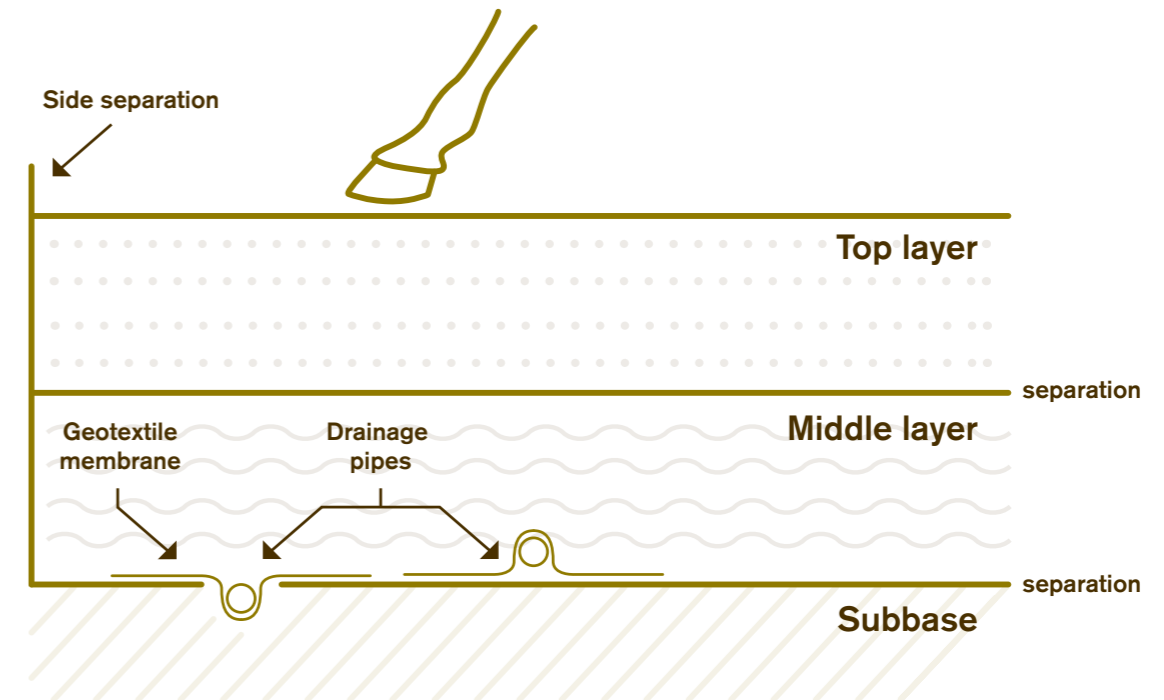

PRINCIPLES OF ARENA CONSTRUCTION

An arena always has a base and a top layer. Depending on the composition of the top, the design of the arena and base layer there can be a middle layer. Most permanent arenas have a middle layer. For a grass arena or if the arena is watered using a subsurface system (for example, Ebb and Flood) then certain other construction principles apply for which more specialised design work is required.

Drawing: Elin Hernlund, Lars Roepstorff and Linda Eriksson

BASE LAYER AND DRAINAGE

With few exceptions, an arena has a foundation over the underlying soil, called base layer.

The purpose of the foundation is to provide a stable base for the arena. It should be sufficiently durable to remain uniform during use and maintenance of the surface. Depending on the design the base (or possibly the sub base at some times) can also contribute to dampening of the surface, which is generally considered to be desirable. The surface should resist damage with particular consideration for areas such as jump landing and where maintenance equipment comes into contact with the surface.

In addition to providing a base for the footing, the foundation also is critical to maintaining the proper moisture content in the surface. The principles vary depending on local climate conditions:

In dry climates/areas (also indoors) where drainage is not an issue clay or other materials that retain water can be used to keep a surface from drying quickly.

In wetter areas one purpose of the base layer is to promote drainage, provided the general construction principle is drainage through the arena as opposed to surface drainage. When an arena should be able to drain water vertically the base is responsible for quickly moving water into and out of the surface. Materials used for this purpose in the base layer include well graded road base, limestone and lava stone.

Therefore it is important that not only the

design of the surface be considered when choosing the foundation, but it is also important to choose a foundation material which is appropriate for the local climate.

SEPARATIONS

Typically the top layers of the surface and the foundation are constructed so that they resist mixing over time. Blending can be caused by water saturation from rain draining through the layers, improper maintenance or loading from the traffic of horses over the material that causes a shift in the cushion. One common solution to keep the layers separated is by using a geotextile membrane. The geotextile membrane is designed to let water through but not sand grains. Depending on the mesh size anything from lay to coarse sand can be blocked from passing through the layer. Separation of the materials is important, especially between the base and the layer above to ensure that coarse material which can injure the horse is kept out of the cushion and to keep the finer material from the cushion from blocking the drainage system. However, the use of a geotextile membrane can present problems from two perspectives. Over time geotextiles will become clogged especially when the cushion layer has significant amounts of clay. The fine particles are washed down through the layers, so that the membrane loses its permeability and the arena then loses its ability to drain. If a shallow sand surface is used over the geotextile, perhaps 10 cm with a geotextile over the

foundation, there is a risk that the geotextile will get torn and can be pulled up even in normal use if the maintenance is not done in a way that keeps an even thickness of the top layer. The quality of geotextile is measured in thickness, and described as weight per square metre as well as by construction type and size of openings. It is typical to use at least a class 2 for a riding arena.

When a geotextile is not used it is also possible to build a separation from the foundation using a succession of smaller sand particles towards the top, for example, starting with 8-16 mm road base and finishing with 2-6 mm. Such a construction works because the finer particles filter through and are washed out with the drainage. For this to work the load from the horses must not create so much movement that the materials will be blended through a mechanical effect. This requires a relatively stable layer on top of the separation to prevent it mixing with the underlying material.

It is also possible to build an arena without a separation layer. These types of surfaces typically drain water from the top and not through the layers. This requires a convex top (camber) for the water to pour away. The primary concern is that proper maintenance must be done to ensure that the foundation materials are not mixed with the top layer. Like the other designs caution must be exercised in maintenance to both ensure a consistent footing and to keep from mixing the materials or damaging the foundation.

MIDDLE LAYER

The function of the middle layer is to have a bearing/stabilising and levelling effect, and preferably to provide good dampening of the maximum load from the horse. Such responsiveness or elasticity in the middle layer can be achieved in different ways, for example, by the use of coarse sand, controlled moisture in sand mixtures or elastic materials such as rubber or synthetic plastics. Over the next few years we expect to see developments and improvements in the construction and maintenance of this layer.

Some examples of construction of a middle layer:

- Road base (for example, 8-16), the thickness of the layer should be at least 3.5 times the greatest diameter of the particles.
- Shredded rubber (tyres), with a maximal diameter of 15 cm. It is important to consider environmental aspects of recycled rubber, and be aware that the rubber layer and the layers above it can tend to become unlevel. This can be controlled with careful maintenance.
- Mats of elastic material such as synthetic polymers.
- Lavastones.
- Crushed rock (stone dust), up to 15 cm deep. Stone dust can get compacted and become very hard, depending on the distribution of the size of particles.



Imagine a recipe in a cookery book. The same recipe will produce different results on the plate, depending on the quality of the ingredients used and the skill and experience of the chef. The same is true for riding arenas.

◀ If the top layer is planned to be thin, for example, less than 10 centimetres, this requires extra care at the installation and should in general be done with the aid of laser measurements.

There are several other solutions for a middle layer that can work, but it is important to consider function and whether you can handle watering, drainage in outdoor arenas and access to water both indoors and outdoors when needed. Commercial products are marketed for use in middle layers, including mats of rubber or polymers that can provide cushioning and water control.

TOP/SURFACE LAYER

The top layer should provide the horse with an even and stable surface on which to work. The surface should allow the hoof a certain amount of glide at touchdown ([Read more in chapter 3 "The interaction between the hoof and the surface"](#)) but still provide enough grip to maintain the confidence of the horse and rider. The top layer should reduce the shock at impact and the material should move just enough so that it can “gather” under the hoof when the horse moves on a circle, and thereby provide support to the whole hoof when the horse “angles” through a turn.

A range of materials are used as the top layer, but in general the main ingredient is sand. This can be mixed with organic materials such as woodchips or sawdust, or synthetic materials such as fibre, rubber or wax ([see also Chapter 5 "Construction materials"](#)).

Some construction examples:

The thickness of the top surface is not only determined by the demands of use but also by the existence of a middle layer. However in general the top layers are about 10 to 15 cm thick.

- Fibre-sand mixtures are often installed with a thickness of 10-15 cm.
- Sand-wood mixtures are often installed with a thickness of 10-15 cm, or thicker, obviously also dependent on whether there is a middle layer and what is beneath that.
- Waxed sand is often installed at a thickness of 10-12 cm.

When choosing the top layer, consider:

- What is the arena being used for?
- What maintenance is required?
- What is the local climate?
- Is the arena indoors or outdoors?
- What is the budget?

([Read more in Chapter 5 "Construction materials"](#))



REMEMBER

Sand-wood mixtures often require being put down in stages, so that the material has time to settle, otherwise it can become too deep.

WATER CONTROL/DRAINAGE

Water control is important both to help keep the material moist and to allow drainage. Bad drainage will result in the surface being inconsistent for the horse to move on. A fast draining arena which is made of fibre sand or waxed sand will drain sufficiently well that the surface is effectively unaffected by water. Whatever the alternative, natural surface drainage or subsurface drainage pipes, the control of water in the surface is at least as important as the choice of material.

With deep drainage it is preferable to plan ahead for how the pipes can be cleaned, if and when they get blocked. This will be simplified if the pipes are placed in parallel with the length of the arena, with an access hole and pipes at ground level. This prevents being forced to dig up the pipes for cleaning at a later date. Placing the pipes in a zigzag pattern makes cleaning more difficult.

If natural drainage is used and the soil conditions are suitable, the ground must be even with some cross slope, typically 1% (FEI limit) to minimise washing effects and max 2% with the disadvantage of footing displacement/washing in rainy conditions. Rider may complain about uphill/downhill effects for the horses. Dry and loose clay produces huge amounts of fine dust which flies high up into the air. In some case the arena is designed with a camber (=highest in the middle, sloping to the sides) to achieve drainage. The design of an arena with a camber introduces the risk that the cushion depth will vary significantly through routine maintenance. This is because the harrow will tend to grade away the ridge of surface material in the middle. The possible thinning layer of surface material can cause changes in functional properties as well as blending of surface material and underlying layer material. This is less of an issue for an area with a simple cross fall across the surface, although attention must always be paid to the development of shallow areas.

It is possible to build systems where water from rain or daily usage is collected and can be recycled to return moisture to the arena. One solution for water control is the increasingly popular

subsurface watering systems sometimes called “Ebb and Flood” system in which an arena consisting of sand or sand-fibre mixes basically lies over a pool of water. There are drainage pipes, in the bottom of the pool of water under the arena, that allow both removal and addition of water depending on whether you want to remove excess rain water or add water under dry conditions.

IN DEPTH

Why do clay and sandy soils work differently as riding surfaces? Clay has different forces than sand that hold the particles together. When soils with a significant quantity of clay is compacted with water and then allowed to dry out the particles will become very dense and hard and can even be difficult to break apart. When the moisture content is high and water fills the pores between the sand and clay particles, the surface can become very slick. Because of the unique properties of clay, in drier climates even a small amount of clay is critical to ensure that the surface remains lively and supportive for the horse. It still needs water control though.

Sand on the other hand, when dry, is only held together by the friction between particles. Depending on the specific size and type of sand, the water will be held within the pores when it gets moist. As water fills the spaces between the sand grains, forces of attraction exist between the mineral surfaces and the water which can bind the sand together. There is a minimum amount of water required to sufficiently fill the pores to hold the sand together, however if the particles are completely surrounded by water the space between the grains is lost and the water has the effect of a lubricant producing a deep and unresponsive surface. This balancing of water content is familiar to many beach goers who have experienced the sand both next to the water and in the dry sand farther from the water on the dry dunes. However, in between is a hard sandy stretch with an appropriate amount of water to support someone walking along the beach with less effort.



ARENA BUILDING SUGGESTIONS FOR THOSE SCRATCHING THEIR HEAD

- Contact stables/equestrian centres in the area and ask if you can visit them. Ask for all possible information about how the arena functions, the construction and the contractor. Visit more than one establishment and compare the function with your own needs. Remember that natural sand is a finite resource, and that certain sand from a certain quarry may run out next month or next year. Also the properties of sand can vary within the same quarry. Knowing the typical design in your area is critical since the design has been adapted to local materials and is able to handle the local climate.
- If a certain arena seems worth copying, ask to be allowed to take samples from the top layer. Take at least 1000 grams from different parts of the arena, and order to carry out a sieve analysis.
- Use the result for a specification of your own order. Ask for tenders from quarries.
- Include details on transportation costs in the tender process. Transporting sand and other materials can be the costliest part of a sand order.
- Take samples of the delivered sand on arrival (again at least 1000 grams, from different parts of the delivery), to check that you received the product that was ordered.

Do not order sand without first determining a sieve profile (read more in Chapter 5 "Sieve analysis"). If your nearest quarry cannot deliver sand with the sieve profile you want, contact other contractors.

THREE EXAMPLES AND SUGGESTIONS

This guide clearly shows that it is impossible to produce a single universal recipe for an indoor or outdoor arena. How a riding arena will function is dependent on a number of circumstances, with the experience and skill of the person installing the arena being one deciding factor, together with the materials used and later maintenance. Due to geology, countries and regions within different countries vary in access to different types of sand. The selection of sand for an arena requires experience in evaluating sand samples that is too detailed to be covered in a guide of this format.

As a starting point for planning and selection three arena consultants list examples of different solutions, based on differences in needs and budgets. It is however not possible to give a complete set of instructions, as a specialist makes selections of sand based on experience and a comprehensive view of the arena. It is absolutely vital that the reader understands that the guidelines for sand and crushed rock given here are NOT sufficient to achieve guaranteed properties. The sorting, grain shape, grain mineral and fractions of silt and clay are aspects that help determine the function of the arena. If you, as a customer, have limited experience of sand and such evaluations it is important to enlist the aid of specialists with experience of sands and arenas. [Read more in Chapter 5 "Construction materials"](#).

A. Outdoor arena for a limited budget

ADVANTAGES AND DISADVANTAGES: Simple solution for a limited budget, on land and soil with natural drainage. Plan to water the arena so it does not get too hard, and careful maintenance so that the top layer stays even and level. This type of arena will probably have limited dampening/responsiveness and therefore not the first choice for jump training or competition at higher levels.

1. Base layer: level the soil, with some cambering (should be 0.7-1 % if no other drainage)
2. Separation: Use geotextile (minimum class 2). Purpose: prevents stones from the soil beneath "wandering" up into the top layer
3. Middle layer 1: 5 cm of road base 8-16
4. Middle layer 2: 2 cm of road base 4-8
5. Middle layer separation: 12 cm of crushed material 0-6
6. Top layer 8-10 centimetres, mixture of 50 percent natural sand 0-6 and 50 percent crushed material 0-6. At installation start by putting down a layer of 3-4 cm, let it settle and add as needed.

DESIGNER: LARS BERGSTRÖM, SWEDEN



B. Outdoor/indoor at slightly higher cost

ADVANTAGES AND DISADVANTAGES: More thorough solution but more expensive. Needs planned watering to avoid getting too hard, and careful maintenance so that the top layer stays even and level.

1. Base layer with drainage and separation (geotextile minimum class 2)
 2. Middle layer 1: 12-14 cm of coarse road base 16-32
 3. Middle layer 2: 2 cm of fine road base 4-8
 4. Middle layer separation: 12 cm of crushed material 0-6
 5. Top layer outdoor arena 8-10 cm, mixture of 50 percent natural sand 0-6 and 50 percent crushed material 0-6. Top layer indoor 8-10 cm of sand 0-2.
- At installation start by putting down a layer of 3-4 cm, let it settle and add as needed.

DESIGNER: LARS BERGSTRÖM, SWEDEN

C. Sand-fibre indoor arena and in green for outdoor

ADVANTAGES AND DISADVANTAGES: Arena that works for training and competition at higher levels with higher loads on the horse. Sand-fibre mixes are, in general, costly but have, with correct maintenance, the longest lifespan.

1. Base layer: depending on original soil stability 10-30cm well graded road base.
2. Middle layer:
Indoor: 3-5cm of quarry dust to achieve 100% levelled base fo the footing.
Outdoor: geotextile and drainage pipes and 6/10 clean aggregate drainage layer covered with separation layer – riding mats, geotextile, well graded 0/6 crushed stone layer (5cm) which let water percolate
3. Top layer: 12.5cm sand footing mix. sand 0.063 – max 0.5mm indoor (around 5% fines allowed) outdoor less than 5%

[Read more in chapter 5 "Construction materials".](#)

DESIGNER: OLIVER HOBERG, GERMANY



D. Sand-wood indoor arena

ADVANTAGES AND DISADVANTAGES: Budget friendly alternative that does not put maximum strains on the horse's legs and with correct maintenance will work well in riding schools and as well as for training/competition.

Base and middle layer: see example C
Top layer: sand/wood mixtures,
[see Chapter 5 "Construction materials"](#)

DESIGNER: KARSTEN KOCH



** The specifications of sand and crushed rock materials given in the examples are not detailed enough to guarantee certain properties. The final choice and selection of material requires practical experience.*



9 The Building Process

A riding arena is a big investment and it is important that the building process runs correctly for the end result to meet expectations.



TO DO LIST

- 1 Review finances
- 2 Is the arena outdoors or indoors?
- 3 Set up a timeline for the project
- 4 Obtain the necessary permits
- 5 Investigate ground conditions and the soil
- 6 Consider site conditions including climate
- 7 What is the planned size of the arena?
- 8 Plan the surroundings of the arena
- 9 Is there water access? Plan for watering!
- 10 Have a tender process for the work, demand tenders
- 11 Final disposal of the material

TIMELINE

When planning an arena it is important to set up a timeline for the project, early on. It should describe what and when things should be done. The different steps are described below. An experienced contractor can help in several of the steps.

TENDERS

To control the end result and costs for an arena it is very important to include a tender process for the planned work. Tenders should then be reviewed, and references obtained from previous customers. If the customer is a local council, the project can require an official tender process with its own regulations. A tender must include specifications on arena size and materials ([see chapters 5 "Construction materials" and 8 "Construction principles"](#)). A contract can have different scopes, each with drawbacks and advantages. A contract can also include preparations such as building permits and land testing. There are two main alternatives; a labour only contract with individual contracts for each single part of the installation, including drainage and digging, materials, putting the materials into place, and fencing. The other solution is a full contract, where you set functional demands. If you choose to make a contract with a prime contractor, a so-called general contract, they in turn have sub contractors and they coordinates their work. The drawback is that the total price is usually higher but on the other hand, the prime contractor takes responsibility for the coordination and can have his own beneficial contracts, for example, for materials. A contractor can also suggest alternative solutions that the customer was not aware of. A tender process can be divided into:

- Implementation (all planning is done before the tender)
- Function (final planning is done after the tender)

Function can, for example, concern the drainage system.



TIP!
Plan to build or renovate an arena during the summer months. Then it is easier to have the use of other land for riding and avoid feeling pushed to make shortcuts to finish the work.

**TIP!**

Many countries will have national

Geological Institutes, with specialist knowledge on, for example, minerals and soils that can apply to riding arenas. One such organisation at EU level can be accessed through:



**CLICK AND
READ MORE**

THE FOLLOWING POINTS MUST ALL HAVE BEEN FINISHED BEFORE THE CONSTRUCTION WORK ITSELF CAN START:

Permits

Before the arena is installed there are a number of necessary points that must be prepared and can take time. Contact the local council.

EXAMPLES: Are you planning to build in a built-up area with city planning, or in a rural area? Is the establishment classified as an agricultural business or not? Do you need building permits? Permission from neighbours? Is the site of possible archaeological interest and needs a test excavation?

Land and soil testing

Before the building plans progress further it is important to test and investigate the site based on type of soil and land. An experienced contractor with knowledge of geology is a suitable advisor. The findings can determine whether it is feasible to have a simple version of an arena ([see Chapter 8 "Construction principles"](#)) or not. The drainage conditions are very important for the long term function of the arena surface!

QUESTIONS: Does the land have natural drainage or not? What is the location of the site? Does the site contain so called light soil? What in that case is the percentage of humus and clay? All light and clay soils including former bog land must have drainage installed! Clay soils can also have "water pockets", beneath the surface. Check how compact and strong the original soil is? (soft, bog, swampy, dwells) and in mountain areas check on hill water which may weaken the natural soil or suddenly come up like a dwell when starting earth works!

Size

An outdoor arena should measure at least 60 x 24 metres if it will be used for jumping. For competition 30 x 70 metres or comfortable is 40 x 80 metres.

Plan the surroundings

It is also important to design and plan the surrounding area of the arena, including access for arena maintenance. You need paths/roads to the arena for horses and maintenance equipment. The entrance to the arena itself should be at least 2.80 metres wide, to allow for machinery, and 1.50 metres for horses. The perimeter fence around an arena used for jumping should be at least 1.20 metres high.

Water access

The access to and delivery of water must be calculated and planned before building starts. Moisture is a determining factor that directly affects the properties of an arena surface. No arena will meet expectations unless moisture is at the right level. The same arena, or other riding surface, can change properties completely depending on if it is dry, moist or very wet.

Many stables do not have sufficient water supply. In these cases it is important to consider solutions to improve water access, such as water tanks and/or dams for collection of surface water. Such plans should include contact with the local council in case permits are needed.

Laws and permits

Contact your local council to find out if and what laws and permits apply to the building of a riding arena.

Final disposal

The disposal rules for the arena surface at the end of its lifespan is an important point to consider in the choice of materials. As is mentioned in Chapter 6 and 7, there can be great differences in the cost of disposing natural materials such as a sand-wood mix, that can be put on your own or other agricultural land, compared to a surface mix containing synthetic materials such as fibre, that demands waste disposal handling with fees per ton. ([See also Chapter 6 "Budget"](#) and [Chapter 7 "Environment and sustainability"](#)).



10 Competition, multi-purpose arenas and problem solving

Different disciplines can certainly share the same surface. But it is then important to understand how a surface can be modified with maintenance to address different demands.

THE CHAPTER IN BRIEF

If an arena is used for different activities and disciplines expectations can vary. Traditionally, jumping and dressage riders have had different demands, with dressage riders wanting less impact hardness and less grip. Experience from international championships with both disciplines competing in parallel on the same surface has shown that riders from both can be satisfied, with the help of appropriate maintenance work. In addition experience shows that a surface with more impact hardness, as expected for jumping competitions, gives the dressage horse better traction in piaffe and passage.

Previous chapters describe arena solutions for stables/establishments with different demands and profiles. There are certain demands from some disciplines due to the horse affecting the surface in a certain way (and vice versa!). Maintenance measures can help you to modify an arena surface on a day-to-day basis by riding school horses, in a way that makes it suitable for a competition. But one issue is whether surface properties expected by competition riders for performance, such as high friction, increases the stress and strain on the horse's legs if used on a daily basis. There are research findings – albeit based on limited data – showing an association between use of sand-wood mixes (with less natural grip) and lower risk of losing training days due to injury ([Read more in Chapter 2 "What does research say?"](#)). Sand-wood meanwhile has a shorter "lifespan" than synthetic mixes, but is cheaper to install. With the right maintenance a sand-wood surface can work also in competition, albeit not at the highest levels. Correct maintenance is however very important so that the material does not form "crusts" underneath the top layer, posing a serious risk for slipping (the arenas in the study with positive findings on sand-wood were private and in general well maintained and not aged).

The choice of top layer material for an arena at an equestrian establishment should be influenced by a combination of finances, resources for maintenance and any plans to hold competitions ([see Chapter 5 "Construction materials" and 9 "The Building Process"](#)).

What should you do if you need to be able to use an arena for more than one purpose?

MAINTENANCE AND COMPETITION

As seen before the same surface can vary in its properties with different maintenance (or lack of!). Competition surfaces, especially at higher levels, demand slightly different properties to training surfaces. Preliminary results from a recent FEI competition surface study have shown that riders at international top level competition value firm surfaces, with impact firmness, cushioning, good responsiveness and good grip (which potentially increase the load on a horse's leg). One recurrent observation is that many riders expect such properties with performance in view, but choose to train on other surfaces (with less firmness and less grip). This potential contradiction is mentioned in the beginning of this guide; the balance between performance and risk of injury.

PLANNING FOR COMPETITIONS

In advance

A good general maintenance plan is the first step for someone who wants to use an arena for more than one purpose, with different demands or expectations.

If you run a riding school where the arena is sometimes used for competitions, your day-to-day maintenance will influence how early you need to prepare to adjust to competition demands. A well-maintained arena with, for example, a good moisture level will require less preparation specifically for the event. Modifying your maintenance for competition will allow you to have the best possible preparation and provide consistency during the competition despite increases in traffic.

One vital point is to check before a competition (and at any time) that the arena does not have a hard “crust” beneath the surface, which is especially relevant for traditional sand-wood surfaces, but at a lesser extent can occur also with synthetic arenas. This poses serious risk of horses slipping. Such “crusts” can be eliminated through deep harrowing ([Read more in Chapter 11 “Maintenance equipment” about sand wood and harrows, or equivalent in synthetic surfaces](#)), but that must be done in advance of the competition.

One example is watering, which for some arenas can need to be adjusted at least a week in advance of the competition event, if not correctly watered at other times. Rolling should not be necessary at a well-maintained permanent arena.

On the day

On the day of competition it is important to keep the surface uniform to meet riders’ expectations (and potentially prevent injury). This must be achieved with little yet sufficient maintenance during the class. With up to 40 starters in a jumping class the surface can be raked by hand between horses. Classes with more than 40 starters should have intervals of 10-20 minutes to

allow for further raking or the use of a tractor, in order to ensure consistent properties of the surface for all participants. This can be a major challenge in classes at lower levels with very high numbers of participants in one class.

One advantage with fibre/waxed sand materials in competitions is that they maintain more consistent properties through a whole class, compared to traditional surfaces.

Experiences from competitions in Sweden have shown that even with a professionally installed commercial surface, correct maintenance during the competition is very important to satisfy riders demands.

Temporary surfaces

Plenty of competitions, especially at international level, are held on temporary surfaces at multisport/event venues. This involves very different building principles compared to a normal riding arena. For a start it is not possible to make several layers, with the exception of using rubber mats or similar. The greatest challenge lies in getting the surface to “settle” in time. Normally this process requires weeks or months. At temporary venues they must be rideable after one to three days. Mechanical arena testing indicates that the surface settles day by day as the show progresses, and would not be suitable for permanent use.

Experience shows that the same arena surface can be modified to satisfy demands both for competition and training, with maintenance such as watering and rolling for competition and then “loosening” the surface, to make it less hard for training.

Discipline-specific expectations

The same principle applies to modify the surface for jumping versus dressage. Traditionally, jumping and dressage riders have slightly different expectations and demands of a surface. Experience from international events including championships such as the Olympics or World Cup Finals with dressage and jumping

held in parallel show that the two disciplines can share the same arena.

Traditionally, jumping riders expect a surface with more impact hardness. This is achieved mainly through rolling the surface and increasing moisture content by more watering, started a few days before the event so that all layers of the surface become thoroughly moist.

Dressage riders traditionally want a looser (softer) top layer. This can be achieved by harrowing/dragging of the superficial layer.

COMMON FAULTS AND SUGGESTED SOLUTIONS

Hard outdoor arena

ACTION: Add natural sand without filler, that is washed sand, so that the filler fraction decreases ([see Chapter 5 "Construction materials"](#)). Put down 1-2 cm, and mix with the rest of the surface layer. Order: (washed) 0.1-2 gravel/sand outdoor, (washed) 0.1-2 sand indoor.

Hard track (the rectangle along the fence/wall):

ACTION: Regular (once a week) deep harrowing of the track itself (if sand-wood).

Dusty outdoor arena

ACTION: Watering Use a water tank or preferably install automatic sprinklers. There

are different opinions on adding salt (mixed into the top layer, not left on the surface). On an outdoor arena the salt over time can block the separation layers and affect drainage. Indoor that is not an issue.

Loose/deep indoor surface

ACTION:

1. If the top layer is thick; remove some top layer material with the aid of a road grader.
2. Add fibre ([Read more in Chapter 5 "Choice of sand for fibre surfaces"](#))

Unlevel/uneven arena

The top layer is unlevel, for example, 4 cm thick at one end and 15 cm in another.

ACTION:

1. Level it with the aid of a road grader.
2. Review maintenance regime.



TEST

If you want to make changes in an arena by, for example, adding a different material but are unsure about the effects, one solution is to make a "test area". Mark an area of, for example, 10x10 metres and do the changes there, ride on it and feel the result. If the results meet your expectations the next step is simply to make the same changes across the whole arena. If you feel it did not work out you simply spread the material from the test area across the whole arena so that it gets diluted, and the negative effect is limited.

Oliver Hoberg

Course builders in jumping must familiarise themselves with the arena in advance, and determine any quirks such as an area with less grip or other inconsistencies. This should then be taken into account in the way the course is laid!



11 Maintenance and renovations

Correct maintenance is essential for arenas to function and meet expectations.

THE CHAPTER IN BRIEF

Correct maintenance is essential for arenas to function and meet expectations. Here is a checklist for the most important aspects. All points are discussed in more detail later in the chapter:

- **SKILLED ARENA STAFF** – assign responsibility for arena maintenance to one-two persons in the yard and give them the chance to develop experience
- **SUITABLE MACHINERY** – different top layer materials require different equipment
- **REGULAR AND FREQUENT MAINTENANCE** – daily for optimum results
- **SUITABLE AND EVEN APPLICATION OF MOISTURE** – good access to water (for irrigation) is very important for arena maintenance
- **AVOID MANURE CONTAMINATION** – or be prepared to replace the top layer much more frequently
- **ANNUAL RENOVATION**



IT IS IMPORTANT TO VISUALISE THE MAINTENANCE AIMS

- Keep an even distribution of the top layer across the whole arena, to avoid thicker or thinner areas or with hollows in some places and mounds in others.

WHY? Otherwise the surface properties will be inconsistent, which has an adverse effect on performance and has the potential to increase injury risk.

- Maintain the mixture of different materials in the top layer so that, for example, loose fibres do not collect on the top of the surface in a sand-fibre arena.

WHY? If the materials get separated the surface loses the intended properties.

- Prevent compacting of the top layer, especially on the track or at the entrance.

WHY? A common problem in older or badly maintained surfaces is that a hard “crust” of compacted material has formed below the top layer. Such a crust can reduce traction and grip, which will increase the risk of horses slipping and falling. Compaction also increases impact hardness, which has been shown to increase injury risk. Crusts can be prevented by appropriate maintenance regimes.

- Maintain correct and consistent moisture.

WHY? The properties of a surface change substantially depending how dry or wet it is. A dry surface is harder/deeper, making it more taxing for the horse, and creates dust, which can affect the airways of horses, riders and trainers/coaches.

What should you also keep in mind?

- Protect the deeper layers so that the geotextile layer is not damaged.

WHY? Stones from the base beneath can “creep” to the top, creating an injury risk. If the geotextile layer is damaged or disturbed it can crease into folds. This poses a serious risk of accidents, if a hoof gets caught in the folded material.

- Keep the arena free from manure! This is a strong recommendation from many commercial producers of fibre-sand/waxed surfaces, but it is also very relevant for traditional arenas with sand-wood mixtures. To be really thorough you should also make sure that tractor tyres and horses’ hoofs are clean when entering the arena.

WHY? Manure that gets blended into the top layer affects the properties of an arena and will shorten its useable lifetime. One undesirable effect of manure is to decrease grip and traction. In waxed sand arenas, manure can cause the wax to dry out. Manure left on a surface can also affect air quality for horses and humans and cause bacterial growth, especially in warmer climates.

In conclusion maintenance affects all surface properties and characteristics that are described [in chapter 5](#) “Construction materials”:

- Impact firmness, cushioning and responsiveness
- Grip
- Uniformity and consistency over time



WHAT DOES SCIENCE SAY?

Biomechanical testing by

the equestrian surface researchers have demonstrated that the properties of a certain competition arena will change and can improve from one day to the next according to the maintenance measures. Studies of Thoroughbred racehorse have found that and the intensity of use and frequency of racecourse maintenance procedures affect the risk of serious injury, including catastrophic fractures. Here are short summaries of two scientific papers concerning maintenance and surface properties:



[CLICK AND READ MORE](#)



[CLICK AND READ MORE](#)

PLEASE NOTE: The maintenance strategies described here are aimed at keeping the arena in the best possible condition. Compromises based on (lack of) finances or time will also mean compromises regarding the properties of the surface, the length of use and potentially the soundness of horses using it.

The “lifetime” of an arena (with acceptable function) can vary from three to 20 years, depending on the choice of materials, wear and maintenance. Arenas need both regular maintenance and occasional more thorough renovations. Maintenance-free arenas do not exist.

Remember also:

- Do not use the arena as a paddock/turnout area, leaving the horse without supervision. A horse turned loose in an arena increases the risk of contamination from manure and other organic materials, and may cause the top layer to become un-level. Of course the horse can be let loose for a few minutes to have a quick roll or a canter, but this should be followed by maintenance.
- Lunging with the person standing in one place is a common cause for the top layer to become uneven, and should therefore be avoided. Vary activities across the arena, so that not everybody rides along the track, fences are not always in the same place or horses being lunged are not always lunged in the same spot.
- Outdoor and indoor riding arenas have different needs and conditions. Watering is one example; a heated indoor arena will have greater evaporation of moisture than an unheated one, which may need to be rectified by watering



An important aspect of arena maintenance is to learn to “read” the surface and notice how the top layer is distributed, so that mounds and hollows get evened out. A maintenance person/arena worker should also keep a dialogue with the riders using it.

“Watering has a better effect if the arena is completely level.”

Karsten Koch



ARENA STAFF

It is very important that maintenance work is done by persons who either have good experience, or are given good training. The more experience the arena person has, the more he or she will notice and adjust irregularities in the arena surface. It is also very important that the arena person has sufficient time set aside for the work!

A yard/stable dependent on volunteer work should appoint one or two persons with a natural interest in arena work to take responsibility for the condition of the arena and to maintain it continuously. The same applies for yards/stables with paid staff.



TIP!

Practice studying hoof prints, as a reflection of surface properties. How deep has the hoof gone into the surface? Is it a clear imprint or hardly detectable and did the hoof slide across or into the surface? Also watch how horses move on a surface.

WATERING

As discussed in chapter 5 on materials access to, and distribution of, water are important. This can be achieved using a variety of different systems:

- Ceiling sprinklers
- Wall sprinklers
- Water trucks
- Moveable sprinklers
- Waterhoses

For watering to have the intended effect it is very important that the water is evenly distributed throughout the arena. If some parts of the arena get wetter than others this will cause inconsistencies and unevenness that is suspected to have a negative effect on the horse and its performance. It is difficult to provide an even distribution of the water without watering from the ceiling.

In other words, moisture should be equally distributed in the surface. Especially outdoors, it is important to analyse differences in evaporation at different sites in the arena. Are some areas always in the shade, while others are lit by the sun? This probably means that the sunny spot dries quicker, while the shaded spot stays wet or moist. This applies for indoor arenas as well. Areas hit by sunlight through windows or light bands in the roof dry out much quicker than the areas which will never hit by the warm light/sun.

Entrance areas with mostly open doors create a constant airflow or even wind which let the footing dry out much faster!

Recommendation: water the arena according to the needed moisture in the shaded and more moist areas and adjust additional hand watering (if no zone sprinkler system is installed) in the sun or wind exposed areas! The arena surface will then be inconsistent, with variations in its properties. There are sprinkler systems with timers that can con-



Photo: Roland Thunholm

”Practice feeling the sand in the arena! I use my hands as “testers” and it is interesting to compare what I feel with the results of biomechanical testing by the “mechanical hoof”; what I feel and the test equipment registers usually match well.”

Oliver Hoberg

trol and vary the distribution of water across the arena to compensate for shade/sun. Watering is an art and as with the rest of the maintenance programme, should have one or two experienced people consistently in charge. There is less need to water waxed sand materials compared to other materials.

Watering in a cold climate

Watering in a climate with temperatures below freezing is difficult to undertake due to the risk of the surface freezing when water is added. One suggestion is to prepare early by planned watering during autumn, so that the surface layers are thoroughly moist in advance of the freezing temperatures and add salt to prevent freezing (see the section on salt).

MAINTENANCE EQUIPMENT

It is important to include maintenance equipment in the calculations when budgeting for a certain type of arena. Arenas with traditional surfaces such as sand-wood mixtures can be maintained with traditional farming equipment. Fibre and waxed sand surfaces require special equipment, which is more expensive than the corresponding farming machinery.

If you buy or have bought a “ready-made” arena it is important to request advice and information on maintenance from the producer. This should include machinery (type of tractor, harrow or drag, and also the type of tractor tyres), how and how often maintenance should be done, watering and possibly the use of salts. However not all contractors/producers offer well thought out maintenance plans.

Machinery for sand-wood:

1. Tractor, light farm type

It is important that the tractor has an adjustable hydraulic arm/lever, to adjust the height of the harrow. Daily dragging and harrowing can be done using a quad bike or car to pull the harrow which will smooth the surface top, but without a hydraulic arm it is not possible to create pressure to redistribute the surface material. A “wave” effect can be caused by a lack of material re-distribution. A tractor is required for deep harrowing, which is also an important part of arena maintenance.

2. Drags

Drags like harrows are available in different models. One simple version is a steel wire net. The wire needs to have a diameter of at least 8 millimeters to be strong enough. The wire net should also be steel re-enforced (stiffer) at the back and front edges, otherwise it is likely to be bent into a hammock shape. The drawback with this simple solution is that it only smoothes the superficial layer. Farming drags are required for a more thorough effect.

3. Harrows

For traditional sand-wood mixtures regular harrowing is important. Rigid tine harrows and sprung harrows are the two main types. Opinions differ as to which type is preferable for riding surfaces. One argument for rigid tines is that they can be used for deep harrowing, which is important with sand-wood mixes.

WHAT IS DEEP HARROWING? Deep harrowing means working through the layers of the top surface to break up the “crusts” of compacted material that may have formed just beneath the top. It is important to firstly measure the depth of the top layer and then adjust the height of the tines accordingly. They should reach as deep as the layer is thick, but not disturb the separation layer.



HARROWING TIP

It is important that the outside track is harrowed. Normally the harrow is a bit wider than the tractor, and if you drive in an elliptical pattern you will reach all the way out to the edge. But you can also use the hydraulic arm to angle the harrow down on the outside edge then the harrow will have more effect.

Lars Bergström



“No arena is better than the maintenance it gets.”

Oliver Hoberg



ABOUT TYRES

It is important to consider the tractor tyres. Oliver Hoberg advises that standard farm tractor tyres are too harsh for a riding arena as they create pressure that is too high and too uneven. As long as you drive straight ahead there is no real problem, but when turning these tyres push sand to the outside. One compromise is to choose so-called turf tyres that do not have such a heavy tread pattern. (A cheaper and unconventional alternative suggested by a different consultant is to use worn tyres with less tread!)



R1 is disaster while R3 (turf) and R4 (industrial) are good tires.



LEARN FROM THE PROS – "HOW TO" VIDEOS

Arena maintenance is an art. Everyone asks "what is the best surface" but to get a good arena surface for the horse the right maintenance is key.

These five instructional "how to" films offer advice and suggestions from pros and researchers, including equestrian Olympic veterans.

Equestrian arena maintenance – for equine soundness and health



Dragging, harrowing and common driving patterns



Keep the arena free from manure!



Equipment



Irrigation



Driving patterns for arena maintenance





◀ A traditional arena needs deep harrowing in order to break up compacted material. This means that it is important to build the arena so that a tractor and a harrow can get in and out. If the arena is only accessible for a quad bike deep harrowing is impossible!

Machinery for fibre/wax

Fibre-sand and waxed sand surfaces require a combination of harrows and drags, which are available in about 4-5 different models. They can be towed by a quad bike or special light tractor. An advantage with these surface-specific machines is that they can be adjusted for depth so that the surface material is worked at different levels.

MAINTENANCE PLANS

Maintenance needs to be planned. Here we give suggestions about frequency and technique, but the needs of the arena will, of course, be influenced by how often it is used and how it is used. The experts also give individual suggestions.

Annually

Plan to relevel the arena annually with a road grader, to keep the material evenly distributed and prevent “waves” in the top layer. This can be combined with laser beam testing to fine tune the levelling. It is important to realise that an arena with areas of compacted material or “crusting” beneath can be level on top, but still not consistent, if the crusts and compaction are left untouched. This can be prevented by deep harrowing before the road grader.

Wood products (woodchips, sawdust) decay over time. Remember also that the sand in the top layer irrespective of good maintenance will be subject to mechanical wear, as the hoof acts like



IMPORTANT

A farm harrow is not suitable for maintenance of fibre sand or waxed sands! (see below)



REMEMBER

The number of horses using the arena in a day is not the only criteria for maintenance. The type of activity is also important; a few horses in a jumping session can be enough for the material to become uneven and need adjustment. The age of the surface is also a factor; an older surface might need more attention.



TIP

Using a road grader on the arena to (re) distribute the material and get it even is a good option. But if you have an arena with areas of very compacted material beneath the surface the most efficient solution is to scrape off the entire top layer, work it through to loosen in the compacted areas, and then redistribute the material.

Oliver Hoberg

a “grinder”. How quickly this occurs is also dependent on the sand mineral (see [Chapter 5](#) “Construction materials”). This means that over time fractions of the sand turns into dust, or more “filler” (see [Chapter 5](#) “Construction materials”). The arena will then become more compacted, and the fine grains of the “filler” can clog the drainage and geotextile layers. Regular and correct harrowing helps prevent the filler material from “drifting” downwards through the arena layers. Some sand is also lost when removing manure. It is therefore advisable to do regular top-ups with new material, and scrape it off at longer intervals. This is also an opportunity to check on the road base beneath the top layer, and the drainage.

Every week/day

MOST IMPORTANT: Keep a suitable degree of moisture (with the help of sprinklers). An outdoor arena should be watered every day in dry weather. (Watering systems have their own section in this chapter).

OUTDOOR:

Expert A: Daily maintenance!

Irrespective of the number of horses using it.

Expert B: Adjust the frequency of maintenance to the frequency of use:

10 horses/day:

Sand-wood: Daily dragging, deep harrowing once a week.

Fibre/wax: daily dragging with special equipment (do not deep harrow!).

INDOOR:

Expert A: Daily maintenance if it is used by about 20 horses or more. If the daily horse number is around 5, every third day can be sufficient.

30 horses/day:

Sand-wood: Daily dragging, deep harrow twice a week

Fibre/waxed sand: Daily dragging with special machinery (do not deep harrow!)

HOW TO

Arena maintenance is a question of experience and individual talent. Here is some advice about equipment use:

Dragging

When dragging it is important not to drive too fast or too slowly. The material should move smoothly in the drag. If you drive too slowly it will gather at the front. If you drive too fast the material is thrown about and gets uneven.

PATTERN: Alternate between driving clock-wise and anti-clockwise. Start an elliptic oval from one short end and continue the pattern across the whole arena. Next do a rectangle along the long side to the middle of the arena, and repeat this rectangle sideways

until you are on the other side. An alternative is a round wrap-over pattern so a version of the ellipsis but rounder that includes the edge along the fence or wall.

Harrowing

SUGGESTIONS for deep harrowing: Alternate between driving clockwise and anti-clockwise. The tines should be making lines in the stonedust (or other) layer beneath the surface, but it is just as important that the geotextile layer is not damaged or moved. Adjust the tines based on how deep the top layer is.

SALT

As with other materials “salt” comes in different versions, for example, sodium chloride and calcium chloride. You use salts for different purposes; to bind dust and decrease the need for watering, or to prevent the arena from freezing. Salts can affect the arena and surface properties, in addition to their effects of binding moisture and lowering the freezing point.

There are suspicions/experience that the salt can create crystals that clog the arena drainage. The amount of salt is also an important consideration. Outdoors it can affect drainage, and be rinsed out. Both outdoors and indoors the salt can help “bind” the layers of the surface and make it harder. Does the salt pose any risk for horses? We do not

know for sure, but it can probably cause skin irritation if the horse has small scratches, including from clipping. (Small animals running on the arena may have irritation of their paws).

How often?

SUGGESTION (in a cold climate): Indoors put down salt about 2-3 times a year, for example, in the autumn combined with watering, in preparation for freezing temperatures later.

AMOUNT: Outdoors depending on weather conditions; 0.5-1 kg per square metre is one suggestion (or 800 kilo in a riding arena measuring 20x60 metres). Another guideline indoors is to use magnesium chloride at maximum 125 gram per square metre. (Magnesium salt has the advantage of being less corrosive to equipment and machinery).

PREPARATION: When putting down salt it is very important to use a harrow or other equipment to mix the salt thoroughly with the rest of the material, so that it does not stay on top.



REMEMBER

An important aspect of arena maintenance is to learn to “read” the surface and notice how the top layer is distributed, so that mounds and hollows get evened out. A maintenance person/arena worker should also keep a dialogue with the riders using it.



12 Functional testing

How a human and a horse experience a surface will differ greatly. But mechanical testing has been developed to give objective testing of arenas.

THE CHAPTER IN BRIEF

- How does your arena function?
- What expectations should you have of an arena that you are planning to build?
- What feel will you and your horse get from the arena surface at your next competition?

It is obviously the arena function that is important. But can you measure that, and how?

There are several tests to test, for example, roads or evaluate soccer pitches, but such equipment is not relevant for a riding arena. The response from the surface will be different when a horse is moving on it compared to if a soccer player is running. As is pointed out in Chapter 4 it is impossible for a person to “test” how a surface affects the horse by, for example, jumping up and down on the ground. ([Read more in Chapter 4 “Arenas, their function and properties”](#)).

How a riding surface responds to the load from the horse is important and to be able to measure it by mechanical means is equally important, in order to understand what effects the surface has on the horse. As described in previous chapters the properties of an arena are determined not only by the choice of materials but also construction, age, maintenance and moisture, from either rain or watering. Scientific testing of arenas has demonstrated that:

- Two arenas with different top layer materials can have very similar properties
- Two arenas with what looks as the same top layer can differ greatly in how they affect the horse

How a horse experiences the function of the surface, and the resulting loads exerted on their limbs during training and competition on the arena is crucial for soundness and performance. There are plenty of mechanical tests for evaluating, for example, a soccer pitch or a road, but these tests are of little use on a riding arena because the response from the surface is different when the load is applied by a moving horse. As mentioned in chapter 4 regarding the functional properties of an arena, it is impossible for a human to evaluate how an arena affects the horse by, for

example, jumping up and down on the spot.

Arena testing for both soccer and equestrian sport can be done by using the athlete (human or horse) to make measurements. To do this sensors that register forces or vibrations are attached to the leg and foot or hoof. Recordings are made each time the hoof makes contact with the ground. The advantage of this type of testing is that what you measure corresponds with what the athlete experiences, which provides information about potential performance benefits and injury risks. The drawback is that the measurements are influenced by the individuals themselves, which makes it difficult to get exact comparisons between arenas, unless the same individual is tested each time. Tests should be carried out with equipment that is standardised and validated. There are also a number of testing machines in which sensors such as accelerometers or force metres register a response from a surface. In order to obtain relevant information about functional properties any testing machine for equine surfaces must mimic the loading conditions of a horse taking into account weight and speed.



[CLICK AND READ MORE](#)
(scientific White Paper)

THE ORONO BIOMECHANICAL SURFACE TESTER

The Orono Biomechanical Surface Tester was developed for use on Thoroughbred racecourses in the United States, and then adjusted for equestrian riding surfaces at SLU in Uppsala. It is often called “the mechanical hoof”, as by dropping a hoof shaped projectile at an angle to the ground it mimics the impact of the horse’s hoof on the surface. The machine is mounted to a truck or van of sufficient weight and is supported by a frame, which is placed on the ground for stability during testing.

The metal “hoof” is mounted beneath a heavy weight, which is dropped to the ground between two guide rails. When the weight is released, the mechanical hoof first hits the ground at a specific angle which has been determined based on measurement from high-speed motion capture of horses’ legs. Thus the mechanical hoof mimics the motion of the forelimb of a horse during the early landing/touchdown phase, as a simultaneous downward motion and forward slide of the ‘hoof’ occurs when it contacts the ground. An accelerometer mounted on the metal hoof measures the surface hardness. A load cell measures the impact of the heavy weight as it loads the ‘hoof’ to a maximum in both the vertical and horizontal directions. This, in combination with position sensors on the

hoof, measures the cushioning of the surface during the loading phase, the amount of grip and the surface responsiveness. For testing of equestrian surfaces the mechanical hoof of the machine has been set to mimic that of a medium-sized Warmblood horse.


COMPETITION ARENA TESTING

Tests with the mechanical hoof described above are not commercially available at this stage, but the Fédération Equestre Internationale (FEI) is considering it as the standard for testing arena surfaces at major competitions, including championships such as the World Championships or the Olympic equestrian events.

During competition, the horse performs high intensity work resulting in high loads on the bones, joints and tendons/ligaments. Preparation for competition not only requires the horse and rider to have the necessary technical skills, but also the horse’s bones, joints and tendon/ligaments must be adapted sufficiently to withstand the loads experienced during competition (**more about adaptation to training in Chapter 2**). Individual horses adjust differently to specific surfaces. One aim of surface testing at competition venues is to inform riders what characteristics and properties to expect, in order to decide whether the surface properties at a certain

competition are suitable for a specific horse, and/or let the horse train and thus adapt on equivalent surfaces. Hopefully in the future competition surfaces at medium and lower levels will also be tested. The competitor will

then have the opportunity to learn about the arena surface properties expected at specific shows before entering, and based on that information decide if his/her horse is suitably prepared to compete on that surface.

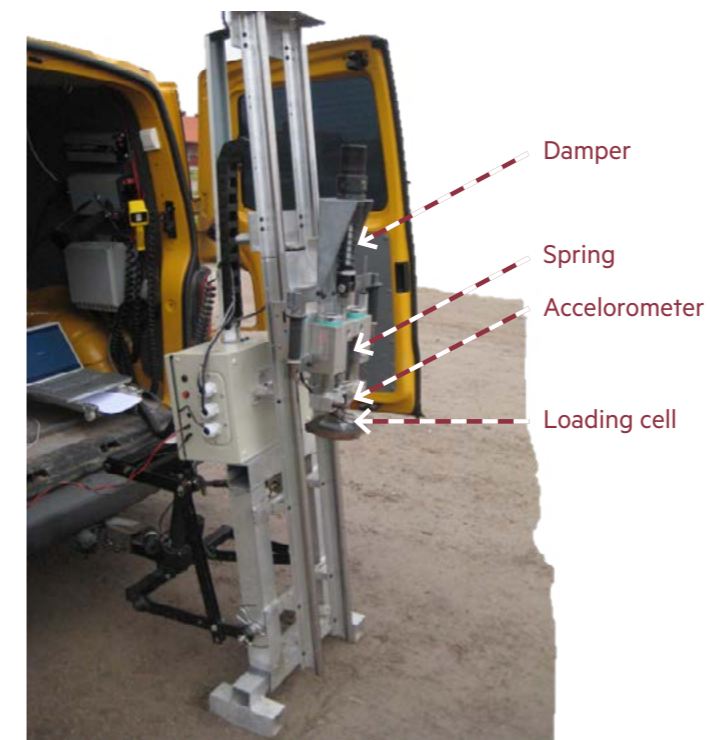

▲ The Orono Biomechanical Surface Tester simulate the impact of a horse’s leg on the ground. The machine is mounted at the back of a van or truck of sufficient weight, for ease of transport between and on arenas, and is supported by a frame, which is placed on the ground for stability during testing.



▲ The metal “hoof” is mounted beneath a heavy weight, which is dropped to the ground between two guide rails. The rails have different angles, which mimics the motion of the early landing/touchdown phase, as a simultaneous downward motion and forward slide of the ‘hoof’ occurs when it contacts the ground.

13 Grass

Grassland is the natural habitat of equines, ever since their ancestors of millions of years ago. Grass, or "turf", is also the traditional surface choice in many horse sports, and if properly managed can offer optimum surface properties for the horse. In addition using grass in training helps promote the variation of surfaces that is regarded as playing an important part in preventing injuries.



THE CHAPTER IN BRIEF

A correctly laid down and maintained grass arena with the right amount of moisture content, offers the horse a riding surface that is close to the "optimum profile" that many riders ask for; elasticity, dampening, uniformity, and the "right" amount of grip and surface impact firmness. When a grass surface is criticized the background is often insufficient maintenance, or lack of basic groundwork. With input from high profile turf experts this chapter discusses how to achieve a good grass surface for riding, with the importance of the grass plant and its roots, grass species, land and soil, and the importance of decompaction, moisture and fertilisers – and the sometime need to completely renovate an arena for top level competition.

CONTENTS

➔ Background on grass as a surface for horses

History and new developments-using a variety of riding surfaces-horses' adaption to different surfaces-horse preferences-grass and injury risk/racehorse research-properties and testing-maintenance

➔ Grass surfaces

Not just leaves of grass (blade, roots, air, water and permeability, soil)

➔ Construction and renovations of a grass surface

➔ Maintenance

Cutting-irrigation-fertiliser-weeds-airing and decompaction-dressing-spot repairs
Machinery needed

➔ Stud use

➔ Case studies

Construction, renovation and maintenance:
Burgley CCI*****
Hickstead CSIO****
Falsterbo CSIO*****
Luhmuhlen CCI*****
Tullstorp Dressage Stable
Grevlunda Fredricson Showjumping
Equestrian centre with national showjumping shows
– Central Sweden

ADVISORS ON THE CHAPTER



Edward Bunn,

Showground manager and co-Show Director, Royal International Horse Show****, Hickstead



Simon Claisse,

Clerk of the Course, Cheltenham Racecourse



David Evans,

Course builder Luhmuhlen Horse Trials****, Tokyo Olympics 2021



Philip Herbert,

Clerk of the Course, Burghley Horse Trials*****



Andrew Tulloch,

former Clerk of the Course, Aintree Racecourse, now Head of Operations Bolesworth International Horse Show



Stig Persson,

Clerk of the Course, Falsterbo CSIO*****

WITH



Sarah Jane Hobbs*,

Reader in Equine and Human Biomechanics at the School of Sport and Health Sciences, University of Central Lancashire



Lars Roepstorff*,

Professor of Equine Functional Anatomy at the Swedish University of Agricultural Sciences

SPECIAL THANKS TO



Yogi Breisner,

MBE, British Eventing Team Performance Manager (1999-2016), advisor to the Swedish Equestrian Federation, Olympic national coaches and coordinators for jumping, dressage and eventing (2017-)



Mark Ainsley,

Head groundsman, Aintree Racecourse

Special thanks also to the Swedish Equestrian Federation's Reference Group for Riding Surfaces

* members of The International Review and Biomechanical Collaboration Group. LR also member of the Swedish Equestrian Federation's Reference Group for Riding Surfaces. The other members are introduced on page 4-5.

“One aspect of keeping the horse sound is to vary the type of surface he is ridden on.”



BACKGROUND, TRADITION

History and new developments

The main focus of the FEI guide on equestrian surfaces is on sand based arenas. This chapter instead concerns grass. The ancestor of modern horses were adapted to grassland such as steppes, their natural habitat, and grass is still a surface of choice in traditional horse sports such as polo and racing. It is important to remember that until 25-30 years ago the commercial riding arena materials available today, mixing sand and fibre or wax, had not been developed.

In the same time period that sand based allweather surfaces have been developed, sports grass/turf science has also evolved. In the past a racetrack or show jumping arena was much the same as an agricultural field, regarding both grass species and management, but this needs no longer be the case. Research and other work in the sports turf area has resulted in major progress and changes during the past 20-30 years. Grass or turf is a sports surface also for example soccer, rugby and golf. Scientific research into sports turf has resulted in improved grass species and better insights into optimum management. There are similarities in what demands different sports have on grass; it should be hardwearing, it should be possible to restore after use, and it should offer the “right amount” of grip. There are international congresses solely on the subject of grass as a sports surface.

Using a variety of riding surfaces-horses’ adaption to different surfaces

One of the most important pieces of advice on equestrian surface use, based both on scientific studies and well-proven experience, is to vary the surfaces the horse is worked on. That is more feasible if you have access to grass for riding. When grass surfaces are discussed in equestrian sport the focus is normally competition, but it should not be forgotten that it is an excellent surface for training and hacking. One piece of advice for prevention of injury is also that if competing on grass the horse’s body needs to get a chance to adjust by first training on grass. Like for humans the equine body and its locomotion system adapts differently to different surfaces. Thus if you expect to compete at a grass arena the horse should jump on grass beforehand in training.

Horse preferences

An important aspect when comparing surfaces is the well established experience in Thoroughbred racing that different horses run better on different surfaces and in different conditions. It thus varies what an individual horse prefers as the “best” surface. This is increasingly also accepted in for example showjumping at top level. Equine biomechanics researchers such as Professor Lars Roepstorff at the Swedish University of Agricultural Sciences have observed, when using

highspeed motion technology, that the locomotion pattern vary between horses. How the individual horse moves will influence what type of surface and with what properties he is most comfortable with. It can be important that the rider reflects on this matter, and makes a point of sensing how the horse moves, and finds his balance on different surfaces, especially in a high performance situation. As a rider you can develop your "feel" for which surfaces and under what conditions the horse is most comfortable. Does he feel uncertain? Does he move with shorter steps? Or does he move easier than usual?


Grass and injury risk/racehorse research

Thoroughbred and Standardbred racing has a long tradition of scientific research about how racecourse properties can influence injury risk, where equestrianism now has followed. Several racehorse studies indicate that racing on grass (called turf) carry less risk of severe injury in races compared to on sand based surfaces, or what in the United States is called dirt track. One possible reason is that a dirttrack in general is harder than a grass track, and a hard surface increases the load on the equine leg. Results are however not conclusive.

Properties and testing

As shown elsewhere in the FEI Guide to Equestrian Surfaces there is no riding surface

that always has the same properties. This is because properties are influenced by a number of variable factors including moisture content. Traditional opinion states that well maintained, established grass will provide excellent cushion for the horse's legs, through both the grass, its roots and the soil structure. Professor Lars Roepstorff's biomechanics and equestrian research group at the Swedish University of Agricultural Sciences have tested grass arena properties with the "mechanical hoof" presented elsewhere in the guide. As yet unpublished data indicate that a correctly laid down and maintained grass arena with the right amount of moisture content, has properties that are close to the "optimum profile" that many riders ask for. It offers the horse elasticity, dampening, unity, and the "right" amount of grip and surface impact firmness; again very close to what can be seen as an optimum profile for many horses and many equestrian disciplines and activities. Tests also indicate that there can be large differences in the properties between a grass arena that is well maintained and with a deep root system, compared to one that has dried out and has a rough, uneven surface. A UK equine biomechanical science group led by Sarah Jane Hobbs of the University of Central Lancashire, and collaborating with Professor Roepstorff, has an ongoing study in the UK testing surface properties of eventing cross country tracks.

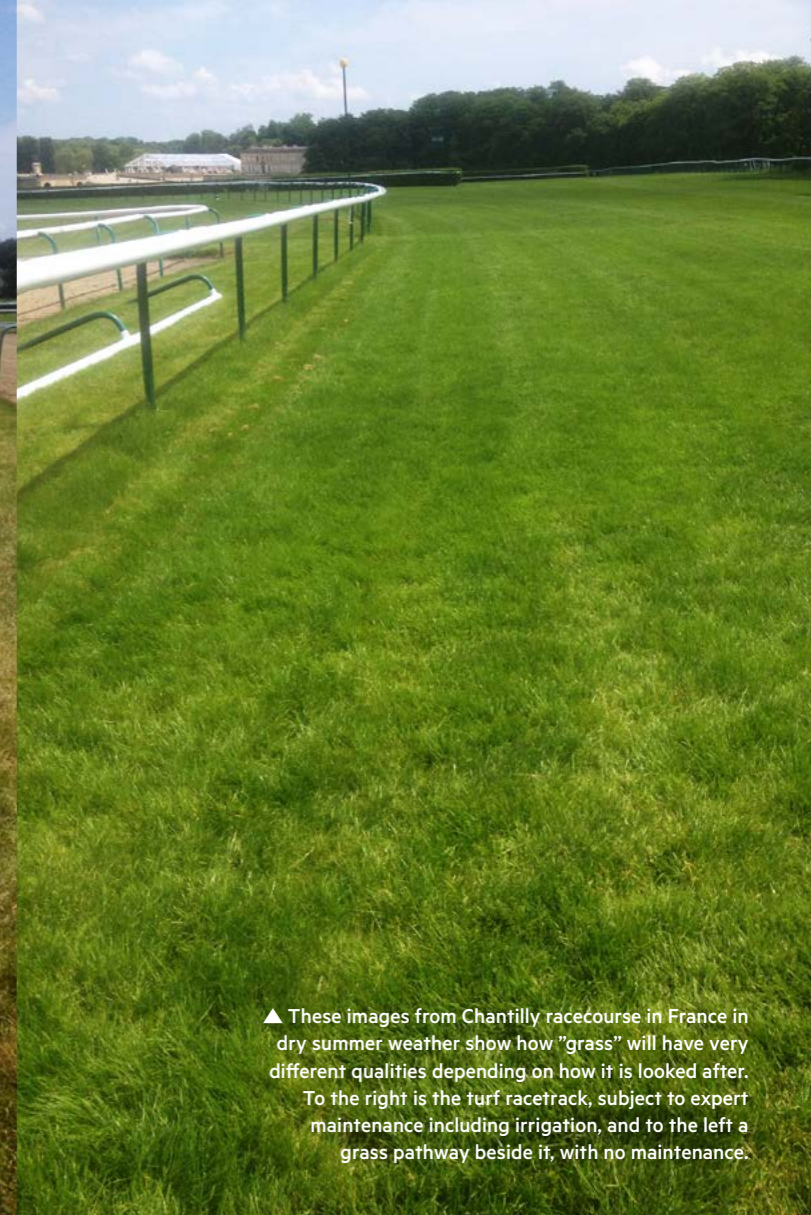

▲ These images from Chantilly racecourse in France in dry summer weather show how "grass" will have very different qualities depending on how it is looked after. To the right is the turf racetrack, subject to expert maintenance including irrigation, and to the left a grass pathway beside it, with no maintenance.

Maintenance – background

When a grass surface is criticized the background is often insufficient maintenance. In a similar manner as a sandbased arena needs to be prepared over time to offer horses and riders a good surface for competition, a grass arena needs looking after most months of the year, or all year round depending on the

climate. This is valid also if the surface is not used for competition but "only" for training. A grass surface that is correctly maintained year round will be more durable and can better withstand the stresses of for example a competition. It is naive to think you can get a grass arena or surface in good shape in a week before a meeting.

GRASS ARENA OR TRACK – NOT JUST LEAVES OF GRASS

So what does a grass surface consist of? In a similar way that grains of sand are only one ingredient in a sandbased surface, the blade of grass is only one ingredient in a grass surface. This has to be taken into account throughout. A blade of grass is just like a miniature version of a tree, or a bush; a plant with a stem, leaves and roots.

For grass to flourish a guideline is the importance of a combination of:

- 50 pc soil and grass (with roots etc)
- 25 pc water and
- 25 pc air

This can only be achieved through a combination of correct laying down/establishing and correct maintenance. Water and air benefits the root system, and a strong root system in turn promotes surface properties that benefits the horse. The soil and grass is the focus when establishing a grass surface. Air and water (moisture) is the focus for maintenance, apart from regular cutting.

The grass roots

The non-expert looking at a grass surface would not think of the root system, but it is in fact very important for the properties of a grass arena or track. The root system needs

nutrients, water and air, which will be discussed further on in the chapter, in the section about grass maintenance. One aspect of well maintained grass is that the grass surface and the grass roots will contain a lot of air, and therefore will be compressed by the hoof when it hits the ground. This promotes the elasticity and cushioning properties of the surface.

Grass species

There are many grass species, but only a fraction of them are suitable for competition riding surfaces (or a grass lawn). Desirable properties of turf species for equestrianism, and other sports, is to offer stability, drainage, be disease resistant and hardwearing. A main traditional species is ryegrass, also used for agricultural use, for example cattle grazing and feed. Part of developments in sports turf science is producing new (dwarf) rye grass strains adapted for sport surfaces. Kentucky Bluegrass is another species that has been used for sports turf. In Scandinavia different seed companies offer different mixes of bluegrass and ryegrass. One mixture that can be suitable for a riding arena is at 50/50, with a range of 40/60 or 60/40.

Global considerations

Of the commercial grass species many have been bred to be adapted to varying climate and

growth conditions in different countries and regional areas, such as daylight hours, temperature, and precipitation. Therefore, if you visit an arena or track in another part of the world or your own continent you should not automatically look at the grass species used there as something to copy at home. Your choice is restricted to species that are adapted to conditions there. What is most suitable depends on the climate and growth zone in your local area, as that influences grass growth patterns. One example is that different mixes of grass species are more or less sensitive to drought, and it is important to use what fits locally.

In warmer climates, such as in Australia, grass grows all year round and species are divided into "warm vs cool season grass". One resource for advice on the right grass mixture in a particular area are farming advisory organisations.

WATER AND WATER PERMEABILITY

Grass is of course dependent on water for growth, and as for sandbased arenas the moisture content is very important for the properties of a grass surface. Lack of water/irrigation is one of the most common problems for equestrian grass surfaces, especially for competition. The irrigation system and routines often need improvement.

When analysing a grass surface it is very important to assess both access to water for irrigation and need for drainage. An important part of drainage is water permeability, that will be influenced both by the local soil materials and by maintenance. Another point is that an arena with good drainage might become more sensitive to drought and need more irrigation.

Global differences and considerations

Access to water and natural precipitation will be an important factor in the feasibility of having a natural grass surface. In regions with either little or large amounts of precipitation the main, but costly, solution is to build the surface as an allweather, from the bottom up with drainage pipes, stones etc. In 2019, such a track was built in desert conditions at the King Abdulaziz Racetrack in Riyadh, Saudi Arabia, to complement the existing dirttrack. The irrigation water is desalinated water from the Gulf. Building a grass surface from the bottom up is of course also done in Europe with surfaces with high demands, such as Ascot Racecourse, and Hickstead's All England Showjumping Course (see case studies). Such solutions of course demand highly specialized consultants.

MORE IN DEPTH

Water permeability differs between soil types, and that is important to consider when choosing drainage systems. It will also affect how sensitive the land is for ground frost and drought. Water permeability is in turn influenced by soil particle size distribution, mineral content, particle shape, pore volume and water content. One example of a material with high water permeability is gravel. This means that water (for example rain), is drained quickly through gravel, without being stagnant on the surface. In soils with low permeability water will instead drain slowly. Permeability is measured as milimeter per second, even if millimeter per hour is more commonly used. If the rate is 0,1 millimeter per second the material is regarded as selfdraining, while materials with lower rates than 0,001 mikrometer per second are classified as dense. One example; for the equestrian Olympics in London in 2012 the dressage and showjumping sand arena was designed to drain 100 millimeter rain per hour. The figure 0,1 millimeter per second would be equal to 360 millimeter per hour. Water permeability plays a part when you order a soil sample analysis. One measure is "capillarity". It is important to have a value for the capillary action when evaluating the soil in relation to ground frost, determining drainage depth, soil Ph, specific weight etcetra.

AIR (AND DECOMPACTION)


The importance of air in the soil of a grass surface is clear to the expert but an aspect that the average rider is very unaware of. It is as important to the grass and the surface as moisture, and the two interact. Air as well as moisture in the ground will in turn improve surface properties for the horse.

The opposite is soil that has become compacted. Compaction is a constant issue for a riding surface, whether it is sandbased or grass. Each time the hoof hits the ground the force can be the equivalent of up to two tons, and this will of course compact the material underneath. To counteract that is an important part of maintenance, both with grass and sandbased materials.

Effects of compacted soil:

- difficult for both air and water to circulate in the soil
- the lack of oxygen and water makes it more difficult for grass roots to access the nutrients available
- worms will be stifled
- grass roots have difficulties penetrating

The different techniques for aeration and decompaction are described in the maintenance section.

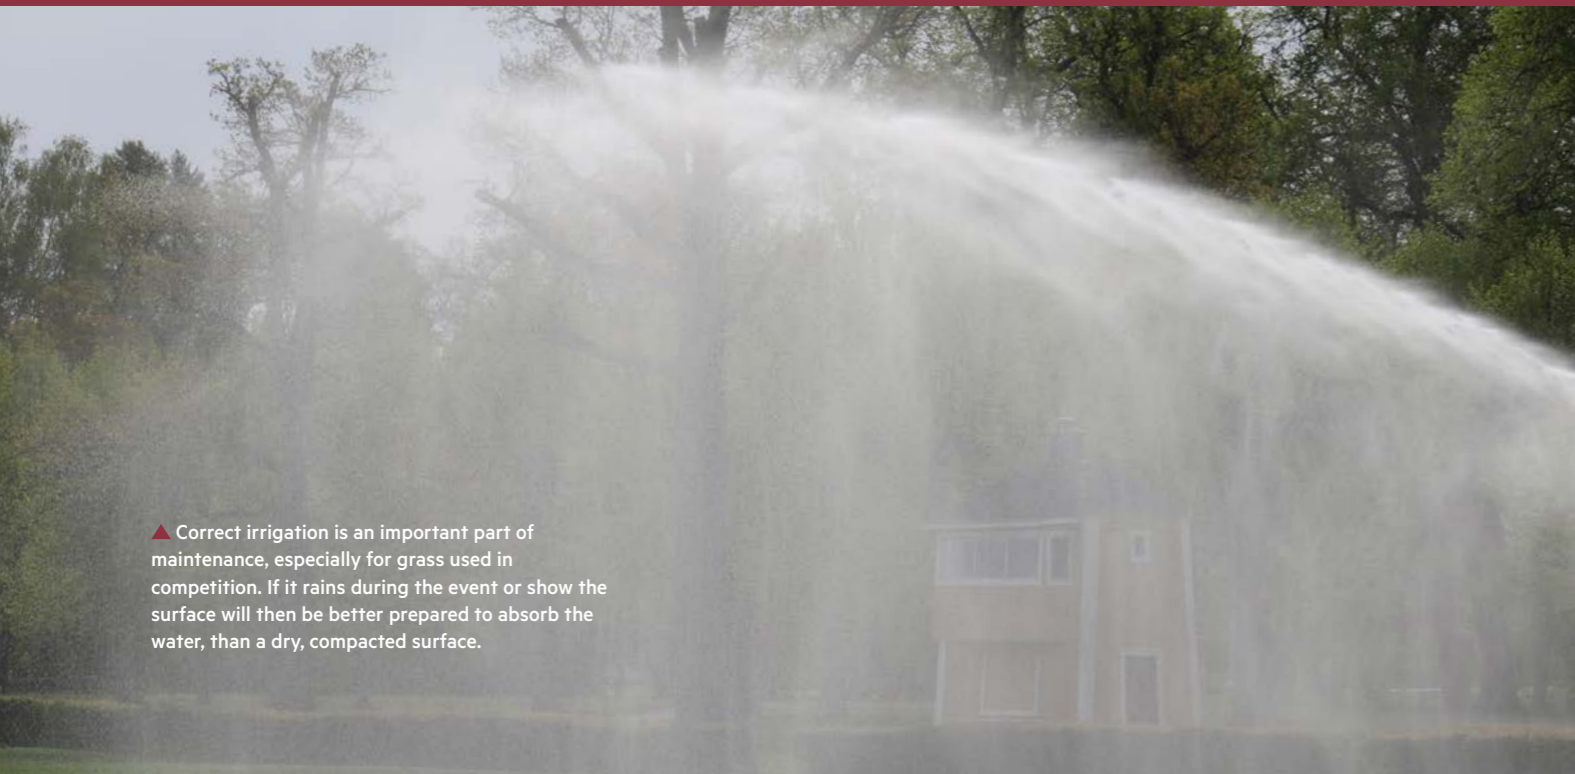

▲ Correct irrigation is an important part of maintenance, especially for grass used in competition. If it rains during the event or show the surface will then be better prepared to absorb the water, than a dry, compacted surface.



LAND AND SOIL

For equestrian grass surfaces a very important factor is what soil type is underneath, and how the soil is managed. Many equestrians are aware that there is a great difference between how a grass surface functions depending on if the grass grows on sandy soil or clay. That is however, as we will see in this chapter, a rough division.

Soil consists of mineral particles; from gravel to sand and mud, depending on the particle size, additional organic material and the air and water that circulate in very fine spaces between these solid materials. We must also not forget the live component in soil, which is worms, bacteria and fungus that help break down organic material and contribute to a fertile soil.

Soil type and its texture will help determine the health of the grass and the surface properties for the horse. Depending on the location soil will contain minerals and micro substances which will affect the properties. The elasticity of a grass surface is supported by friction between micro particles in the soil and organic material such as grass roots. A soil with a high fraction of organic material will have a shock dampening effect, as it can deform and therefore is more elastic.

One step when putting down or aiming to improve a grass surface is to get a soil analysis. This is similar to when analysing sand for a sand arena. Also, just like when putting down

a sand arena, properties of the soil and ground can be compensated by the right foundation work and by maintenance, but different conditions will then also put different demands on the budget and workload. Depending on the soil type a grass arena will be more or less water dependent and be more or less susceptible to become slippery or hard.

The different soil types

Soils vary enormously in characteristics, but the size of the particles that make up a soil defines its characteristics:

- Clay: less than 0.002mm
- Silt: 0.002-0.05mm
- Sand: 0.05-2mm
- Stones: bigger than 2mm in size
- Chalky soils also contain calcium carbonate or lime

The dominating particle size gives soil its characteristics and because the tiny clay particles have a huge surface area for a given volume of clay they dominate the other particles:

- Clay soils have over 25 percent clay. Also known as heavy soils, these are potentially fertile as they hold nutrients bound to the clay minerals in the soil. But they also hold a high proportion of water due to the capillary attraction of the tiny spaces between the numerous clay particles. They

drain slowly and take longer to warm up in spring than sandy soils. Clay soils are easily compacted when trodden on while wet and they bake hard in summer, often cracking noticeably. These soils often test you to the limits, but when managed properly with cultivation and plant choice, can be very rewarding to work with

- Sandy soils have high proportion of sand and little clay. Also known as light soils, these soils drain quickly after rain or watering, are easy to cultivate and work. They warm up more quickly in spring than clay soils. But on the downside, they dry out quickly and are low in plant nutrients, which are quickly washed out by rain. Sandy soils are often very acidic
- Silt soils, comprised mainly of intermediate sized particles, are fertile, fairly well drained and hold more moisture than sandy soils, but are easily compacted
- Loams are comprised of a mixture of clay, sand and silt that avoid the extremes of clay or sandy soils and are fertile, well-drained and easily worked. They can be clay-loam or sandy-loam depending on their predominant composition and cultivation characteristics
- Peat soils are mainly organic matter and are usually very fertile and hold much moisture. They are seldom found in gardens

- Chalky or lime-rich soils may be light or heavy but are largely made up of calcium carbonate and are very alkaline

Where building or landscaping has mixed up different soils, it can be very difficult to tell what type of soil you have, and it may change markedly over a short distance.

FOR BEGINNERS – IDENTIFYING YOUR SOIL TYPE

If you have no previous experience of soils a simple way of finding out what type of soil you have is by touching it and rolling it in your hands. Please note that this is only a very simple test and must be complemented by a professional laboratory analysis:

- **Sandy soil** has a gritty element – you can feel sand grains within it, and it falls through your fingers. It cannot be rolled to make a sausage shape. If it is not a coarse sand and perhaps a sandy loam it may stick together better
- **Clay soil** has a smearing quality, and is sticky when wet. It is easily rolled into a long thin sausage and can be smoothed to a shiny finish by rubbing with a finger. If it is not a heavy clay it won't get quite as shiny and be as easy to make a sausage
- **Pure silt soils** are rare, especially in gardens. They have a slightly soapy, slippery texture, and do not clump easily

If soil froths when placed in a jar of vinegar, then it contains free calcium carbonate (chalk) or limestone and is lime rich.

Another important aspect of soil type, is the pH (acidity or alkalinity). This will also affect the type of plants you can grow and how you manage your soil.



▲ A soil sample from the international arena at Falsterbo in Sweden.

Photo: Cecilia Lönnell

WORKING WITH YOUR SOIL

Once you know what type of soil you have, you can start to work with it and improve it.

Clay soils

Clay soils are rich in nutrients and very fertile if their cloddiness can be broken up by the addition of organic matter. This breaks down the clay into separate crumbs, making the water and nutrients held within the clay more easily available to plant roots. Breaking up the clay into crumbs also makes the soil warmer, more easily workable and less prone to compaction.

Sandy soils

These light soils are usually low in nutrients, and lose water very quickly being particularly free-draining. You can boost the water and nutrient holding capacity of your soil by adding plenty of organic matter to bind the loose sand into more fertile crumbs. Fertilisers may also be necessary to give plants grown in sandy soils an extra boost.

Silt soils

These soils are made up of fine particles that can be easily compacted by treading and use of maintenance machinery. They are prone to washing away and wind erosion if left exposed to the elements without plant cover. However, they contain more nutrients than

sandy soils and hold more water, so tend to be quite fertile. You can bind the silt particles into more stable crumbs by the addition of organic matter.

Loams

These offer excellent growth conditions, being a 'perfect' balance of all soil particle types. But even though they are very good soils, it is important to regularly add organic matter, especially if you are digging or cultivating these soils every year.

Chalky soils

Chalky soils are alkaline, so will not support ericaceous plants that need acid soil conditions. Very chalky soils may contain lumps of visible chalky white stone. Such soils cannot be acidified, and it is better to choose plants that will thrive in alkaline conditions. Many chalky soils are shallow, free-draining and low in fertility, but variations exist, and where there is clay present, nutrient levels may be higher and the water holding capacity greater.



ADVICE ABOUT SOIL SAMPLES

The soil type can vary within a quite small area of land. When you take soil samples in preparation for a grass arena or track, whether it will be constructed from scratch or you are improving an existing grass surface, it is very important that the sampling is made correctly.

MORE IN DEPTH

By soil is meant the loose deposits found on top of bedrock. The soil consists of three layers – topsoil, subsoil and substratum. The topsoil processed by man often form a sharp border against the subsoil. The subsoil is the original soil, that has not been processed by agricultural machinery. It is harder, but some grassroots penetrate down into the subsoil to get nutrients and water. The subsoil gradually makes a transition into the substratum, which is so solid that no grassroots can penetrate. The topsoil is where grass grows and that you send samples from for analysis.

In expert language soil includes rock aggregates, what the non-expert calls sand and gravel. Experts talk about mineral soils and organic soils. Organic soils contain material from decomposed plants and other living matter. One definition of organic soil is if it contains a minimum of 20 weight percent of organic material. Common mineral soils in Northern Europe are sand, gravel and moraine (with remnants from the ice age). Common organic soils in Northern Europe are peat and clay.

The particle size determines the soil name
Just as with sand described in Chapter 5 soil is classified by their particle size and its distribution. The soil's capacity to drain, absorb or retain water is primarily determined by the particle size, and how densely

they are packed. A rule of thumb is that the smaller the particle, the poorer the permeability or draining capacity. The composition of mineral soils vary, and they are divided into different soil types depending on particle size and distribution. Normally a soil consist of several fractions (clay, silt, sand, gravel, and stones). In the soil type "silty sand" sand is the major component and silt the second largest. You also classify mineral soils by their texture (plasticity) and how sensitive they are to ground frost.

As seen above, for grass growth the other soil factors to analyse apart from the ph-value are:

- The particle size distribution of the soil
- The structure – do they aggregate like in clay?
- The density – how packed is the soil?
- Mineral content – what nutrients does it contain?
- Organic material– so for example decayed plant material as opposed to pure minerals?
- Depth? How deep is the topsoil? The top soil can be only a thin layer on top of the bedrock, or some half meter deep.

SO YOU WANT (TO USE) A GRASS ARENA OR TRACK?

The question to ask when planning or renovating a grass arena or surface is:

- What do we have now ?
- What do we want ?

Is it part of your pasture, an agricultural field or old parkland turf?

Is it an field or track/gallop already used for riding, but that can do with improvement?

One starting point is; can you see the soil beneath the grass? Then the grass cover is too thin. Turf should be dense, like a quality carpet.

There are differences in the effort required, depending on the intended use of the grass. This influences management and maintenance demands, as they in turn influence properties of the surface. One rule of thumb is that "speed kills", so that the faster you intend to ride (or the higher the jumps) the higher the demands of the properties of the grass surface is. When using grass it is very important to consider what is underlined elsewhere in the FEI guide; that the properties of a surface (so also its effect on the horse) will vary depending of for example moisture content, and adapt your riding accordingly.

The main criteria for surface properties affecting the horse and its performance are:
Impact firmness – Cushioning – Responsiveness – Grip – Uniformity and consistency

(for more in depth information about surface properties please look at Chapter 4 in this guide, from page 38).

Do you plan to do canter work or jump, either for crosscountry training or showjumping practice?

Then a surface that is uniform, and offers a good degree of grip, cushioning, responsiveness, with not too high impact firmness, is required.

Do you plan to use a grass surface for light hacking or warmup?

All criteria is then still desirable at their "right" level, but not as vital.

Two important aspects are also:
Private or competition/event use?

1. The expected intensity of use. If you have a few horses and a large surface (numbers of thousand square meters) the demands will be lower than if you will be riding more horses in a smaller area? (One chief guideline is also that a small grass arena is difficult to manage at all).
2. If the surface needs to be ready for use on a particular day, as a competition site, or if it is at home, and you can adjust the use to weather conditions? A grass surface that is used in wet weather and not mana-

ged well will become choppy and uneven, the opposite to the uniformity required of a good surface. One main advice for grass use outside competition venues is to abstain from use when the ground is wet and the surface is easily damaged.

3. If you are a show organizer, to you have full control of the land and can access it for maintenance all year round, or do you have access only in connection with the event?

There are two options to access good grass for riding:

1. **Develop an existing grass surface, for example a grazing field/pasture.**
To develop an existing grass surface, such as a field or paddock, to function as well as possible for regular riding, you have to analyse the need for preparation and do work that equals maintenance including renovations.
2. **Prepare from scratch:** to construct a grass arena for optimum use the same principles apply for the bottom layers of a sand based arena as in Chapter 8 of this FEI surface guide, with good drainage and irrigation as key elements. The deciding difference between a sand-based versus grass surface is obviously then the top layer, with for grass the seedbed. For a grass surface the ingredients needed for the top layer are soil, sand, grass seed (or ready turf), irrigation, liming and fertilising.


Your course of action will also be governed by economy, time and local conditions. Whether a new surface is being put down or a maintenance plan is needed for an existing one it requires an analysis of the soil type, water/precipitation etc. The soil analysis can also be used to determine the choice of fertiliser.

Analysing the conditions:

For the best possible conditions at the event as many as possible should be considered:

- a) **Where?** This is important. On low ground drainage can be more challenging. A sunny, high position instead can be prone to drying out. In general using higher ground is recommended.
- b) **Order a soil analysis.** Different soils give different conditions and challenges, but they can all be addressed. As for a sand arena the subsoil might need work. Soil samples can be sent to a commercial laboratory. Results will include the ph-value of the soil. This of course puts a number to how acidic or alkaline the soil is, which in turn will influence the health of the grass. Ph is measured on a scale from 1 to 14, but if your soil values are at either end of the scale you can probably not grow anything!
- c) **Groundwork;** Is there sufficient drainage? Correct drainage is paramount for a uniform surface. Again analyse the needs. A well drained area will be more dependent on irrigation.

▼ Ryegrasses and Kentucky Bluegrass species are hardwearing and common in seed mixes for sports turf, for example soccer but also equestrian arenas.

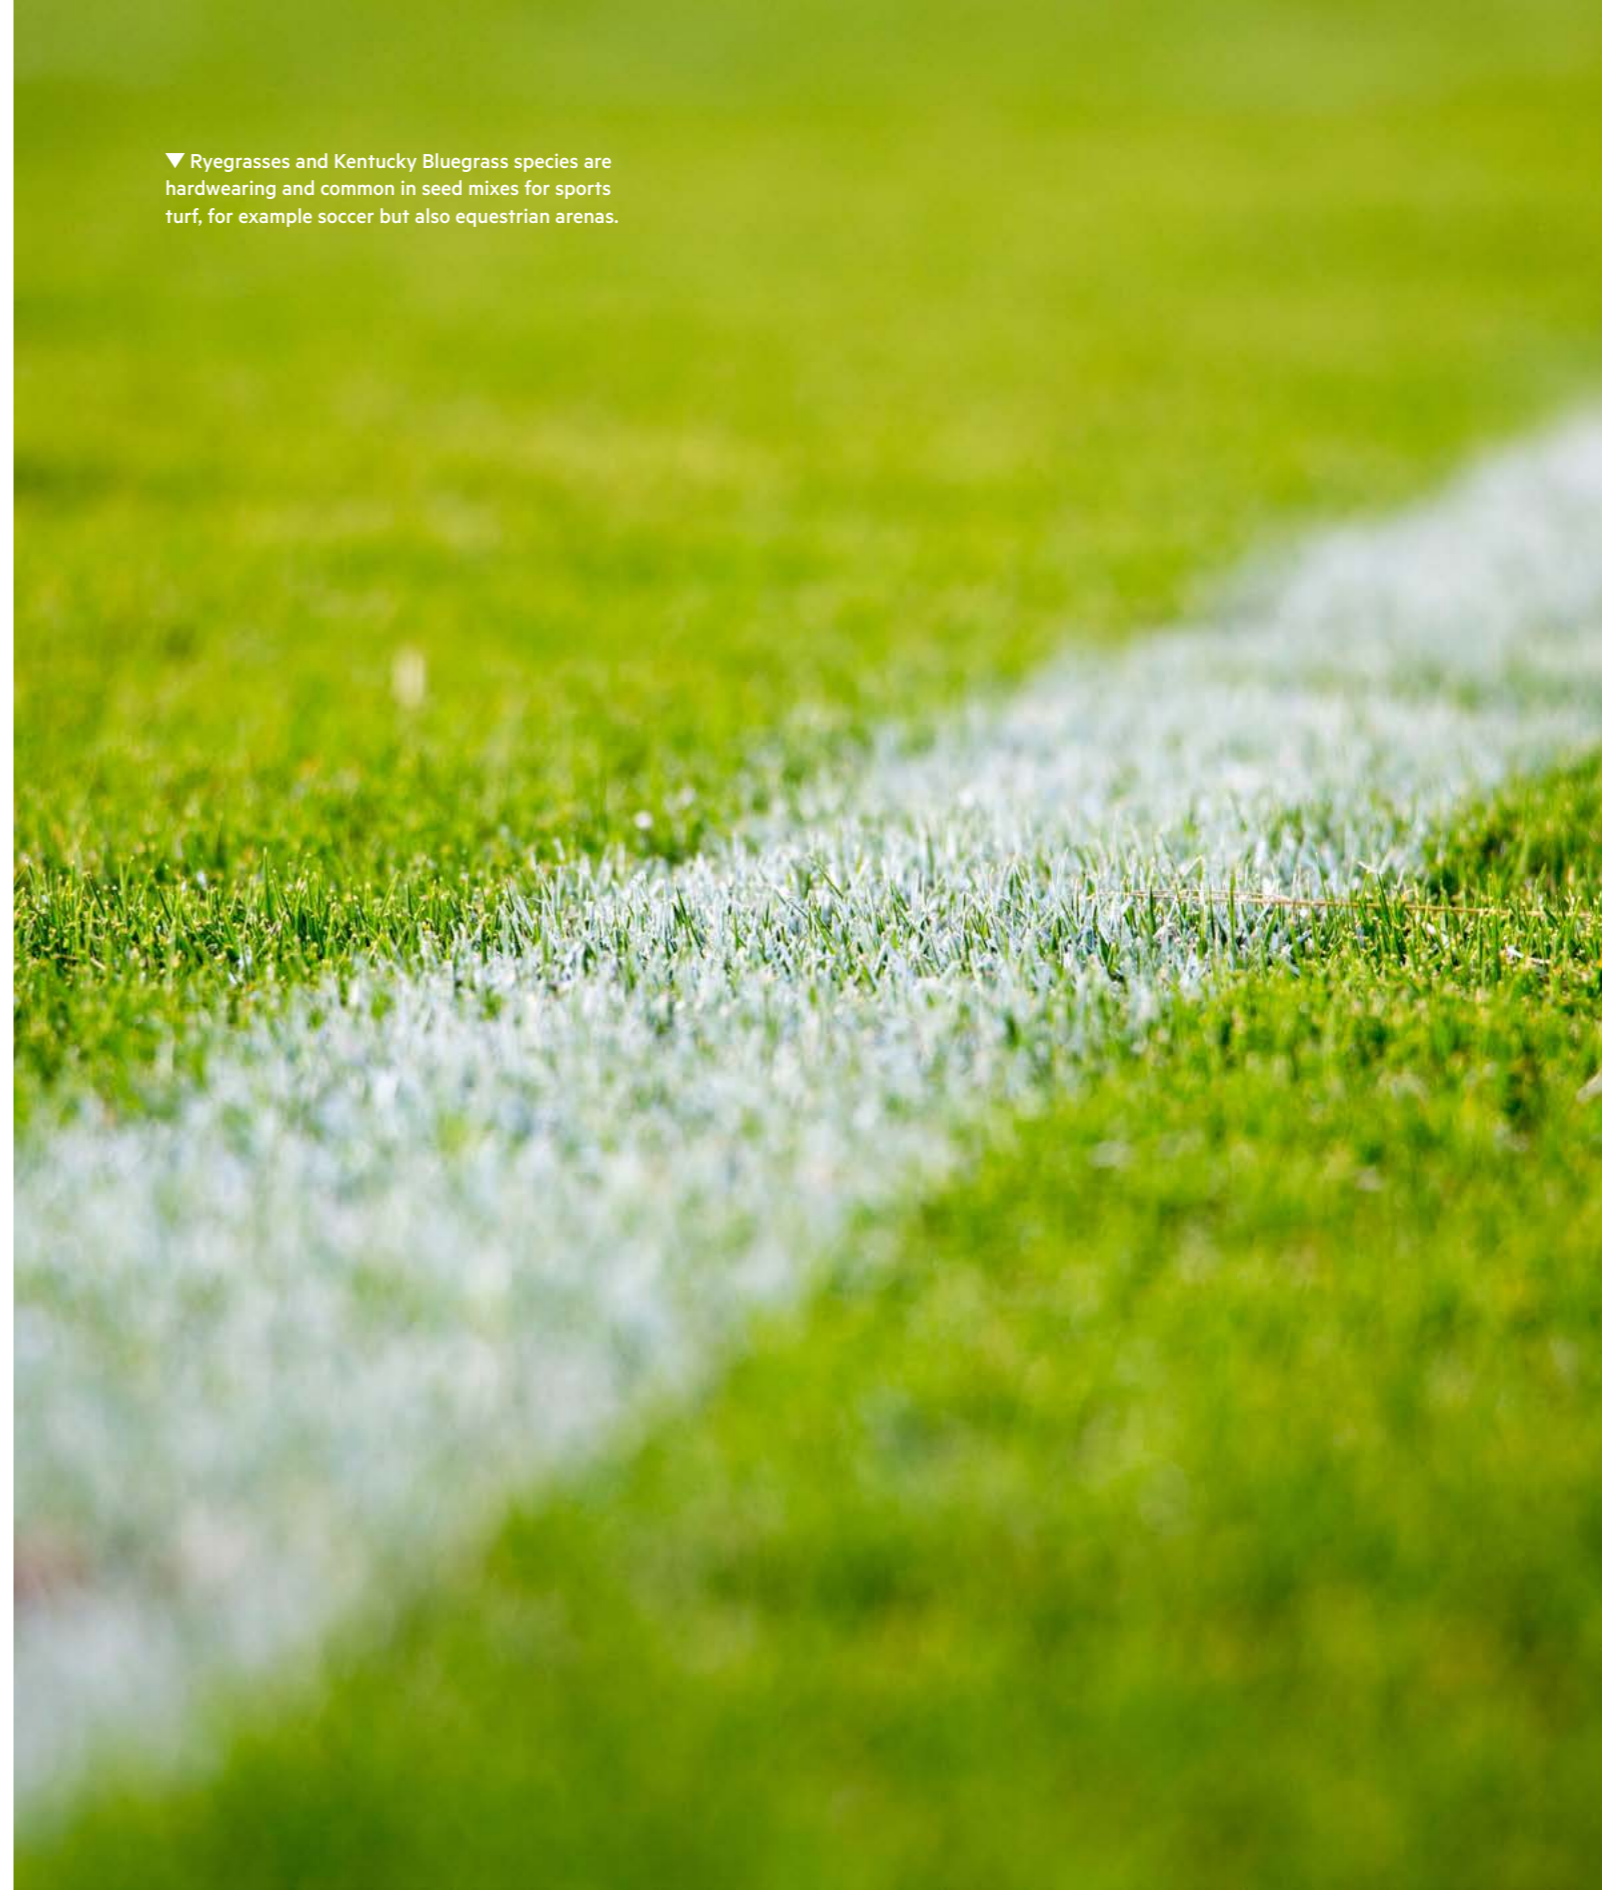

Getting the grass surface carries three options:

a) Sow grass seeds.

b) Put down ready turf (that is that has been commercially grown elsewhere, cut loose, rolled for transport and rolled out at your site, and then has to get established).

Pro: quickly provides what looks like a ready surface

Drawback: higher cost, and demands extra care with irrigation for the root system to take hold. It is also important to consider when making an order that turf that has grown on clay soil is not adapted to grow on other soil types, and the other way round.

There are companies that sell "washed" ready turf, that lacks that sensitivity but is also more expensive.

c) Improve an existing grass surface, for example a grazing paddock. That is more feasible for training at home than achieving a competition arena. This will entail maintenance and renovation input (reseeding, aeration, fertilising). Improved drainage might be recommended.

One first step suggestion is to borrow or rent a grazing harrow with tractor, and use it to rake old grass. The alternative is a vertical shearer, which also helps to take out old grass.

Consistency, so uniformity of a surface, is a key factor for horse safety.

**Simon Claisse and Andrew Tulloch,
Clerks of the Course and former CoC respectively
at Cheltenham and Aintree, England.**

MORE IN DEPTH

There is a strong awareness in Thoroughbred horse racing, based on hundreds of years of experience, that the same course will change surface properties ("going") depending for example on rain/moisture, and then be softer or harder. In English speaking countries with racing on grass the status of the track or "going" is checked before each raceday. The scale goes from "firm" via "good" to "soft". The state of the going is closely associated with moisture/rain, but will also be influenced by the type of soil. "Good" does not stand for "good" in the literal sense, but "about right". With modern irrigation systems and maintenance racecourses can to a certain extent determine the going by maintenance. The trend today in UK horse racing is to aim for slow good ground for jumping and fast good ground for the flat.

For many years the state of the "going" was tested with the aid of a simple stick with a sharp tip in the end, that the clerk of the course sticks into the ground. How easy it penetrates the surface determines the rate of going. In recent years this stick has been modernized with more sensitive technology. Another type of simple test equipment is called a penetrometer. It involves a small weight being dropped (in a controlled manner) onto the course and giving a reading for the surfaces hardness/firmness. A going stick only works on grass surfaces, but a penetrometer can also be used on sandbased surfaces.



SUSTAINABILITY ASPECTS

One aspect of grass is environmental. The natural sand which is the first choice for equestrian sand-based surfaces is a finite resource, while grass is of course very renewable. In northern Europe, and other parts of the world, a sand (and/or indoor) arena is needed for parts of the year, but a grass surface can be an alternative to an outdoor arena 2 or 3.

MAINTENANCE

As for sandbased arenas correct, continuous maintenance is the key to a good grass surface. The maintenance plan should cover the whole year, and take into account at what time points the surface should be at its optimum, for example for a show.

Grass management is very much about soil management; the right maintenance will improve soil texture and this in turn promotes grass growth and surface properties.

MAINTENANCE ANALYSIS

As for sandbased arenas correct, continuous maintenance is the key to a good grass surface; enough moisture, correct grass cutting, soil decompaction, fertilising plus dressing and repairs are key elements.

Cutting

The simplest way to improve a grass surface is more frequent and planned cutting (mowing).

If the budget is very limited, regular cutting of the grass is in itself a viable option for improving the turf surface.

The preferred height for competitions varies with the discipline;

- about 25-30 mm for showjumping (on the day of competition there should not be a lot of grass between the soil and the hoof).
- about 75-100 mm for crosscountry (and racing)

Before and after major events the height can be higher. (Please also see case studies at the end).

SOME IMPORTANT GRASS CUTTING ADVICE:

- Consider the growth season, when does the grass start growing and when does it end? (The temperature in the ground determines grass growth, that starts at about 5-7 degrees. There are small electronic earth thermometers to determine this. Depending on the climatic zone grass growth can end in September, or continue well into winter).
- Cut a bit higher early in the season.
- Cut regularly, preferably two-three times a week. Cut during the whole growth period to get a thick, strong grass cover.

COMMON MISTAKES IN GRASS CUTTING ARE:

- Cutting more than one third of the grass in one session.
- Cutting in only one direction.
- Letting the grass cuttings stay on top. They hinder grass growth, and will make the ground slippery if close to competition.
- Not cutting often enough. A lot of events only cut once or twice before the competition.
- Not cutting in the autumn, before winter. If the grass is allowed to grow to around 150 mm that is too long, it will wither in winter, and be on top of the other grass which will die. If the grass is instead cut in the autumn it will grow much better in the spring.

Does it become compacted?

For equestrian surfaces one important aspect

of maintenance is decompaction of the soil. When a horse moves on the ground the result is massive forces that compact the soil; reducing the dampening effect and increasing impact firmness. Compaction is also caused by vehicle traffic, and even pedestrians. With less air in the soil there is less space for moisture to penetrate, and the same for grass roots. Decompaction through aeration is therefore very important. With aeration ground properties will improve, and conditions for grass growth too. Decompaction aids healthy grass with deep roots.

COMMON MISTAKE: Rolling the arena without decompaction later, as it will compact and seal the ground. If horses have been jumping big fences and you then water and roll the ground will get very compacted, and that must be addressed by aeration afterwards.

Aeration

Aeration involves perforating the soil to allow air, water and nutrients to penetrate to the grass roots. It is a vital part of grass maintenance and a vital part of decompaction of the ground. In simple terms it is similar to harrowing and deep harrowing of a sand arena. Aeration is interlinked with watering, or how the ground handles rain. With aeration the roots get healthier, and stronger grass roots in turn help hold the turf together.

RAKING-SLITTING

Removing old, dead grass, "thatch" is an im-

MORE IN DEPTH

While several scientific studies have shown that grass racecourses have a lower injury risk than commercial sand surfaces there are also studies showing associations between the going (so surface properties) on the day and risk of severe injury in races. It concerns both fractures and tendon/suspensory ligament injury. A large British study about catastrophic front leg fractures in races also showed that course maintenance and days since the last previous race (so intensity of use) also influenced the risk. Fewer days since the last previous race day increased the risk of catastrophic fracture.

portant part of both renovations and maintenance. It is important to remove the dead material which is right above the grass roots. Grass is affected by dead material, and it can prevent water from penetrating the ground. It is the same principle as when raking a garden lawn in the spring. There are grass slitters and grass spinning discs.

SUBSOILING-DECOMPACTION

The machinery is described further down, but in short subsoiling involves perforating the soil with sharp spikes pushed into the ground. One version is called vertidrain, that push 200-450 millimeter long spikes into the ground. It gives a heaving effect, breaking the pan of hardened ground and allowing air and rain into the ground. When deeper levels are affected it is called subsoiling. The most efficient for decompaction of hard areas is using a so called hollow cone. It takes out a "tube" of soil, leaving a hole where the surrounding soil collapses into. This of course needs to be done well ahead of a show or event.

Aeration can also be used in dry weather when cracks appear on the surface.

Watering

Does it need irrigation/get enough rain?

You might say "we do not need to water, it will be raining on Sunday". But weather reports can be unreliable, and with large local variations. Regular irrigation is recommended, but can be

adjusted based on how the arena is used.

Watering/irrigation is a skill that demands experience. There are few aids to determine how much moisture a surface needs.

ADVICE:

- If the surface is not being used a period of some drought can promote root growth.
- At the same time some diseases, such as "rust", thrives in dry conditions
- Overwatering in turn "drowns" the grass, and can also promote unwanted species of grass.

WATER USE SOLUTIONS:

- One solution to recycle water, including from rain and drainage.
- Or using "wetting agent", which affects the surface tension of the water so that it penetrates the ground more easily.

Fertiliser

In the past fertilisers equalled agricultural use. The main substances are nitrogen-phosphorus-potassium, but the field has broadened with the development of sports turf science. There are for example "slow release" and "short release" fertilisers. Soil samples are an aid in deciding the nutritional needs of grass in a particular area. Leakage of nitrogen can be an environmental concern, but tests on golf courses indicate that nitrogen is processed by the grass and not leaked.

Water as a resource is a challenge, for a large surface you must have a watercourse or borehole. We need environmental permission anyway, and it is getting more difficult to get. Whatever volume of use is agreed with the Environment Agency will in future likely be limited to removal from the watercourse in the winter months, necessitating a water storage capacity equal to the volume of annual use. In about 30-40 years or as early as 2030 the water need of the UK will surpass the water available.

Simon Claisse, Clerk of the Course, Cheltenham

Dressing and repairs

SPOT REPAIRS

Counteracting the effect of the hoof on the ground is an area of grass maintenance particular to horse sports. One effect of the hoof is compaction, as discussed above. The other is of course surface damage. This effect will of course increase with wet weather, so at home a main factor is to use a grass surface less, or not at all, in such conditions.

GRASS CLOUDS

If the hoof tears out a clod of grass it should be put back in place as soon as possible, with the grass on top. Then it will regrow, or else the surface will become bumpy and less even, resulting in a serious worsening of surface properties. At the Falsterbo Horse Show CSIO***** part of the arena crew's jobs are being at hand at at every fence to replace any clod when a horse has passed. At Cheltenham Racecourse in England 45-50 groundsmen are at hand during all race days to do repairs, with a similar number employed in the two days immediately after racing to ensure the track is reinstated within 48 hours of the damage being done, (a requirement of the racing authority).

HOOF PRINTS

Are also important to address, to maintain a uniform surface. Two versions are:

- Mix soil and sand (75-25) and fill the hoofprint with, rake it in and light rolling.
- Mix soil and grass seeds and fill in, roll lightly.

Weeds and bugs

Keeping grass well maintained helps keeping out weeds, but some herbicides can be necessary.

As for water resources environmental concerns are resulting in growing restrictions in products against weeds and bugs.



IS THE MICROFLORA HEALTHY?

Soil structure and fertility is affected by microorganism, the so-called microflora. Millions of microorganisms live and reproduce in a few grams of topsoil. Decompaction is one factor that promotes the microflora.



Photo: iStock

TAKE HOME MESSAGE – EXPERIENCES FROM RACING

From Andrew Tulloch, former Clerk of the Course Aintree Racecourse and Mark Aynsley, Head Groundsman, Aintree Racecourse.

- Consistency (of the surface properties) is important
- Fifteen-twenty years ago racecourse turf was more agricultural; you grew grass and cut it. Now it is much more scientific, and there is more understanding that grass is not just what you see on the surface but also what is underneath, the soil.
- Other changes in racing are that there more emphasis on the surface, for welfare reasons, and that we aim for slower, softer going. Before it was good to firm, now it has been eased to good to soft, also in flat racing. This means slower speeds, and more damage in the ground so more to restore, but it is but better for the horses.
- Number one for anyone in charge of grass management is the soil, looking at how you are looking after the soil; Water? Drainage? Decompaction? The soil microflora.

MACHINERY

Just as for sandbased surfaces, grass maintenance requires the right machinery. The result will also benefit from the person in charge being experienced or getting good experience.

A grass mower and irrigation equipment is vital for anyone looking after a grass surface for riding. A tractor is necessary for a lot of other regular maintenance.

Grass mower

There are different types of grass mowers; rotary, cylinder or reel, and multiclip. With the rotary mower the blade 'chops' the grass on impact due to its very high speed. These mowers work best on a medium to high cut. A cylinder mower is better for short grass, at 15-30 millimeter, as for showjumping.

Aeration

Turf aeration machines can be adjusted with different tines and holders, depending on the depth etc required.

TWO VERSION ARE:

1. a Verti-drainer, which inserts equally spaced holes in the turf, using tines at different depths, down to some 45 centimeters
2. Hollow coring devices, which take out wider diameter cuts of ground.

Top dresser (for dispersing sand)

Is a tractor-pulled machine for dispersing sand or other material to improve the grass surface.

Fertilizer spreader

As the name implies equipment to spread fertilizer. There are tractor-pulled agricultural use versions, and smaller, handheld ones for garden or (some) sports field use.



TIP!

For other grass equipment one important tipoff to both show organizers and private equestrian centres/yards is to contact the local sports club that uses a turf surface. It can be the local golf course, and its greenkeeper, or a soccer or rugby club with its groundsman. It might be a source of outsourcing of both machinery and the work, including procedures that might only need to be done a few times per year or annually. Some machinery, such as for seeding, might be needed occasionally. Others, such as vertidrainers and other equipment for aeration, needs to be used more often. Another benefit with sports clubs is their know-how, especially through their greenkeepers or groundsman; that is staff that knows how to operate the machinery. Depending on club policies they can be hired occasionally or contracted.



ATTENTION TO TRACTOR TYRES

In all tractor use, pay attention to the tractor tyres. Just as on a sandbased arena it is important to choose the right tyres, as not to cause unnecessary damage to the surface. Make sure to get so-called turf tyres, and use the right air pressure.



► The the ancient mounted sport of polo requires very quick accelerations and sharp turns on grass fields. In polo the ponies only wear studs on the hind hooves. As in racing the cause of the stud restrictions is the frequent close contact between horses(ponies) where studs would pose an injury risk for the other horse.

STUD USE

After careful consideration the Swedish Equestrian Federation's reference group for equestrian surfaces decided not to offer any specific advice on how to use grass studs, as it needs to be adjusted to the individual horse and the conditions. At the same time noone wants a horse to fall due to poor grip (well maintained grass offers better safety).

There are riders today who believe grass cannot be used for riding and training without stud use, as it does not allow for turns as sharp as on sand, with stronger grip. It should be food for thought to consider practices in other horse sports. In the United Kingdom studs are not allowed in races on turf. That includes demanding steeplechase races such as the Grand National. Instead special racing shoes are used for some extra grip. It could be argued that racetracks do not have the same sharp turns as in showjumping or eventing crosscountry, but the ancient mounted sport of polo requires very quick accelerations and sharp turns on grass fields. In polo the ponies only wear studs on the hind hooves. As in racing the cause of the stud restrictions is the frequent close contact between horses(ponies) where studs would pose an injury risk for the other horse.



For showjumping and eventing there is virtually no scientific research which would help determine which is the "best" use of grass studs:

- The inside of the shoe?
- The outside of the shoe?
- Size of the stud?

One aspect is toe studs-based on experience they increase the risk of heel cuts.

Professor Lars Roepstorff in the reference group has studied high speed images of a very high number of showjumping horses.

His conclusion is that different horses have different stud requirements, due to individual differences in jumping technique and movement patterns. That will in turn influence what type of hold they need. There is a delicate balance between the hoof getting sufficient hold or grip, without getting "stuck". Such "over-studding" is an needless strain on the horses legs. The hoof needs hold or grip both when it first hits the ground, and then in the superficial turf layer, and at takeoff, in the layers beneath the surface.

If you study showjumpers' individual techniques by high speed images you realize

that some horses do "pole jumping", like in athletics. They then use their front legs to get high over the fence. They then need more hold in the front. Other horses rely more on their hindlegs to get power over the fence.

One negative example is if the arena is not uniform, but wet and slippery in some places and drier with better grip in others. Then the rider will need to put studs in to manage the poor areas, but the horse will be "overstudded" in other parts.

Another point to remember is that well maintained, well cut grass is less slippery than the opposite.



CASE STUDY:
**International
eventing:
Burghley Horse
Trials CCI ******

CLERK OF THE COURSE: PHILIP HERBERT

Description: The course runs over natural parkland, so the grass is a mixture of species, some have been growing for hundreds of years. When re-seeding, seed mixes as for racecourses, polo and rugby are used.

The track is fenced off permanently to prevent damage from grazing animals and vehicles. There is approximately 10,000 meters of fencing with over 70 gates.

The soil type is mainly light and shallow, over limestone, there are also some areas of clay either side of the lake. The light soil drains well naturally but the clay soil has had artificial drainage added. Perforated pipes are laid under the ground then covered to the surface with gravel to allow the water to get into them. The different types of soil need different maintenance. The ground with piped drainage needs 'mole' drains added at regular intervals. A tractor drawn implement with a bullet on the bottom of a deep knife is drawn through the ground a right-angles to the drain pipes, this creates a mole type channel,

which helps water in the soil to reach the drains. Deep decompaction of the course is done every 2-4 years using a subsoiler which is similar to the mole drainer but has a 'foot' on the bottom of the leg, shaped to lift the soil and break up compaction. Some areas of the course where the soil is very shallow or adjacent to precious ancient trees, cannot be worked in this way. On these areas a vertidrain or agrivator is used. An agrivator is an implement with tines (spikes) that go into the ground up to 200 mm and when in the ground vibrate from side to side, to shatter the soil without damaging the turf. As there are only up to 70 horses on the course, once a year, compaction is not a great problem.

Burghley has an irrigation system, drawing water from the lake in the middle of the Park. A pressure sensing electric pump sends water through underground pipes to hydrants all over the site. Hose reel irrigators can then be connected to any hydrant, to water up to 370 meters either side of it. It takes about five days to irrigate the whole course and all the practice areas, using three of these machines.

From time to time sections of the route of the course may be altered. If ground that has not been part of the course before is to be incorporated it has extensive work done to it first. If it is clay soil drains are installed. Then the ground is worked with a deep sub-soiler, followed by more shallow aeration from a pasture slitter. Any large humps are removed, hollows are filled in and the area re-seeded. Weeds are sprayed and organic matter such as leaf mould may be spread on the new ground.

Maintenance:

- **WINTER:** None
- **SPRING:** Harrowing, slitting, attending to weeds, start of mowing.
- **SUMMER:** Mowing and if necessary, irrigation. Prior to any irrigation an aerator is run over the ground, this has tines 80 mm long which vibrate from side to side to help them penetrate the ground and loosen it, so that the water soaks in and does not 'run off' or evaporate.

From the start of August the mower, which is a self-propelled machine with seven, independently floating, rotary decks, is raised by about 6mm each week. Aiming to end up at about 80mm grass length. This means that less is cut off the grass each time thus leaving less clippings but the grass still looks mown. A light application of fertiliser is added about 3 weeks before the Event to help the grass to look its absolute best.

At this length the grass has the maximum cushioning effect but when walked on by many sets of human feet will stand up again afterwards. If left longer, when walked on, it will stay lying down. The grass is kept short the rest of the year to prevent the growth of 'creeping bent' a plant which goes brown at the end of the summer and spoils the look of the grass. The final cut of the grass takes place, overnight, on Friday before the day of Cross-country.



Photo: FEI/Liz Gregg



CASE STUDY:

International showjumping – Hickstead CSIO *****, UK

CLERK OF THE COURSE:

EDWARD BUNN, konsultant agronomists visit three times a year. Seven fulltime staff, looking after 40 hectares of grounds.

Situation before:

Main ring: Until 10 years ago we had only the local soil, which is clay. The surface was not an issue then same way as now. If you look at videos from the 70's and 80's

the going sometimes was terrible, but horses and riders were used to it. But with the development of the sport, riders demanded better conditions.

What was done: Ten years ago we put down a completely new arena, like it has been done in Dublin and Aachen. We stripped off the whole ring, and did groundwork as for an allweather arena. Everything 30 cm down

was removed. The top soil was kept aside, the clay underneath was completely removed. A layer of stone was put at the bottom, together with a network of drainage pipes. The old top soil was blended with 5 000 tons of sand, and put back on top. The grass is a ryegrass mix, which gives a deep root system. The roots make a big difference. We have checked and they go 20 cm down. They provide stability.

Secondary rings: In the past we had five grass rings. It was reduced to two, with three made into allweather arenas. The other grass rings have not had the same work underneath. They will handle wet weather, but if the

weather gets really wet during a show the classes can be moved to the allweather rings.

How is it used and maintenance (for several international shows per year, the highlight being the Royal International Horse Show, usually held in July): Whether it is wet or dry weather, the international main arena is now like an allweather grass arena. The soil is now sandbased and there is thorough drainage. In the past in wet weather horses hooves would go 3-4-5 cm into the ground. Now we can get 20 mm of rain and it will be perfect, if anything it gets better with rain.

We do our own tests for surface hardness, have our own clegg hammer.



▲ Part of the 5000 tons of sand laid out on Hicksteads Main International Arena during relaying.

▼ The top soil that had been put aside being relaid.



Photo: Courtesy of Hickstead

General:

- **CUTTING:** During the summer season it is cut three times a week and kept at 25 mm. Off season, in autumn-winter, it is cut every two weeks and at 45-50 mm.
- **DECOMPACTION:** is important. We use a vertidrainer. It works a bit like a garden fork, and breaks the "pan".
- **IRRIGATION:** The arena needs irrigation. We have a network of agricultural irrigation pipes in the main ring. For water we have our own river as part of the land, and can use up to 57 million litres of water a year. To a point it is good if the grass is thirsty, it makes the roots push downward (in search of water).
- **DRESSING:** We sometimes do sand dressing, like on a golf course. We spread about 200-250 tons at a depth of about 1 centimeter. Just as it has been spread

- you only just see the grass, but after two weeks the sand is not visible.
- **FERTILISER:** We use an agricultural type fertiliser, mainly ahead of shows. It makes the grass greener.

During a show: Repairs are made during nighttime, with big holes being forked. Early morning at 5-6 am the arena is rolled (see also point about decompaction).

After a show:

DIRECTLY AFTER A SHOW: Within two days after reseeding is done. A mixture of soil, sand and grass seeds is spread. We have a trick, to soak grass seeds for 2-3 days before spreading, this makes them germinate better. Then we irrigate and fertilise. After three weeks the surface will have been restored.

CASE STUDY:

International showjumping – Falsterbo CSIO *****, Sweden



Photo: Roland Thunholm

CONSULTANT, NOW CLERK OF THE COURSE:

STIG PERSSON, former president of the European Golf Greenkeepers' Association.

Situation before: Falsterbo Horse Show in southernmost Sweden is the country's most traditional show on grass. The land is predominantly seasand. The arena is only used for the show, not during the rest of the year. The arena surface had been criticized, for being uneven. There was also thick "thatch", with old, dead grass. It helps the cushioning effect of the surface, but inhibits grass growth.

What was done: The unevenness could not be rectified by putting more sand on. That would only have intensified the hollows. Instead the entire top surface of the arena was relaid, commencing right after the show in summer 2014. An advanced irrigation system was installed. Starting earlier the same year a second grass arena was added on the showground. Grass was sown in April, and it was ready for use in July.

How is it used:

Maintenance program

(the Show is usually held mid-July):

- **SPRING:** wait until the soil is warm enough for grass growth, at about 5-7 degrees centigrades. Pay attention to weeds. They have broader leaves than grass, and therefore gives less hoof grip.

- **MID SPRING:** start cutting, higher in the beginning. Cut the whole growth period to get a thick and durable grass surface.
- **FURTHER MID SPRING:** fertilising with nitrogen, phosphorus and potassium ("N-P-K"), or nitrogen only, depending on results from the soil analysis, plus aeration, vertical cutting, overseeding
- **LATE SPRING-EARLY SUMMER:** more aeration, possibly dressing with fine sand (fraction 0,2-2,0 mm).
- **EARLY SUMMER:** more aeration, nitrogen fertiliser, mowing twice a week. During the season the arena is mowed more than 40 times and aerified some 20 times.
- **MID SUMMER:** vertical cutting (and more intense preparations for the show) mowing three times a week
- **LATE SUMMER-EARLY AUTUMN:** repeated vertical drainer, fertiliser, mowing twice a week
- **MID AUTUMN:** Vertical drainer, possibly hollow coring, mowing once or twice a week until late October when the growing normally slow down.



▲ Falsterbo Horse Show**** is Scandinavia's most famous and traditional outdoor showjumping event. It has kept with the times by upgrading its grass surface in 2014, and then also added a new, second grass arena.

CASE STUDY:

International eventing: Luhmuhlen Horse Trials CCI****, Germany

CONSULTANT AND COURSE BUILDER: DAVID EVANS

The situation before and what was done:

For a good grass surface you need good turf, air in the ground, drainage and bit of water. Based on experience the best surface for the crosscountry phase in eventing is old turf, often parkland, with a lot of bottom growth. In Luhmuhlen the surface was very sandy, with little bottom grass growth.

At Luhmuhlen we added some top soil, and the right grass species is important. What is right depends on where and in what soil. I judge the soil based on experience.

For grass seeds you can use a sports mix or a paddock mix. One feature of sports grass is that it grows short. I often mix sports grass and a paddock mix at 50/50. If there is a problem I contact a seed specialist. The next important step is aeration, to get air into the ground. When a horse is galloping it is important that the ground "moves". With good grass and air in it, it will move. One aim is to hear as little as possible when a horse goes past. You do not want to hear a "dead" sound when the hoof hits the ground. Some machines will break up the ground on top, and that will help absorb the horses load, but that does not give dampening deeper down.

As we do parks, we are not allowed artificial fertiliser, and instead use a seaweed product. It is natural, and works very well.

Situation now, and maintenance (event usually held first part of June):

- **EARLY SPRING:** harrowing-rolling, get dead grass out
- Regular cutting, the most important part of grass management. For a cross country track the grass should be too short but about 75-100 mm, otherwise it becomes more slippery. Two points about longer grass; in wet conditions it helps keep the surface intact, if dry and warm it helps with surface dampening.
- For Luhmuhlen, if it is a dry spring we do vertidrainning 4-5 weeks before the event
- Then watering
- Then working "by ear" week by week, until the event.
- **AFTER THE EVENT:**
- **EARLY SUMMER:** Soil and sand into all hoofprints, mix of 75 pc sand-25 pc soil, raked in, light rolling.



CASE STUDY:

Dressage – home training – Tullstorp Dressage Stables, Sweden

OWNER: JAN BRINK



Sweden's multiple European Championship medallist Jan Brink has 7000 square meters of grass that is maintained for riding and used in everyday training. The aim is both to get variation in the surfaces the horses train on, and to give both horse and rider more mental stimulation from not working in the same place every day. The grass field is away from the yard, and reached on paths through some woodland.

Situation before: Tullstorp's grass arena is in a shallow valley, with soil that is fertile and contains a lot of humus. It is probably a former lakebed, with no loose stones (in

a region with otherwise very stony ground). The land used to be a large grazing paddock, but was always wet and boggy.

What was done: The land was drained, and a pond dug in the centre of the former paddock, collecting drainage and rain water. Around the perimeter of the field a sand gallop was built, that is also used in the dressage horse training.

How is it used: The grass field is used about ten months per year if the winter is mild, until November-December and from March. The exception is weather with heavy rain, to avoid surface damage. Due to the closeness of the water in the pond it does not either dry out.

The yard does not use studs on the horses when riding on the grass.

Maintenance program

The field is not intensely used, and there is no vehicle or people traffic except for maintenance.

- Cutting. Grass is kept relatively short. If it grows longer horses tend to trip.
- The grass is regularly "dressed" with fine sand, which is repeated at regular intervals. The sand used is fine, washed sand, with the fraction of 0,2-2,0 mm.
- Fertiliser, for grass growth and to get it thick. Done once in the spring and once in the autumn. One observation is that the fertiliser promotes grass growth and stifles moss



▲ Closeup of the sandtrack for training surrounding the Tullstorp grass training area.



▲ Part of the 7000 square meters of grass training surface at Tullstorp International Dressage Stables. The grass gets regular top dressing with fine, washed sand (0,2-2 mm).



▲ A riding path of mowed grass.

CASE STUDY:

Showjumping – home training Grevlunda, Fredricson Showjumping, Sweden

OWNER: PEDER FREDRICSON AND LISEN BRATT FREDRICSON



Foto: Jennifer Söderlund/Friends

Sweden's Olympic gold medallist, former European Showjumping Champion and triple Olympic silver medallist Peder Fredricson and his wife Lisen, former Olympic veteran in 2018, established a grass field of some 1,5 hectares grass (equivalent of two

soccer fields) for riding to use in everyday training. The aim is both to get variation in the surfaces the horses train on, and improve the yard's facilities for canter training. The grass field is away and uphill from the yard, and reached on a grass track past forest and some fruit orchards. The grass field is a second step in the yard's aim to offer the horses more varied training stimulus outdoors, and not just in an arena. Previously the Fredricsons turned a small beechwood copse into an outdoor forest training area, with an undulating allweather track winding among the trees.

Situation before: Grevlunda's grass training field was previously one of many orchards on the farm (the local area is famous for fruit growing). When the Fredricson's bought Grevlunda the trees in this particular field were uprooted, and after restoration the land was used for haylage. After the Fredricsons' decided to outsource the farmwork and buy all the yard's haylage the field was unused for some years, until Peder thought of turning it into a training field.

What was done: The main work was to locate and remove all stones in the ground, and locate and fill in any holes. This was done by



▲ Peder Fredricson's two hectares grass training field is a former orchard, and is approached riding through apple and pear orchards.



Photo: RideNews/Charina Hansson

Peder himself, his youngest son Bill, and yard staff. In joint sessions Peder and the staff took a break from riding and stable work to spend one hour at a time at searching for stones, and marking any holes with a red flag, for filling in later. After the first year of use the field was damaged by a herd of wild boar, and a wild boar fence was built around the whole perimeter for protection. To avoid opening of gates from horseback a small cross country type fence was built as an entrance to the field (there is also a standard gate).

How is it used: The grass field is used from April to November, by only the riders of the yard. During the first two years the work has been either general flat work, and/or canter work. The faster canter/gallop work is done elsewhere on the farm, on a stretch of grass a few meters wide and on a slight incline, next to the yards's entrance drive. This field has been used to let the horses canter freely, and without frequent turns. Peder's and Lisen's view is that with less friction for the hoof than in a fibre or wax sand surface, grass is a more gentle surface, and that avoiding frequent turning is also less hardwearing on the horse's legs. Attention is however paid to the current going; in dry weather with a harder surface, canter work has been avoided. For the outdoor season of 2021 the space on the two hectares field will be used to create three different "zones", with different uses

and maintenance. The perimeter of the field will have a path about 7 meters wide, and one area will be a showground-like surface of about 90x60 (5400 square meters), for more intense training. The perimeter path and the arena like area will have a new preparation and maintenance program, including plans for watering. The remainder of the field will have less thorough maintenance and be used for light riding and work.

Maintenance program

During the first two seasons in use the field was cut regularly, but had no other maintenance (except surveillance for stones and hollows). At the end of the 2020 season Peder Fredricson consulted the Falsterbo CSIO Clerk of the Course Stig Persson to analyse the field. The first new measure was aeration of the ground during autumn. During 2021 the grass of the new perimeter path and 5400 square meter arena surface will be strengthened with the aid of a fertiliser and more frequent cutting. Peder will have assistance from the local Österlen Golf Club. During the first two years there was no watering, due to the distance from the yard and the size of the field. The analysis showed there is water available more nearby, and the new maintenance plan include plans to irrigate the arena like surface. It will then have properties similar to that of a showground.

CASE STUDY:

Equestrian centre with national showjumping shows – Central Sweden



CONSULTANT: STIG PERSSON

Situation before and what was done: The arena soil contains a lot of clay, is challenging to drain, and before renovations had poor irrigation. Is there access to surface water? This site had that, and it was put to use. A soil analysis showed that the soil pH was low in spring. This needed addressing, as a low pH is bad for grass growth. A suitable soil pH is 6-7. The arena also had a lot of thatch, that needed removing. There was no maintenance plan.

Situation now: Maintenance plan in place and reviews of the surface much improved. The same type of maintenance plan is used as for Falsterbo CSIO.

Alternative maintenance: (apart from regular cutting and irrigation): Aerate and dress with sand in spring, fertilise and then do aeration regularly through the season. Overseed in areas with sparse growth.



SWEDISH EQUESTRIAN
FEDERATION

